

45MHz SERIES MCF

■ Features


- Compactness and light weight
- Excellent design against shock/vibration
- Low impedance

■ 45MHz Fundamental

Model	Nominal Frequency (MHz)	Pole	Pass Band-width		Attenuation Bandwidth		Ripple (dB)	Insertion Loss (dB)	Guaranteed Attenuation (fo-910kHz) (dB)	Terminating Impedance (Ω // pF)	Operating Temp. Range (°C)	Type
			(dB)	(kHz)	(dB)	(kHz)						
45S15BU	45	4	3	± 7.5	25	± 22	1.0	4.0	80	650//3 $C_c=9\text{pF}$	-20~+70	D-361-B
45S20BJ	45	4	3	± 10	25	± 25	1.0	3.0	80	800//2 $C_c=6.5\text{pF}$	-20~+70	D-361-B
45S30AJ	45	2	3	± 15	15	± 50	1.0	2.0	40	1200//1.5	-20~+70	D-361-A
45S30BN	45	4	3	± 15	35	± 50	1.0	4.0	80	800//1.8 $C_c=6.5\text{pF}$	-20~+70	D-361-B
45S34AD	45	2	3	± 17	15	± 60	1.0	2.5	65	870//0.2	-30~+80	D-361-A






D-361-A~B (mm)



D-361-B means a pair of D-361-A. When D-361-B is used, please use a coupling capacitance. C_c includes stray capacitance.

Connecting mark

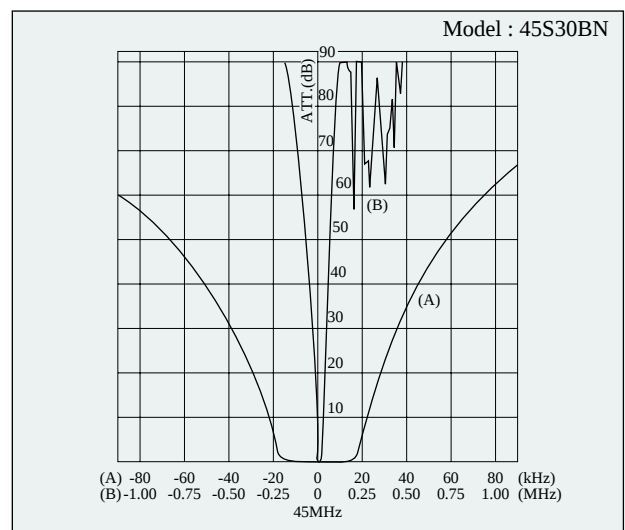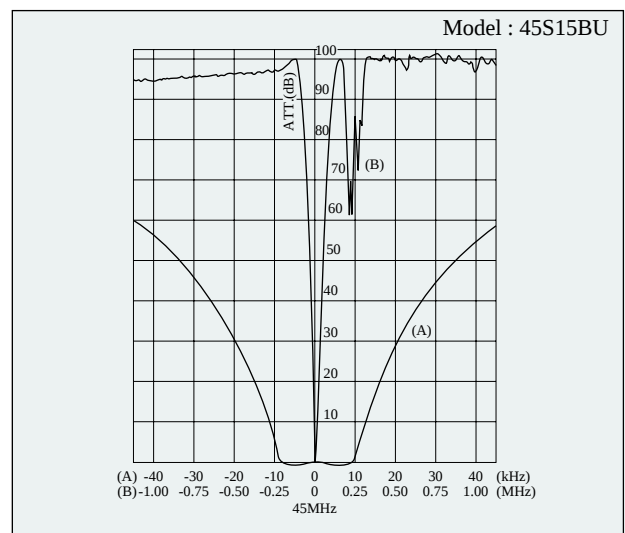


45MHz SERIES MCF

■ Features

- Compactness and light weight
- Stable temperature characteristics


■ 45MHz Overtone

Model	Nominal Frequency (MHz)	Pole	Pass Band-width		Attenuation Bandwidth		Ripple (dB)	Insertion Loss (dB)	Guaranteed Attenuation (fo-910kHz) (dB)	Terminating Impedance (k Ω // pF)	Operating Temp. Range (°C)	Type
			(dB)	(kHz)	(dB)	(kHz)						
45N7.5A	45	2	3	± 3.75	18	± 18	0.5	2.0	40	3//0.5	-20~+70	D-360-A
45N7.5BA	45	4	3	± 3.75	40	± 15	1.0	4.0	80	3//0.5 C _C =0pF	-20~+70	D-360-B
45N15A	45	2	3	± 7.5	15	± 22	0.5	1.5	40	2.5//1.2	-20~+70	D-360-A
45N15B	45	4	3	± 7.5	25	± 22	1.0	3.0	80	3//1 C _C =-1.2pF	-20~+70	D-360-B
45N20A	45	2	3	± 10	15	± 28	0.5	1.5	40	3//1	-30~+60	D-360-A
45N20B	45	4	3	± 10	25	± 25	1.0	3.0	75	3//1.3 C _C =-1.5pF	-30~+60	D-360-B
45N30A	45	2	3	± 15	15	± 50	1.0	2.0	30	8.5//1	-20~+70	D-360-A
45N30BE	45	4	6	± 15	30	± 50	1.0	3.0	67	6//1.2 C _C =-2pF	-20~+70	D-360-B

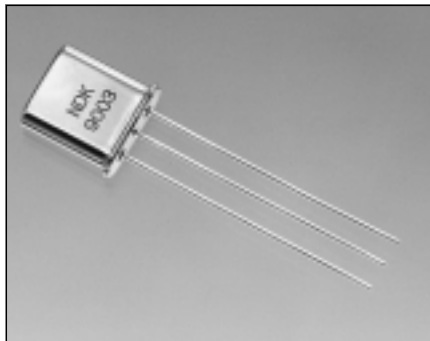


D-360-A~B


(mm)



D-360-B means a pair of D-360-A. When D-360-B is used, please use a coupling capacitance .



Model : 45N7.5A

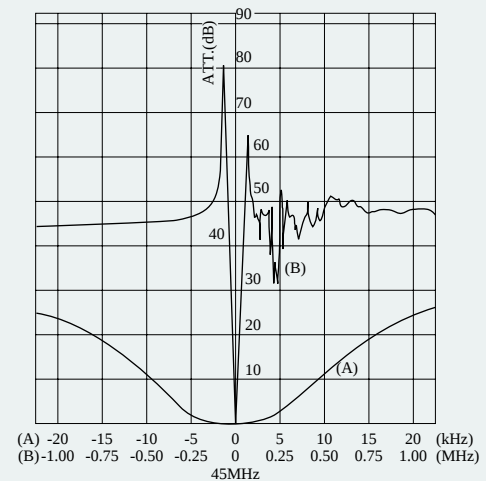

Model : 45N7.5BA

