


- A range of audio & video connectors incorporating many innovative features. Assembly and disassembly is screw less and is achieved by a few quick turns of the back shell.
- a range of coloured plastic coding rings, each with a single number moulded in, offer a quick and easy system of channel identification.
 - internal design features allow for a quick and simple insert assembly.
- (Note : these connectors are not to be used for mains applications)
- pressed socket contacts which 'float' to assist plug mating, also ensuring a positive 'wrap-round' contact with the pin, since they can 'move' with the pins should any movement occur between mating connectors.
 - a single piece latch which is simple to operate, mating smoothly with both lockable and non-latching connectors.
 - the strain relief collet ensures a positive cable grip.

Dimensions

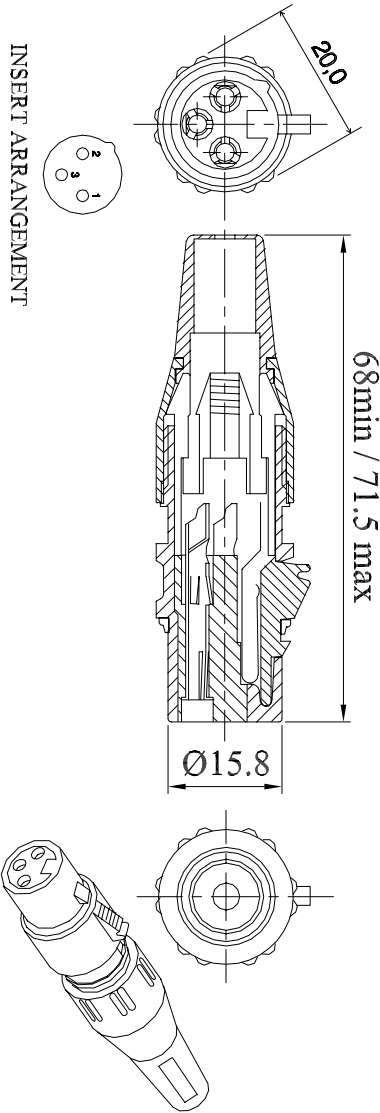

Deltron Part No	Silver Contacts		Gold Contacts	
	Nickel	Black	Nickel	Black
3-Way	700-0300	708-0300	704-0300	712-033

Mechanical Properties	Chuck and Screw Collar
Cable Retention	Ø 2,8mm to Ø 8,0mm
Cable Range	Zinc high pressure diecasting
Housing	
Contact Base	Valox DR48
Contacts	Phos Bronze (pressed), 3 m silver anti-tarnish finish, or 0,5 m gold
Latch	Zinc high pressure diecasting
Strain Relief	satin nickel or black chrome
Sealing Ring	P.V.C. (black)
Chuck	Santoprene (UL 94 HB)
Screw Collar	Acetal (UL 94 HB)
Screen	Zinc high pressure diecasting
Interchangeable	satin nickel or black chrome
Connector Ident	Spring Steel, 3 m silver anti-tarnish
Ident Options	Spring-on coloured rings
	Acetal (UL94 HB)
	Black, Brown, Red, Orange, Yellow,
	Green, Blue, Violet Grey, White
Operating Temp	-30°C to +80°C
Insertion Force	20N
Withdrawal Force	10N
Min No. Insertions	5000
Electrical Properties	
Number of Contacts	3
Rated Current per Contact	16 Amps
Maximum Wire Size	10 AWG
(solid)	6.0 mm2
Cap. Between Contacts	4 pf
Rated Voltage	250 Volts a.c
Test Voltage	1500 Volts a.c.
Contact Resistance	3 milli-ohms
Insulation Resistance	1 giga-ohms

CONVERTED FROM PS00804 ISS4 (22.08.97) IN JAN 2003

Drgn No 700-708-704-712 3 WAY	TITLE PROFESSIONAL QUALITY	- CABLE SOCKET		ALL DIMENSIONS IN MM			
				ANGLES IN DECIMAL DEGREES			

