

SMDインダクタ

SURFACE MOUNT HIGH CURRENT INDUCTOR



OPERATING TEMP	04, 05, 06タイプ	-25~+105℃	(製品自己発熱を含む)
	08タイプ	-25~+85℃	(Including self-generated heat)

特長 FEATURES

- ・省スペース及び低背化
- ・大電流対応
- ・SMT対応

- ・ Small surface area and low profile.
- ・ Designed for high current applications where a surface mount component is required.
- ・ Available in embossed tape and reel.

用途 APPLICATIONS

- ・ カーナビゲーション、デジタルビデオカメラ、ノート型パソコンなど各種機器の電源回路、DC/DCコンバータ等

Power supply circuits/DC-DC converters in a variety of applications where compact size is vital, such as digital camcorders, car navigation systems, notebook PCs, etc.

形名表記法 ORDERING CODE

1

形式	
N△	チョークコイル(非シールドタイプ)
N P	チョークコイル(シールドタイプ)
N H	チョークコイル(シールドタイプ)

△=スペース

2

コア寸法 (mm)	
04	4.7
05	5.6
06	6.8
08	9.0

3

形状	
D P	ドラム形(台座付き)
D△	ドラム形(台座なし)
S△, SZ	ドラム応用形

△=スペース

4

高さ寸法 (mm)				
	04タイプ	05タイプ	06タイプ	08タイプ
A	3.0max.	—	—	6.0max.
B	2.0max.	2.8max.	3.2max.	5.0max.

5

公称インダクタンス [μH]	
例	
1R0	1.0
100	10
102	1000

※R= 小数点

6

インダクタンス許容差	
J	± 5%
K	±10%
M	±20%
N	±30%

7

当社管理記号	
△△	標準品

△= スペース

N△06D△B101K○○

1

2

3

4

5

6

7

1

Type

N△	Choke coil (non-shielded type)
N P	Choke coil (shielded type)
N H	Choke coil (shielded type)

△=Blank space

2

Core dimension(mm)

04	4.7
05	5.6
06	6.8
08	9.0

3

Shape

D P	Drum type (With base)
D△	Drum type (Without base)
S△, SZ	Applied drum type

△=Blank space

4

Height(mm)

	04 type	05 type	06 type	08 type
A	3.0max.			6.0max.
B	2.0max.	2.8max.	3.2max.	5.0max.

5

Nominal inductance[μH]

example	
1R0	1.0
100	10
102	1000

※R=Decimal point

6

Inductance tolerance

J	± 5%
K	±10%
M	±20%
N	±30%

7

Internal code

△△	Standard product
----	------------------

△=Blank space

Type	非シールド Non-Shielded type		磁気シールド Shielded type				非シールド Non-Shielded type	
	N05D	N06D	NP04S		NP05D NH05D	NP06D NH06D	N08DP	
Fig.								
高さ記号 Height code	B	B	A	B, ZB	B	B	A	B
L	5.9±0.3 (0.232±0.012)	7.3±0.3 (0.287±0.012)	5.0±0.2 (0.197±0.008)	5.0±0.2 (0.197±0.008)	5.9±0.3 (0.232±0.012)	7.0±0.3 (0.276±0.012)	9.0±0.2 (0.354±0.008)	
W	6.1±0.3 (0.240±0.012)	7.5±0.3 (0.295±0.012)	5.0±0.2 (0.197±0.008)	5.0±0.2 (0.197±0.008)	6.1±0.3 (0.240±0.012)	7.5±0.3 (0.295±0.012)	10.6±0.2 (0.417±0.008)	
H(max.)	2.8 (0.110)	3.2 (0.126)	3.0 (0.118)	2.0 (0.079)	2.8 (0.110)	3.2 (0.126)	6.0 (0.236)	5.0 (0.197)
a	2.0±0.3 (0.079±0.012)	2.0±0.3 (0.079±0.012)	1.3±0.1 (0.051±0.004)	1.3±0.1 (0.051±0.004)	2.0±0.3 (0.079±0.012)	2.0±0.3 (0.079±0.012)	1.6±0.2 (0.063±0.008)	
b	4.2±0.3 (0.165±0.012)	5.7±0.3 (0.224±0.012)	5.8±0.3 (0.228±0.012)	5.8±0.3 (0.228±0.012)	4.2±0.3 (0.165±0.012)	5.7±0.3 (0.224±0.012)	5.1±0.2 (0.201±0.008)	

Unit : mm(inch)

概略バリエーション AVAILABLE INDUCTANCE RANGE

Type	N05D		N06D		NP04S				NP04SZ		NP05D		NH05D		NP06D		NH06D		N08DP			
高さ記号 (min.)	B (2.8max.)		B (3.2max.)		A (3.0max.)		B (2.0max.)		B (2.0max.)		B (2.8max.)		B (2.8max.)		B (3.2max.)		B (3.2max.)		A (6.0max.)		B (5.0max.)	
Inductance (H)	Rdc (Ω)	I _{max} (A)	Rdc (Ω)	I _{max} (A)	Rdc (Ω)	I _{max} (A)	Rdc (Ω)	I _{max} (A)	Rdc (Ω)	I _{max} (A)	Rdc (Ω)	I _{max} (A)	Rdc (Ω)	I _{max} (A)	Rdc (Ω)	I _{max} (A)	Rdc (Ω)	I _{max} (A)	Rdc (Ω)	I _{max} (A)	Rdc (Ω)	I _{max} (A)
1μ	0.021	3.7	0.021	3.9			0.036	1.3	0.060	2.0	0.016	3.0	0.016	4.2	0.018	4.0	0.019	4.6	0.028	3.9	0.023	4.0
10μ	0.1	1.6	0.079	1.7	0.052	0.9	0.066	0.9		1.2	0.062	1.0	0.062	1.3	0.074	1.2	0.075	2.0	0.066	2.2	0.069	2.2
100μ	0.83	0.55	0.68	0.6							0.84	0.32	0.84	0.45	0.70	0.42	0.70	0.55	0.35	1.05	0.49	0.82
1000μ			8.2	0.16											7.1	0.12	7.1	0.17	3.1	0.34	4.4	0.27

セクションガイド
Selection Guide

アイテム一覧
Part Numbers

特性図
Electrical Characteristics

梱包
Packaging

信頼性
Reliability Data

使用上の注意
Precautions



etc



NP04SAシールドタイプ Shielded type

形 名 Ordering code	公 称 インダクタンス Inductance [μH]	インダクタンス 許容差 Inductance Tolerance	自己共振 周 波 数 Self-resonant frequency [MHz] (min.)	直流抵抗 DC Resistance [Ω] (max.) (typ.)		定格電流 Rated current [A] (max.)	測 定 周波数 Measuring frequency
NP04S A100M	10	±20%	20	0.052	0.045	0.9	1kHz
NP04S A220M	22		13	0.11	0.90	0.53	
NP04S A330M	33		12	0.16	0.13	0.44	

NP04SBシールドタイプ Shielded type

形 名 Ordering code	公 称 インダクタンス Inductance [μH]	インダクタンス 許容差 Inductance Tolerance	自己共振 周 波 数 Self-resonant frequency [MHz] (min.)	直流抵抗 DC Resistance [Ω] (max.) (typ.)		定格電流 Rated current [A] (max.)	測 定 周波数 Measuring frequency
NP04S B3R3N	3.3	±30%	40	0.036	0.030	1.3	1kHz
NP04S B4R7N	4.7		30	0.050	0.033	1.2	
NP04S B6R8N	6.8		27	0.053	0.043	1.05	
NP04S B100M	10	±20%	19	0.066	0.054	0.9	
NP04S B150M	15		15	0.12	0.10	0.62	
NP04S B220M	22		12	0.15	0.12	0.51	
NP04S B330M	33		10	0.26	0.21	0.42	
NP04S B470M	47		8	0.32	0.27	0.38	

NP04SZシールドタイプ Shielded type

形 名 Ordering code	公 称 インダクタンス Inductance [μH]	インダクタンス 許容差 Inductance Tolerance	自己共振 周 波 数 Self-resonant frequency [MHz] (min.)	直流抵抗 DC Resistance [Ω] (max.) (typ.)		定格電流 Rated current [A] (max.)	測 定 周波数 Measuring frequency
NP04SZB 3R3N	3.3	±30%	30	0.060	0.040	2.0	1kHz
NP04SZB 4R7N	4.7		27	0.10	0.075	1.6	
NP04SZB 6R8N	6.8		19	0.12	0.090	1.4	
NP04SZB 100M	10	±20%	15	0.13	0.10	1.2	
NP04SZB 150M	15		12	0.25	0.18	0.95	
NP04SZB 220M	22		10	0.30	0.21	0.77	

N05DB 非シールドタイプ Non-Shielded type

形 名 Ordering code	公 称 インダクタンス Inductance [μH]	インダクタンス 許容差 Inductance Tolerance	自己共振 周 波 数 Self-resonant frequency [MHz] (min.)	直流抵抗 DC Resistance [Ω] (max.)	定格電流 Rated current [A] (max.)	測 定 周波数 Measuring frequency
N 05D B1R0M	1.0	±20%	85	0.021	3.7	1kHz
N 05D B1R5M	1.5		69	0.025	3.2	
N 05D B2R2M	2.2		51	0.032	2.9	
N 05D B3R3M	3.3		45	0.040	2.5	
N 05D B4R7M	4.7		35	0.049	2.2	
N 05D B6R8M	6.8		30	0.070	2.1	
N 05D B100K	10	±10%	25	0.10	1.6	
N 05D B150K	15		24	0.16	1.40	
N 05D B220K	22		18	0.22	1.20	
N 05D B330K	33		14	0.35	0.80	
N 05D B470K	47		12	0.43	0.75	
N 05D B680K	68		9.7	0.66	0.65	
N 05D B101K	100		8.3	0.83	0.55	

NP05DB シールドタイプ Shielded type

形 名 Ordering code	公 称 インダクタンス Inductance [μH]	インダクタンス 許容差 Inductance Tolerance	自己共振 周 波 数 Self-resonant frequency [MHz] (min.)	直流抵抗 DC Resistance [Ω] (max.)	定格電流 Rated current [A] (max.)	測 定 周波数 Measuring frequency
NP05D B1R0M	1.0	±20%	86	0.019	3.0	1kHz
NP05D B1R5M	1.5		68	0.023	2.7	
NP05D B2R2M	2.2		54	0.026	2.1	
NP05D B3R3M	3.3		41	0.031	1.8	
NP05D B4R7M	4.7		34	0.038	1.4	
NP05D B6R8M	6.8		26	0.053	1.1	
NP05D B100M	10		25	0.062	1.0	
NP05D B150M	15		20	0.097	0.80	
NP05D B220M	22		16	0.15	0.69	
NP05D B330M	33		13	0.24	0.54	
NP05D B470M	47		11	0.40	0.46	
NP05D B680M	68		9.5	0.46	0.40	
NP05D B101M	100		7.7	0.84	0.32	

NH05DB シールドタイプ Shielded type

形 名 Ordering code	公 称 インダクタンス Inductance [μH]	インダクタンス 許容差 Inductance Tolerance	自己共振 周 波 数 Self-resonant frequency [MHz] (min.)	直流抵抗 DC Resistance [Ω] (max.)	定格電流 Rated current [A] (max.)	測 定 周波数 Measuring frequency
NH05D B1R0M	1.0	±20%	86	0.016	4.2	1kHz
NH05D B1R5M	1.5		68	0.020	3.3	
NH05D B2R2M	2.2		54	0.023	2.7	
NH05D B3R3M	3.3		41	0.031	2.4	
NH05D B4R7M	4.7		34	0.038	2.0	
NH05D B6R8M	6.8		26	0.056	1.7	
NH05D B100M	10		25	0.062	1.3	
NH05D B150M	15		20	0.097	1.10	
NH05D B220M	22		16	0.15	0.90	
NH05D B330M	33		13	0.24	0.72	
NH05D B470M	47		11	0.40	0.66	
NH05D B680M	68		9.5	0.46	0.53	
NH05D B101M	100		7.7	0.84	0.45	

N06DB 非シールドタイプ Non-Shielded type

形 名 Ordering code	公 称 インダクタンス Inductance [μH]	インダクタンス 許容差 Inductance Tolerance	自己共振 周 波 数 Self-resonant frequency [MHz] (min.)	直流抵抗 DC Resistance [Ω] (max.)	定格電流 Rated current [A] (max.)	測 定 周波数 Measuring frequency
N 06D B1R0M	1.0	±20%	87	0.021	3.9	1kHz
N 06D B2R2M	2.2		53	0.029	3.2	
N 06D B4R7M	4.7		33	0.046	2.5	
N 06D B100K	10	±10%	22	0.079	1.7	
N 06D B150K	15		18	0.12	1.3	
N 06D B220K	22		13	0.17	1.1	
N 06D B330K	33		9.8	0.25	0.95	
N 06D B470K	47		8.8	0.32	0.80	
N 06D B680K	68		8.1	0.45	0.70	
N 06D B101K	100		7.9	0.68	0.60	
N 06D B151K	150		6.0	1.0	0.48	
N 06D B221K	220		5.2	1.4	0.40	
N 06D B331K	330		4.4	2.3	0.32	
N 06D B471K	470		3.4	3.6	0.25	
N 06D B681K	680		2.6	4.6	0.21	
N 06D B102J	1000	±5%	2.1	8.2	0.16	

NP06DB シールドタイプ Shielded type

形 名 Ordering code	公 称 インダクタンス Inductance [μH]	インダクタンス 許容差 Inductance Tolerance	自己共振 周 波 数 Self-resonant frequency [MHz] (min.)	直流抵抗 DC Resistance [Ω] (max.)	定格電流 Rated current [A] (max.)	測 定 周波数 Measuring frequency
NP06D B1R0M	1.0	±20%	90	0.018	4.0	1kHz
NP06D B1R5M	1.5		71	0.022	3.0	
NP06D B2R2M	2.2		53	0.025	2.8	
NP06D B3R3M	3.3		39	0.033	2.3	
NP06D B4R7M	4.7		36	0.037	2.0	
NP06D B6R8M	6.8		28	0.051	1.7	
NP06D B100M	10		20	0.074	1.2	
NP06D B150M	15		17	0.11	1.1	
NP06D B220M	22		14	0.16	0.90	
NP06D B330M	33		10	0.21	0.78	
NP06D B470M	47		9.3	0.30	0.64	
NP06D B680M	68		8.0	0.45	0.51	
NP06D B101M	100		6.7	0.70	0.42	
NP06D B151M	150		5.3	0.89	0.34	
NP06D B221M	220		4.8	1.5	0.28	
NP06D B331M	330		3.7	2.5	0.24	
NP06D B471M	470		3.0	3.0	0.18	
NP06D B681M	680		2.5	5.5	0.16	
NP06D B102M	1000		2.0	7.1	0.12	

NH06DB シールドタイプ Shielded type

形 名 Ordering code	公 称 インダクタンス Inductance [μH]	インダクタンス 許容差 Inductance Tolerance	自己共振 周 波 数 Self-resonant frequency [MHz] (min.)	直流抵抗 DC Resistance [Ω] (max.)	定格電流 Rated current [A] (max.)	測 定 周波数 Measuring frequency
NH06D B1R0M	1.0	±20%	90	0.019	4.6	1kHz
NH06D B1R5M	1.5		71	0.023	4.0	
NH06D B2R2M	2.2		53	0.026	3.4	
NH06D B3R3M	3.3		39	0.034	3.3	
NH06D B4R7M	4.7		36	0.038	3.0	
NH06D B6R8M	6.8		28	0.052	2.5	
NH06D B100M	10		20	0.075	2.0	
NH06D B150M	15		17	0.11	1.7	
NH06D B220M	22		14	0.16	1.4	
NH06D B330M	33		10	0.21	1.1	
NH06D B470M	47		9.3	0.31	0.83	
NH06D B680M	68		8.0	0.45	0.69	
NH06D B101M	100		6.7	0.70	0.55	
NH06D B151M	150		5.3	0.89	0.45	
NH06D B221M	220		4.8	1.5	0.38	
NH06D B331M	330		3.7	2.5	0.31	
NH06D B471M	470		3.0	3.0	0.26	
NH06D B681M	680		2.5	5.5	0.21	
NH06D B102M	1000		2.0	7.1	0.17	










N08DPA 非シールドタイプ Non-Shielded type



形 名 Ordering code	公 称 インダクタンス Inductance [μH]	インダクタンス 許容差 Inductance Tolerance	自己共振 周 波 数 Self-resonant frequency [MHz] (min.)	直流抵抗 DC Resistance [Ω] (max.)	定格電流 Rated current [A] (max.)	測 定 周波数 Measuring frequency
N 08DPA1R0M	1.0	±20%	86	0.028	3.9	1kHz
N 08DPA1R5M	1.5		69	0.030	3.4	
N 08DPA2R2M	2.2		58	0.036	3.2	
N 08DPA3R3M	3.3		50	0.039	3.0	
N 08DPA4R7M	4.7		30	0.047	2.6	
N 08DPA6R8M	6.8		21	0.057	2.4	
N 08DPA100K	10	±10%	18	0.066	2.2	
N 08DPA120K	12		16	0.077	2.1	
N 08DPA150K	15		14	0.087	2.0	
N 08DPA180K	18		13	0.092	1.9	
N 08DPA220K	22		11	0.11	1.8	
N 08DPA270K	27		10	0.12	1.6	
N 08DPA330K	33		9.5	0.14	1.55	
N 08DPA390K	39		8.9	0.15	1.5	
N 08DPA470K	47		8.6	0.17	1.4	
N 08DPA560K	56		8.3	0.19	1.35	
N 08DPA680K	68		7.9	0.23	1.3	
N 08DPA820K	82		7.3	0.30	1.1	
N 08DPA101K	100		6.7	0.35	1.05	
N 08DPA121K	120		6.5	0.40	0.95	
N 08DPA151K	150		6.0	0.55	0.80	
N 08DPA181K	180		4.9	0.62	0.76	
N 08DPA221K	220		4.1	0.80	0.66	
N 08DPA271K	270		3.4	0.90	0.63	
N 08DPA331K	330		3.2	1.1	0.59	
N 08DPA391K	390		2.9	1.2	0.54	
N 08DPA471K	470		2.6	1.5	0.50	
N 08DPA561K	560		2.4	1.7	0.45	
N 08DPA681K	680		2.2	2.4	0.38	
N 08DPA821K	820		1.9	2.6	0.36	
N 08DPA102J	1000	±5%	1.8	3.1	0.34	

N08DPB 非シールドタイプ Non-Shielded type


形 名 Ordering code	公 称 インダクタンス Inductance [μH]	インダクタンス 許容差 Inductance Tolerance	自己共振 周 波 数 Self-resonant frequency [MHz] (min.)	直流抵抗 DC Resistance [Ω] (max.)	定格電流 Rated current [A] (max.)	測 定 周波数 Measuring frequency
N 08DPB1R0M	1.0	±20%	98	0.023	4.0	1kHz
N 08DPB1R5M	1.5		73	0.028	3.7	
N 08DPB2R2M	2.2		56	0.032	3.4	
N 08DPB3R3M	3.3		42	0.037	3.2	
N 08DPB4R7M	4.7		32	0.047	2.7	
N 08DPB6R8M	6.8		26	0.057	2.4	
N 08DPB100K	10	±10%	21	0.069	2.2	
N 08DPB120K	12		20	0.074	2.1	
N 08DPB150K	15		17	0.087	2.0	
N 08DPB180K	18		16	0.099	1.9	
N 08DPB220K	22		14	0.12	1.8	
N 08DPB270K	27		13	0.15	1.5	
N 08DPB330K	33		12	0.18	1.4	
N 08DPB390K	39		11	0.19	1.3	
N 08DPB470K	47		10	0.22	1.2	
N 08DPB560K	56		9.2	0.29	1.1	
N 08DPB680K	68		8.3	0.34	1.0	
N 08DPB820K	82		7.6	0.39	0.94	
N 08DPB101K	100		7.3	0.49	0.82	
N 08DPB121K	120		6.8	0.54	0.79	
N 08DPB151K	150		6.2	0.66	0.75	
N 08DPB181K	180		5.8	0.75	0.68	
N 08DPB221K	220		5.0	0.92	0.63	
N 08DPB271K	270		4.5	1.1	0.56	
N 08DPB331K	330		4.2	1.5	0.48	
N 08DPB391K	390		4.0	1.7	0.45	
N 08DPB471K	470		3.0	2.1	0.41	
N 08DPB561K	560		2.7	2.4	0.38	
N 08DPB681K	680		2.5	2.7	0.36	
N 08DPB821K	820		2.4	3.1	0.33	
N 08DPB102J	1000	±5%	2.1	4.4	0.27	

直流重畳特性例 DC Bias characteristics(Measured by HP4262A)

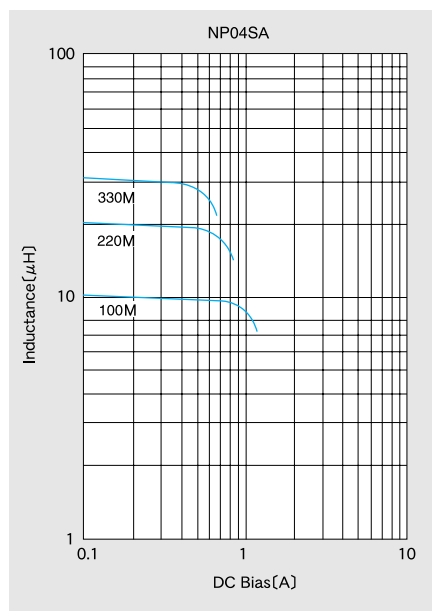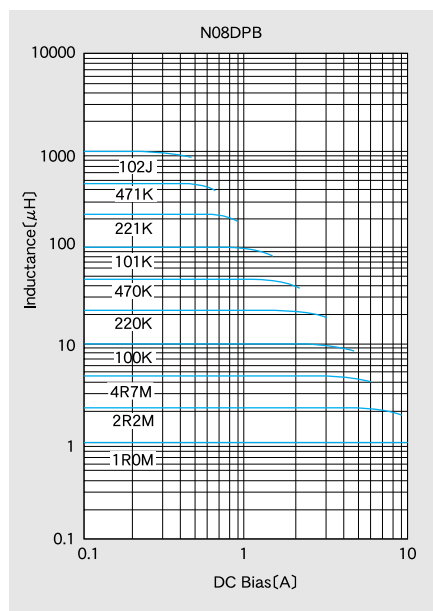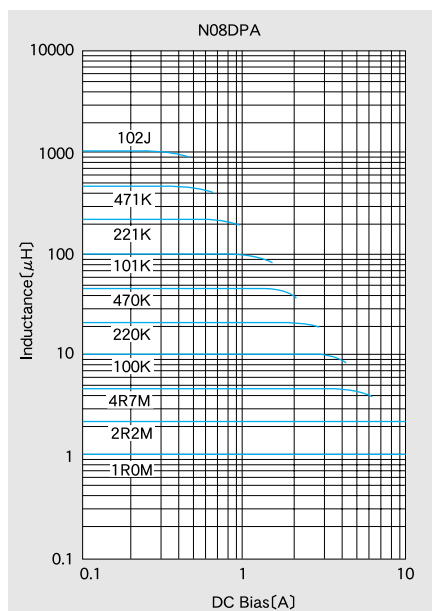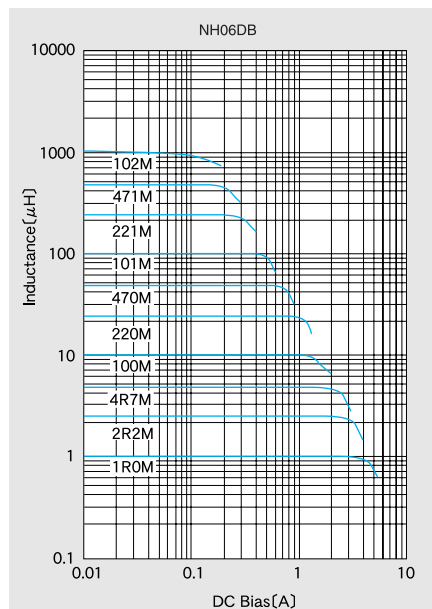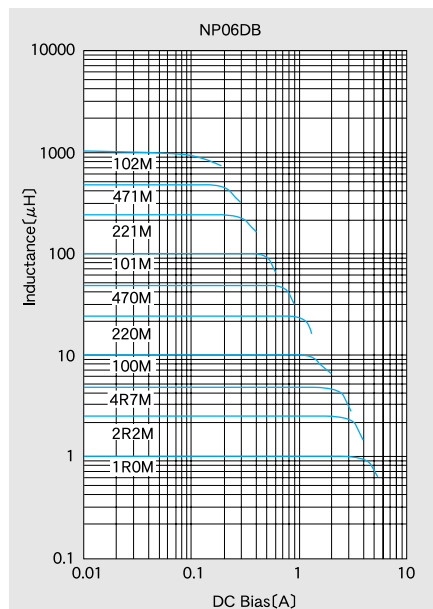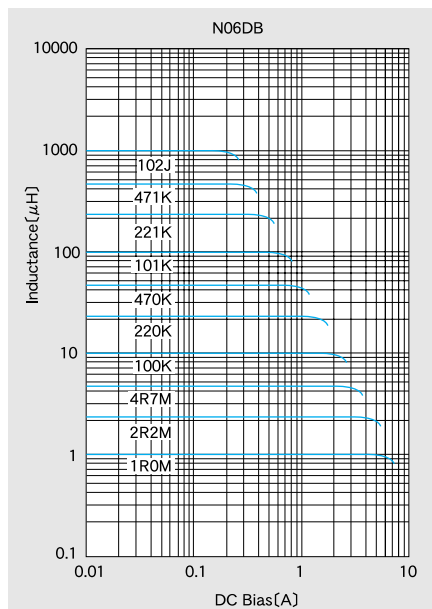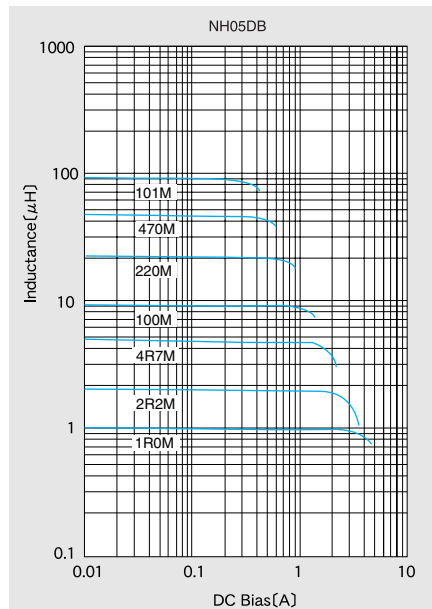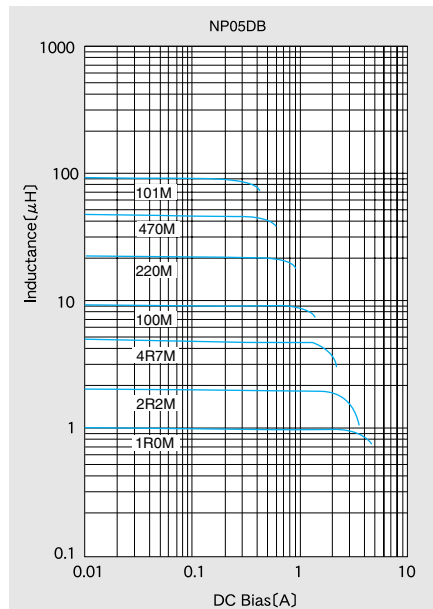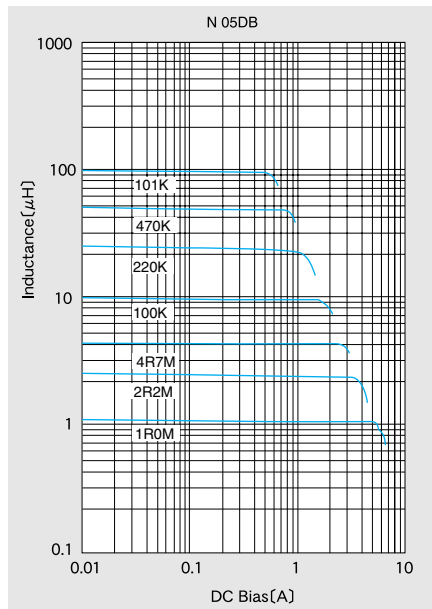

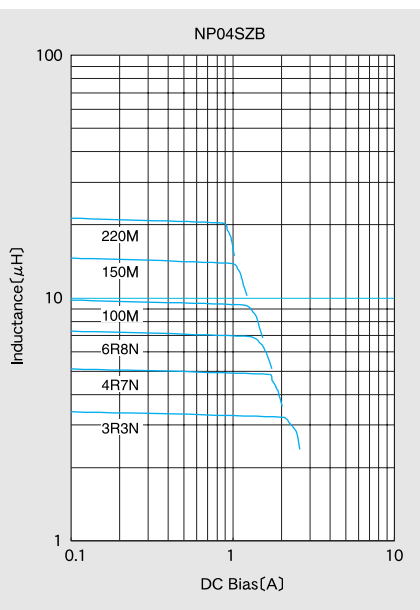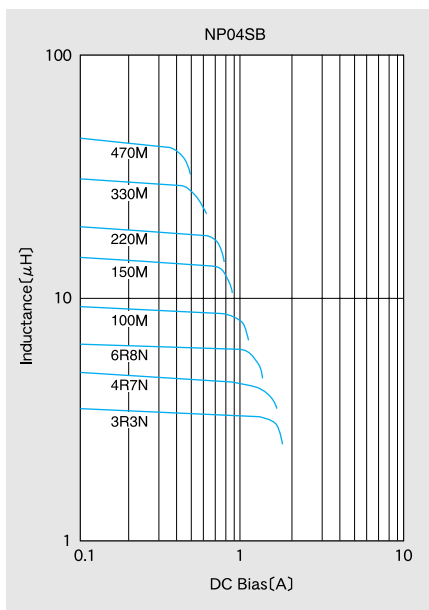



温度特性例 Temperature characteristics (Measured by HP4262A)

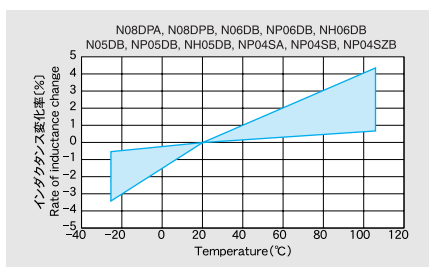

①最小受注単位数 Minimum Quantity


形 式 Type	高さ記号 Height code	標準数量 Standard quantity(pcs.) テーピング Taped
NP04S	A	2000
NP04S, SZ	B	3000
N05D	B	1500
NP05D/NH05D	B	1500
N06D	B	1500
NP06D/NH06D	B	1500
N08DP	A	1000
N08DP	B	1500

②テーピング材質 Tape Material

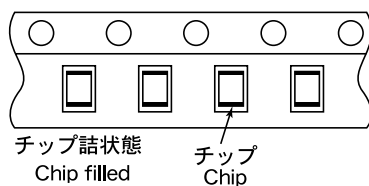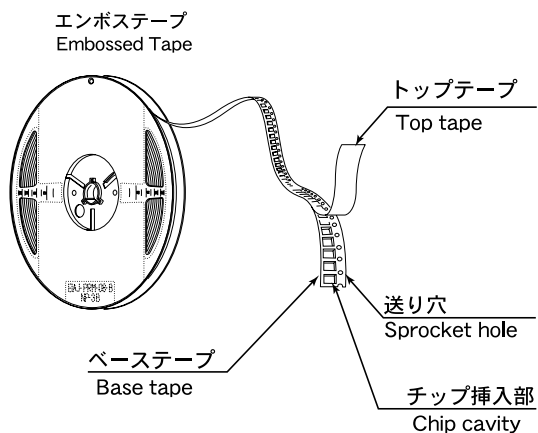

③テーピング寸法 Taping dimensions

(1)エンボステープ (16mm幅) Embossed tape(0.63 inches wide)

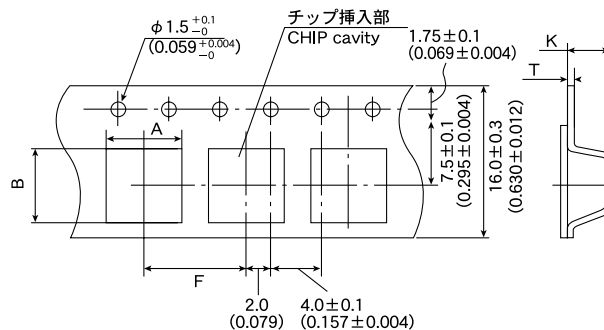


形 式 Type	高さ記号 Height code	チップ挿入部 Chip cavity		挿入ピッチ Insertion pitch F	テープ厚み Tape thickness	
		A	B		K	T
N 05D	B	6.1 (0.240)	6.3 (0.248)	12 (0.472)	3.4 (0.134)	0.4 (0.016)
NP05D NH05D	B	6.1 (0.240)	6.3 (0.248)	12 (0.472)	3.4 (0.134)	0.4 (0.016)
N06D	B	7.5 (0.295)	7.7 (0.303)	12 (0.472)	3.5 (0.138)	0.4 (0.016)
NP06D NH06D	B	7.5 (0.295)	7.7 (0.303)	12 (0.472)	3.5 (0.138)	0.4 (0.016)

Unit : mm(inch)

公差のない数値は参考値です。

The values without tolerance are for reference only.

Item	Specified Value					Test Method and Remarks										
	Surface Mount High current inductors 08 Type	Surface Mount High current inductors 04/05/06 Type	CommonMode Choke Coils CM04RC	CommonMode Choke Coils BU05MC	Balun Transformers BU05MC											
1.Operating Temperature Range	−25℃~+85℃	−25~+105℃				Including self-generated heat										
2.Storage Temperature Range	−40℃~+85℃					Commom mode choke coil Balun transformers : −5 to +40℃ in taped packaging										
3.Rated current	Within the specification		Within the specified tolerance			MSD inductor : The maximum DC value having inductance decrease within specified value and temperature increase within 40℃ by the application of DC bias. Inductance decrease <table><tr><td>04, NH05, NH06</td><td>05</td><td>06</td></tr><tr><td>30%</td><td>20%</td><td>10%</td></tr></table> Commom mode choke coil : The maximum DC value having temperature increase within specified temperature,as detailed in individual specification.	04, NH05, NH06	05	06	30%	20%	10%				
04, NH05, NH06	05	06														
30%	20%	10%														
4.Impedance			Within the specified tolerance			Commom mode choke coil : Measuring equipment : HP 4291A or its equivalent Measuring frequency : Specified frequency										
5. Inductance	Within the specified tolerance				Refer to individual specification	SMD inductor : Measuring equipment : HP 4284A or its equivalent Measuring frequency : 1kHz Measuring voltage : 1V osc. Measurement in series connection										
6.DC Resisittance	Within the specified tolerance					SMD transformer・SMD inductor・Commom mode choke coil : Measuring equipment : DC ohmmeter										
7.Self resonance frequency	Within the specification					SMD inductor : Measuring equipment : Impedance analyzer (HP 4191A, 4192A) or its equivalent										
8.Temperature characteristic	04, 05, 06 Type : Within ±10% 08Type : Within±5%					SMD inductor : Change of maximum inductance deviation in step 1 to 5 <table><tr><td>Temperature at step 1</td><td>20℃</td></tr><tr><td>Temperature at step 2</td><td>Minimum operating temperature</td></tr><tr><td>Temperature at step 3</td><td>20℃ (Standard temperature)</td></tr><tr><td>Temperature at step 4</td><td>Maximum operating temperature</td></tr><tr><td>Temperature st step 5</td><td>20℃</td></tr></table>	Temperature at step 1	20℃	Temperature at step 2	Minimum operating temperature	Temperature at step 3	20℃ (Standard temperature)	Temperature at step 4	Maximum operating temperature	Temperature st step 5	20℃
Temperature at step 1	20℃															
Temperature at step 2	Minimum operating temperature															
Temperature at step 3	20℃ (Standard temperature)															
Temperature at step 4	Maximum operating temperature															
Temperature st step 5	20℃															
9.Resisistance to flexure of substrate			Refer to individual specification.			Commom mode choke coil : Accoeding to JIS C0051 <table><tr><td></td><td>CM04RC・BU05MC</td></tr><tr><td>Warp</td><td>3mm</td></tr><tr><td>Pressing speed</td><td>0.5mm/sec.</td></tr><tr><td>Duration</td><td>5±1sec.</td></tr></table> Pressig jig 		CM04RC・BU05MC	Warp	3mm	Pressing speed	0.5mm/sec.	Duration	5±1sec.		
	CM04RC・BU05MC															
Warp	3mm															
Pressing speed	0.5mm/sec.															
Duration	5±1sec.															

Item	Specified Value					Test Method and Remarks												
	Surface Mount High current inductors 08 Type	Surface Mount High current inductors 04/05/06 Type	CommonMode Choke Coils CM04RC	CommonMode Choke Coils BU05MC	Balun Transformers BU05MC													
10.Standard donndityonn	Note on standard condition: "standard condition" referred to herein is defined as follows: 5 to 35℃ of temperature, 45 to 85% relative humidity and 86 to 106kPa of air pressure. When there are questions concerning measurement results: In order to provide correlation data, the test shall be conducted under condition of 20±2℃ of tempera- ture, 45 to 85% relative humidity and 86 to 106kPa of air pressure. Unless otherwise specified, all the tests are conducted under the "standard condition."																	
11.Insulation resistance : between wires	100MΩ min.					SMD inductor : Applied voltage : 100VDC Duration : 60sec. Commom mode choke coil : Applied voltage : Rated voltage Duration : 60 sec.												
12.Insulation resistance : between wire and core	100MΩ min.					SMD inductor : Applied voltage : 100VDC Duration : 60sec.												
13.Rated current			Within the specification															
14.Withstanding voltage : between wires			No abnormality			Commom mode choke coil : Applied voltage : Regulation voltage Duration : 60 sec.												
15.Withstanding voltage : between wire and core	No abnormality					SMD inductor : Applied voltage : 500VAC Duration : 60 sec.												
16.Adhesion of terminal elec- trode	No abnormality					SMD inductor : Set testing jigs perpendicularly to top surface of specimen mounted on printed board, and apply specified static load for 5 sec. Specified static load <table><tr><th>Type</th><th>static load</th></tr><tr><td>N08DP</td><td>10N</td></tr><tr><td>NP04S</td><td rowspan="6">5N</td></tr><tr><td>N05D</td></tr><tr><td>NP05D</td></tr><tr><td>NH05D</td></tr><tr><td>N06D</td></tr><tr><td>NP06D</td></tr><tr><td>NH06D</td></tr></table>	Type	static load	N08DP	10N	NP04S	5N	N05D	NP05D	NH05D	N06D	NP06D	NH06D
Type	static load																	
N08DP	10N																	
NP04S	5N																	
N05D																		
NP05D																		
NH05D																		
N06D																		
NP06D																		
NH06D																		
17.Resisitance to vibration	Impedance change : Within : ±5%		Refer to individual specification.			SMD inductor, Commom mode choke coil : Accoding to JIS C0040 Directions : 2 hrs each in X, Y, and Z directions. Total : 6 hrs Frequency range : 10 to 55 to 10 Hz (1 min.) Amplitude : 1.5mm (Shall not exceed acceleration 196m/s²) Mounting method : soldering onto printed board Recovery : At least 2 hrs of recovery under the standard condition after the test,followed by the mea- surement within 24 hrs. A kind of vibration : A												
18.Solderability	95% or more of mounting terminal side shall be covered with tresh solder.		At least 75% of terminal electrode is covered by new solder.			SMD inductor Solder temperature : 230±5℃ Duration : 2±0.5 sec. Immersion depth : All sides of mounting terminal shall be immersed. Commom mode choke coil : <table><tr><td></td><td>CM04RC・BU05MC</td></tr><tr><td>Solder temperature</td><td>235±5℃</td></tr><tr><td>Duration</td><td>2±0.5 sec.</td></tr><tr><td>Immersion depth</td><td>Up to 0.5mm from terminal root</td></tr></table>		CM04RC・BU05MC	Solder temperature	235±5℃	Duration	2±0.5 sec.	Immersion depth	Up to 0.5mm from terminal root				
	CM04RC・BU05MC																	
Solder temperature	235±5℃																	
Duration	2±0.5 sec.																	
Immersion depth	Up to 0.5mm from terminal root																	

Item	Specified Value					Test Method and Remarks																																																				
	Surface Mount High current inductors 08 Type	Surface Mount High current inductors 04/05/06 Type	CommonMode Choke Coils CM04RC	CommonMode Choke Coils BU05MC	Balun Transformers BU05MC																																																					
19.Resistance to soldering heat	No abnormality		Refer to individual specification.			SMD inductor (Reflow soldering) <table><tr><td>Temperature range</td><td>150~180℃</td><td>200℃min</td><td>Peak temperature240~250℃</td></tr><tr><td>Duration</td><td>100~120sec</td><td>40~60sec</td><td>Within 5sec</td></tr></table> Recommended reflow conditions Recovery : At least 2 hrs of recovery under the standard condition after the rmoval from test chamber, followed by the measurement within 24 hrs. Commom mode choke coil : ① Reflow soldering Preheating : 100 to 150℃ 1 to 2min. Peak : 230 to 240℃ Within 5sec. More than 200℃ Within 40 sec. Number of reflow : Within 2 times. ② Manual soldering Solder temperature : 350±5℃ Duration : 3±1sec. Recovery : 1 to 2 hrs of recovery under the standard condition after the test.	Temperature range	150~180℃	200℃min	Peak temperature240~250℃	Duration	100~120sec	40~60sec	Within 5sec																																												
Temperature range	150~180℃	200℃min	Peak temperature240~250℃																																																							
Duration	100~120sec	40~60sec	Within 5sec																																																							
20.Thermal shock	Inductance change : Within : ±10%		Refer to individual specification.			SMD inductor Accoding to JIS C0025 SMD inductor(08 type) <table><tr><th colspan="3">Conditions of 1 cycle</th></tr><tr><th>Step</th><th>Temperature(℃)</th><th>Duration(min)</th></tr><tr><td>1</td><td>-25⁺⁰₋₃</td><td>30±3</td></tr><tr><td>2</td><td>Room temperature</td><td>Within 3</td></tr><tr><td>3</td><td>+85⁺²₋₀</td><td>30±3</td></tr><tr><td>4</td><td>Room temperature</td><td>Within 3</td></tr></table> SMD inductor(04, 05, 06 type) <table><tr><th colspan="3">Conditions of 1 cycle</th></tr><tr><th>Step</th><th>Temperature(℃)</th><th>Duration(min)</th></tr><tr><td>1</td><td>-25⁺⁰₋₃</td><td>30±3</td></tr><tr><td>2</td><td>Room temperature</td><td>Within 3</td></tr><tr><td>3</td><td>+105⁺²₋₀</td><td>30±3</td></tr><tr><td>4</td><td>Room temperature</td><td>Within 3</td></tr></table> Number of cycle : 10 cycles Recovery : At least 2 hrs of recovry under the standard condition after the removal from test chamber, followed by the measurement within 24 hrs. Commom mode choke coil : Accoding to JIS C0025 Conditions of 1 cycle <table><tr><th rowspan="2"></th><th>Temperature(℃)</th><th rowspan="2">Duration(min)</th></tr><tr><th>CM04RC・BU05MC</th></tr><tr><td>1</td><td>-25±3℃</td><td>30±3</td></tr><tr><td>2</td><td>Room temperature</td><td>3</td></tr><tr><td>3</td><td>85±2℃</td><td>30±3</td></tr><tr><td>4</td><td>Room temperature</td><td>3</td></tr></table> Number of cycle : 10 cycles Recovery : 1~2 hrs of recovery under the standard condition after removal from test chamber.	Conditions of 1 cycle			Step	Temperature(℃)	Duration(min)	1	-25 ⁺⁰ ₋₃	30±3	2	Room temperature	Within 3	3	+85 ⁺² ₋₀	30±3	4	Room temperature	Within 3	Conditions of 1 cycle			Step	Temperature(℃)	Duration(min)	1	-25 ⁺⁰ ₋₃	30±3	2	Room temperature	Within 3	3	+105 ⁺² ₋₀	30±3	4	Room temperature	Within 3		Temperature(℃)	Duration(min)	CM04RC・BU05MC	1	-25±3℃	30±3	2	Room temperature	3	3	85±2℃	30±3	4	Room temperature	3
Conditions of 1 cycle																																																										
Step	Temperature(℃)	Duration(min)																																																								
1	-25 ⁺⁰ ₋₃	30±3																																																								
2	Room temperature	Within 3																																																								
3	+85 ⁺² ₋₀	30±3																																																								
4	Room temperature	Within 3																																																								
Conditions of 1 cycle																																																										
Step	Temperature(℃)	Duration(min)																																																								
1	-25 ⁺⁰ ₋₃	30±3																																																								
2	Room temperature	Within 3																																																								
3	+105 ⁺² ₋₀	30±3																																																								
4	Room temperature	Within 3																																																								
	Temperature(℃)	Duration(min)																																																								
	CM04RC・BU05MC																																																									
1	-25±3℃	30±3																																																								
2	Room temperature	3																																																								
3	85±2℃	30±3																																																								
4	Room temperature	3																																																								

Item	Specified Value					Test Method and Remarks										
	Surface Mount High current inductors 08 Type	Surface Mount High current inductors 04/05/06 Type	CommonMode Choke Coils CM04RC	CommonMode Choke Coils BU05MC	Balun Transformers BU05MC											
21.Damp heat (steady state)			Refer to individual specification.			Commom mode choke coil : <table><tr><td></td><td>CM04RC・BU05MC</td></tr><tr><td>Temperature</td><td>40±2℃</td></tr><tr><td>Humidity</td><td>90～95%</td></tr><tr><td>Duration</td><td>1000±24</td></tr></table>		CM04RC・BU05MC	Temperature	40±2℃	Humidity	90～95%	Duration	1000±24		
	CM04RC・BU05MC															
Temperature	40±2℃															
Humidity	90～95%															
Duration	1000±24															
22.Loading under damp heat	Inductance change : Within : ±10%		Refer to individual specification.			SMD inductor : Temperature : 40±2℃ Humidity : 90～95% Applied current : Rated current Duration : 240±2hrs Recovery : At least 2 hrs of recvery under the standard condition after rhe removal from test chamber, followed by the measurement within 24 hrs. Commom mode choke coil : <table><tr><td></td><td>CM04RC・BU05MC</td></tr><tr><td>Temperature</td><td>40±2℃</td></tr><tr><td>Humidity</td><td>90～95%</td></tr><tr><td>Applied current</td><td>Rated current</td></tr><tr><td>Duration</td><td>1000±24</td></tr></table> Recovery : 1～2 hrs of recovery under the standard condi- tion after the removed from test chamber		CM04RC・BU05MC	Temperature	40±2℃	Humidity	90～95%	Applied current	Rated current	Duration	1000±24
	CM04RC・BU05MC															
Temperature	40±2℃															
Humidity	90～95%															
Applied current	Rated current															
Duration	1000±24															
23.High temperature life test	Inductance change : Within : ±10%		Refer to individual specification.			SMD inductor : Temperature : SMD inductor : 105±3℃ Duration : SMD inductor : 240±2hrs Recovery : At least 2 hrs of recvery under the standard condition after rhe removal from test chamber, followed by the measurement within 24 hrs. Commom mode choke coil : <table><tr><td></td><td>CM04RC・BU05MC</td></tr><tr><td>Temperature</td><td>85±2℃</td></tr><tr><td>Duration</td><td>1000±24</td></tr></table> Recovery : 1～2 hrs of recovery under the standard condi- tion after the removed from test chamber		CM04RC・BU05MC	Temperature	85±2℃	Duration	1000±24				
	CM04RC・BU05MC															
Temperature	85±2℃															
Duration	1000±24															
24.Low Temperature life Test	Inductance change : Within : ±10%		Refer to individual specification.			SMD inductor : Temperature : -40±3℃ Duration : SMD inductor : 240±2hrs Recovery : At least 2 hrs of recvery under the standard condition after rhe removal from test chamber, followed by the measurement within 24 hrs. Commom mode choke coil : <table><tr><td></td><td>CM04RC・BU05MC</td></tr><tr><td>Temperature</td><td>-40±3℃</td></tr><tr><td>Duration</td><td>1000±24</td></tr></table> Recovery : 1～2 hrs of recovery under the standard condi- tion after the removed from test chamber		CM04RC・BU05MC	Temperature	-40±3℃	Duration	1000±24				
	CM04RC・BU05MC															
Temperature	-40±3℃															
Duration	1000±24															

PRECAUTIONS

SMD Inductors, CM04RC, BU05MC

Stages	Precautions	Technical considerations
1.Circuit Design	Operating environment, 1.The products described in this specification are intended for use in general electronic equipment,(office supply equipment, telecommunications systems, measuring equipment, and household equipment). They are not intended for use in mission-critical equipment or systems requiring special quality and high reliability (traffic systems, safety equipment, aerospace systems, nuclear control systems and medical equipment including life-support systems,) where product failure might result in loss of life, injury or damage. For such uses, contact TAIYO YUDEN Sales Department in advance.	
2.PCB Design	Land pattern design 1.Please contact any of our offices for a land pattern, and refer to a recommended land pattern of specifications.	
3.Considerations for automatic placement	Adjustment of mounting machine 1.Excessive impact load should not be imposed on the products when mounting onto the PC boards. 2.Mounting and soldering conditions should be checked beforehand.	1. When installing products, care should be taken not to apply distortion stress as it may deform the products.
4.Soldering	Reflow soldering 1.Please contact any of our offices for a reflow soldering, and refer to the recommended condition specified. 2.This products is reflow soldering only. 3.SMD Inductors Please do not add any stress to a product until it returns in normal temperature after reflow soldering. Lead free soldering 1.When using products with lead free soldering, we request to use them after confirming of adhesion, temperature of resistance to soldering heat, soldering etc sufficiently. Recommended conditions for using a soldering iron: Put the soldering iron on the land-pattern. Soldering iron's temperature - Below 350 °C Duration - 3 seconds or less The soldering iron should not directly touch the inductor.	1.If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products.
5.Cleaning	Cleaning conditions 1.SMD Inductors Please contact any of our offices for a cleaning,	
6.Handling	Handling 1.Keep the product away from all magnets and magnetic objects. Breakaway PC boards (splitting along perforations) 1.When splitting the PC board after mounting product, care should be taken not to give any stresses of deflection or twisting to the board. 2.Board separation should not be done manually, but by using the appropriate devices. Mechanical considerations 1.Please do not give the product any excessive mechanical shocks. 2.SMD Inductors Please do not add any shock and power to a product in transportation. Pick-up pressure 1.SMD Inductors Please do not push to add any pressure to a winding part. Please do not give any shock and push into a ferrite core exposure part. Packing 1.SMD Inductors Please avoid accumulation of a packing box as much as possible.	1.There is a case that a characteristic varies with magnetic influence. 1.Planning pattern configurations and the position of products should be carefully performed to minimize stress. 1.There is a case to be damaged by a mechanical shock. 2.SMD Inductors There is a case to be broken by the handling in transportation. 1.SMD Inductors Damage and a characteristic can vary with an excessive shock or stress. 1.There is a case that transformation and a product of tape are damaged by accumulation of a packing box.
7.Storage conditions	Storage 1.To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.. • Recommended conditions Ambient temperature 0~40°C Humidity Below 70% RH The ambient temperature must be kept below 30°C. Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. For this reason, product should be used within one year from the time of delivery. In case of storage over 6 months, solderability shall be checked before actual usage.	1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place.