



13		12	11		10		9	
CKT. SIZE	PART NUMBER	ENG. NUMBER SDA-70204-	DIM. "A"		DIM. "B"		DIM. "C"	
			MM	IN.	MM	IN.	MM	IN.
08	25-02-6008	0259	7,62	.300	17,78	.700	20,32	.800
10	25-02-6010	0260	10,16	.400	20,32	.800	22,86	.900
12	25-02-6012	0261	12,70	.500	22,86	.900	25,40	1,000
14	25-02-6014	0262	15,24	.600	25,40	1,000	27,94	1,100
16	25-02-6016	0263	17,78	.700	27,94	1,100	30,48	1,200
18	25-02-6018	0264	20,32	.800	30,48	1,200	33,02	1,300
20	25-02-6020	0265	22,86	.900	33,02	1,300	35,56	1,400
22	25-02-6022	0266	25,40	1,000	35,56	1,400	38,10	1,500
24	25-02-6024	0267	27,94	1,100	38,10	1,500	40,64	1,600
26	25-02-6026	0268	30,48	1,200	40,64	1,600	43,10	1,700
28	25-02-6028	0269	33,02	1,300	43,10	1,700	45,72	1,800
30	25-02-6030	0270	35,56	1,400	45,72	1,800	48,26	1,900
32	25-02-6032	0271	38,10	1,500	48,26	1,900	50,80	2,000
34	25-02-6034	0272	40,64	1,600	50,80	2,000	53,34	2,100
36	25-02-6036	0273	43,10	1,700	53,34	2,100	55,88	2,200
38	25-02-6038	0274	45,72	1,800	55,88	2,200	58,42	2,300
40	25-02-6040	0275	48,26	1,900	58,42	2,300	60,96	2,400


8		7	6		5		4	
CKT. SIZE	PART NUMBER	ENG. NUMBER SDA-70204-	DIM. "A"		DIM. "B"		DIM. "C"	
			MM	IN.	MM	IN.	MM	IN.
42	25-02-6042	0276	50,80	2.000	60,96	2.400	63,50	2.500
44	25-02-6044	0277	53,34	2.100	63,50	2.500	66,04	2.600
46	25-02-6046	0278	55,88	2.200	66,04	2.600	68,58	2.700
48	25-02-6048	0279	58,42	2.300	68,58	2.700	71,12	2.800
50	25-02-6050	0280	60,96	2.400	71,12	2.800	73,66	2.900
52	25-02-6052	0281	63,50	2.500	73,66	2.900	76,20	3.000
54	25-02-6054	0282	66,04	2.600	76,20	3.000	78,74	3.100
56	25-02-6056	0283	68,58	2.700	78,74	3.100	81,28	3.200
58	25-02-6058	0284	71,12	2.800	81,28	3.200	83,82	3.300
60	25-02-6060	0285	73,66	2.900	83,82	3.300	86,36	3.400
62	25-02-6062	0286	76,20	3.000	86,36	3.400	88,90	3.500
64	25-02-6064	0287	78,74	3.100	88,90	3.500	91,44	3.600
66	25-02-6066	0288	81,28	3.200	91,44	3.600	93,98	3.700
68	25-02-6068	0289	83,82	3.300	93,98	3.700	96,52	3.800
70	25-02-6070	0290	86,36	3.400	96,52	3.800	99,06	3.900
72	25-02-6072	0291	88,90	3.500	99,06	3.900	101,60	4.000




DETAIL "V"
SCALE = 20:1




DETAIL "S"

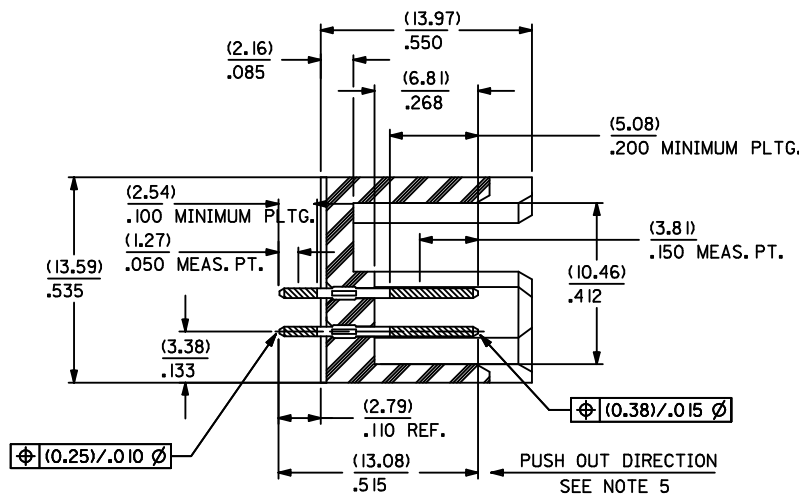

SECTION W-W

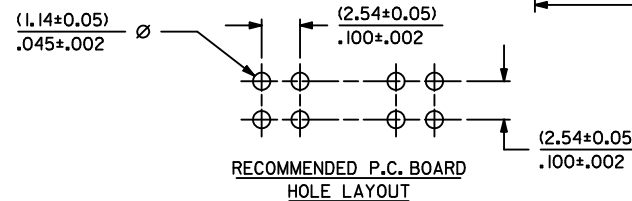

RECOMMENDED P.C. BOARD
HOLE LAYOUT

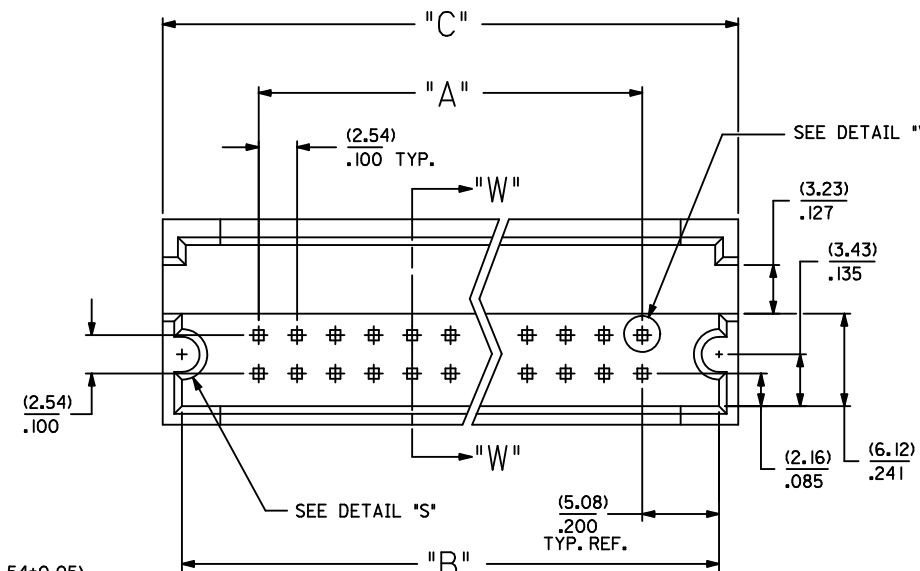

- NOTES:
1. WAFER MATERIAL: GLASS FILLED NYLON; COLOR: BLACK
 2. PIN MATERIAL: COPPER ALLOY
 3. PIN PLATING:
TIP: 15 MICROINCHES MINIMUM GOLD IN SELECTED AREA
TAIL: 75 MICROINCHES MINIMUM TIN IN SELECTED AREA
OVER NICKEL UNDERPLATE OVER-ALL
 4. PINS MUST MEET SOLDERABILITY SPEC. NO. 152
 5. PIN PUSH-OUT FORCE (1.81 KG)/4 LBS MINIMUM
 6. REFER TO P.S. NO. 70204
 7. STANDARD PACKAGING PER: PK-70873-0070

CORRECT DIMENSION EC NO: UCP2011-3892 DRAWN BY: DRWINMS BARRA CHKD: APPR: MILLER REV: H	DESCRIPTION 2011/06/09 2011/07/07	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY JAS	DATE 1986/05/20	TITLE SHROUDED HEADER DUAL ROW W/PCB SLOTS & GUIDE EARS .100 GRID .025 SQ PIN MOLEX INCORPORATED	
			4 PLACES	± ---	± ---	CHECKED BY EIK	DATE 1986/05/20		
			3 PLACES	± ---	± .010	APPROVED BY WAZ	DATE 1986/05/20		
			2 PLACES	± .025	± ---	MATERIAL NO. SEE TABLE	DOCUMENT NO. SDA-70204-0257-0320		
			1 PLACE	± ---	± ---	SHEET NO. 1 OF 1			
			ANGULAR ±1/2°						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						