

F97 Series



Resin-Molded Chip, Improved Reliability J-Lead



FEATURES

- Compliant to the RoHS directive (2002/95/EC).
- Compliant to AEC-Q200.
- Improved reliability - FR=0.5%/1000hrs (twice better than standard)
- SMD J-lead


APPLICATIONS

- Automotive electronics(Engine ECU)
- Industrial equipment


CASE DIMENSIONS: millimeters (inches)

Code	L	W ₁	W ₂	H	S
A	3.20 ± 0.20 (0.126 ± 0.008)	1.60 ± 0.20 (0.063 ± 0.008)	1.20 ± 0.10 (0.047 ± 0.004)	1.60 ± 0.20 (0.063 ± 0.008)	0.80 ± 0.20 (0.031 ± 0.008)
B	3.50 ± 0.20 (0.126 ± 0.008)	2.80 ± 0.20 (0.110 ± 0.008)	2.20 ± 0.10 (0.087 ± 0.004)	1.90 ± 0.20 (0.075 ± 0.008)	0.80 ± 0.20 (0.031 ± 0.008)
C	6.00 ± 0.20 (0.236 ± 0.008)	3.20 ± 0.20 (0.126 ± 0.008)	2.20 ± 0.10 (0.087 ± 0.004)	2.50 ± 0.20 (0.098 ± 0.008)	1.30 ± 0.20 (0.051 ± 0.008)
N	7.30 ± 0.20 (0.287 ± 0.008)	4.30 ± 0.20 (0.169 ± 0.008)	2.40 ± 0.10 (0.094 ± 0.004)	2.80 ± 0.20 (0.110 ± 0.008)	1.30 ± 0.20 (0.051 ± 0.008)


A, B CASE:



C, N CASE:



MARKING

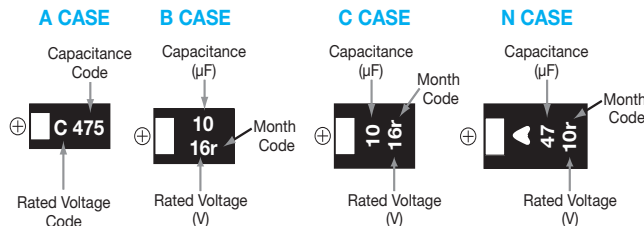

HOW TO ORDER

F97	1C	335	M	A	
Type	Rated Voltage	Capacitance Code	Tolerance	Case Size	Packaging
		pF code: 1st two digits represent the significant figures, 3rd digit represents multiplier (number of zeros to follow)	M = ±20%	See table above	See page 164 for details

TECHNICAL SPECIFICATIONS

Item	Performance Characteristics
Category Temperature Range	-55 to +125°C (Rated temperature: +85°C)
Capacitance Tolerance	±20%, ±10% (at 120Hz)
Dissipation Factor	Refer to next page
ESR (100kHz)	Refer to next page
Leakage Current	• After 1 minute's application of rated voltage, leakage current at 20°C is not more than 0.01CV or 0.5µA, whichever is greater. • After 1 minute's application of rated voltage, leakage current at 85°C is not more than 0.1CV or 5µA, whichever is greater. • After 1 minute's application of derated voltage, leakage current at 125°C is not more than 0.125CV or 6.3µA, whichever is greater.
Capacitance Change by Temperature	+15% Max. (at +125°C) +10% Max. (at +85°C) -10% Max. (at -55°C)
Damp Heat (Steady State)	At 85°C, 85% R.H., For 1000 hours (No voltage applied) Capacitance Change Within ±10% of the initial value Dissipation Factor Initial specified value or less Leakage Current 125% or less than the initial specified value
Load Humidity	After 1000 hour's application of rated voltage in series with a 33Ω resistor at 85°C, 85% R.H., capacitors meet the characteristics requirements table below. Capacitance Change Within ±10% of the initial value Dissipation Factor 120% or less than the initial specified value Leakage Current 200% or less than the initial specified value
Temperature Cycles	At -55°C / +125°C, For 30 minutes each, 1000 cycles Capacitance Change Within ± 5% of the initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Resistance to Soldering Heat	10 seconds reflow at 260°C, 5 seconds immersion at 260°C. Capacitance Change Within ± 5% of the initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Solderability	After immersing capacitors completely into a solder pot at 245°C for 2 to 3 seconds, more than 3/4 of their electrode area shall remain covered with new solder.
Surge	After application of surge voltage in series with a 33Ω resistor at the rate of 30 seconds ON, 30 seconds OFF, for 1000 successive test cycles at 85°C, capacitors shall meet the characteristic requirements table below. Capacitance Change Within ± 5% of the initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Endurance	After 2000 hours' application of rated voltage in series with a 3Ω resistor at 85°C, or derated voltage in series with a 3Ω resistor at 125°C, capacitors shall meet the characteristic requirements table below. Capacitance Change Within ±10% of the initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Shear Test	After applying the pressure load of 5N for 10 ±1 seconds horizontally to the center of capacitor side body which has no electrode and has been soldered beforehand on a substrate, there shall be found neither exfoliation nor its sign at the terminal electrode.
Terminal Strength	Keeping a capacitor surface-mounted on a substrate upside down and supporting the substrate at both of the opposite bottom points 45mm apart from the center of capacitor, the pressure strength is applied with a specified jig at the center of the substrate so that substrate may bend by 1mm as illustrated. Then, there shall be found no remarkable abnormality on the capacitor terminals.
Failure Rate	0.5% per 1000 hours at 85°C, VR with 0.1 / V series impedance, 60% confidence level.



F97 Series



Resin-Molded Chip, Improved Reliability J-Lead

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated Voltage					
μF	Code	6.3V (0J)	10V (1A)	16V (1C)	20V (1D)	25V (1E)	35V (1V)
0.47	474						A
0.68	684				A	A	A
1	105			A	A	A	A*
1.5	155			A	A		A*/B
2.2	225		A	A	A	A*/B	B
3.3	335	A	A	A	B	B	B*/C
4.7	475	A	A/B	A/B	A/B	B*/C	C
6.8	685	A/B	B	B	B*/C	C	C*/N
10	106		A/B	A/B/C	B*/C	C/N	N
15	156	B	B	B*/C	N	C*/N	
22	226	A/B	A/B	B/C/N	C/N	N*	
33	336	A/C	B/C/N	B/C/N		N*	
47	476	B/C	B*/C/N	C/N			
68	686	N	N				
100	107	N	C/N*				

Available Ratings

*Codes under development – subject to change

Please contact to your local AVX sales office when these series are being designed in your application.

F97 Series



Resin-Molded Chip, Improved Reliability J-Lead

RATINGS & PART NUMBER REFERENCE

AVX Part Number	Case Size	Cap (µF)	Rated Voltage (V)	Leakage Current (µA)	Dissipation Factor (%@120Hz)	ESR (Ω@100kHz)
6.3 Volt						
F970J335MAA	A	3.3	6.3	0.5	4	4.5
F970J475MAA	A	4.7	6.3	0.5	6	4.0
F970J685MAA	A	6.8	6.3	0.5	6	3.5
F970J685MBA	B	6.8	6.3	0.5	6	2.5
F970J156MBA	B	15	6.3	0.9	6	2.0
F970J226MAA	A	22	6.3	1.4	12	2.5
F970J226MBA	B	22	6.3	1.4	8	1.9
F970J336MAA	A	33	6.3	2.1	12	2.5
F970J336MCC	C	33	6.3	2.1	6	1.1
F970J476MBA	B	47	6.3	3.0	8	1.0
F970J476MCC	C	47	6.3	3.0	6	0.9
F970J686MNC	N	68	6.3	4.3	6	0.6
F970J107MNC	N	100	6.3	6.3	8	0.6
10 Volt						
F971A225MAA	A	2.2	10	0.5	4	5.0
F971A335MAA	A	3.3	10	0.5	4	4.5
F971A475MAA	A	4.7	10	0.5	6	4.0
F971A475MBA	B	4.7	10	0.5	6	2.8
F971A685MBA	B	6.8	10	0.7	6	2.5
F971A106MAA	A	10	10	1.0	6	3.0
F971A106MBA	B	10	10	1.0	6	2.0
F971A156MBA	B	15	10	1.5	6	2.0
F971A226MAA	A	22	10	2.2	15	3.0
F971A226MBA	B	22	10	2.2	8	1.9
F971A336MBA	B	33	10	3.3	8	1.9
F971A336MCC	C	33	10	3.3	6	1.1
F971A336MNC	N	33	10	3.3	6	0.7
F971A476MCC	C	47	10	4.7	8	0.9
F971A476MNC	N	47	10	4.7	6	0.7
F971A686MNC	N	68	10	6.8	6	0.6
F971A107MCC	C	100	10	10.0	10	0.7
16 Volt						
F971C105MAA	A	1	16	0.5	4	7.5
F971C155MAA	A	1.5	16	0.5	4	6.3
F971C225MAA	A	2.2	16	0.5	4	5.0
F971C335MAA	A	3.3	16	0.5	4	4.5
F971C475MAA	A	4.7	16	0.8	8	4.0
F971C475MBA	B	4.7	16	0.8	6	2.8
F971C685MBA	B	6.8	16	1.1	6	2.5
F971C106MAA	A	10	16	1.6	8	3.5
F971C106MBA	B	10	16	1.6	6	2.1

AVX Part Number	Case Size	Cap (µF)	Rated Voltage (V)	Leakage Current (µA)	Dissipation Factor (%@120Hz)	ESR (Ω@100kHz)
16 Volt						
F971C106MCC	C	10	16	1.6	6	1.5
F971C156MCC	C	15	16	2.4	6	1.2
F971C226MBA	B	22	16	3.5	8	1.9
F971C226MCC	C	22	16	3.5	8	1.1
F971C226MNC	N	22	16	3.5	6	0.7
F971C336MBA	B	33	16	5.3	10	2.1
F971C336MCC	C	33	16	5.3	8	1.1
F971C336MNC	N	33	16	5.3	6	0.7
F971C476MCC	C	47	16	7.5	10	1.1
F971C476MNC	N	47	16	7.5	8	0.7
20 Volt						
F971D684MAA	A	0.68	20	0.5	4	7.6
F971D105MAA	A	1	20	0.5	4	7.5
F971D155MAA	A	1.5	20	0.5	4	6.7
F971D225MAA	A	2.2	20	0.5	6	6.3
F971D335MBA	B	3.3	20	0.7	4	3.1
F971D475MAA	A	4.7	20	0.9	8	4.0
F971D475MBA	B	4.7	20	0.9	6	2.8
F971D685MCC	C	6.8	20	1.4	6	1.8
F971D106MCC	C	10	20	2.0	6	1.5
F971D156MNC	N	15	20	3.0	6	0.7
F971D226MCC	C	22	20	4.4	8	1.1
F971D226MNC	N	22	20	4.4	6	0.7
25 Volt						
F971E684MAA	A	0.68	25	0.5	4	7.6
F971E105MAA	A	1	25	0.5	4	7.5
F971E225MBA	B	2.2	25	0.6	4	3.8
F971E335MBA	B	3.3	25	0.8	4	3.5
F971E475MCC	C	4.7	25	1.2	6	1.8
F971E685MCC	C	6.8	25	1.7	6	1.8
F971E106MCC	C	10	25	2.5	6	1.6
F971E106MNC	N	10	25	2.5	6	1.0
F971E156MNC	N	15	25	3.8	6	0.7
35 Volt						
F971V474MAA	A	0.47	35	0.5	4	10.0
F971V684MAA	A	0.68	35	0.5	4	7.6
F971V155MBA	B	1.5	35	0.5	4	4.0
F971V225MBA	B	2.2	35	0.8	4	3.8
F971V335MCC	C	3.3	35	1.2	4	2.0
F971V475MCC	C	4.7	35	1.6	6	1.8
F971V685MNC	N	6.8	35	2.4	6	1.0
F971V106MNC	N	10	35	3.5	6	1.0

* In case of capacitance tolerance $\pm 10\%$ type, "K" will be put at 9th digit of type numbering system

Last update: 25.11.2013



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[AVX:](#)

[F971A107MCC](#) [F971C476MCC](#)