
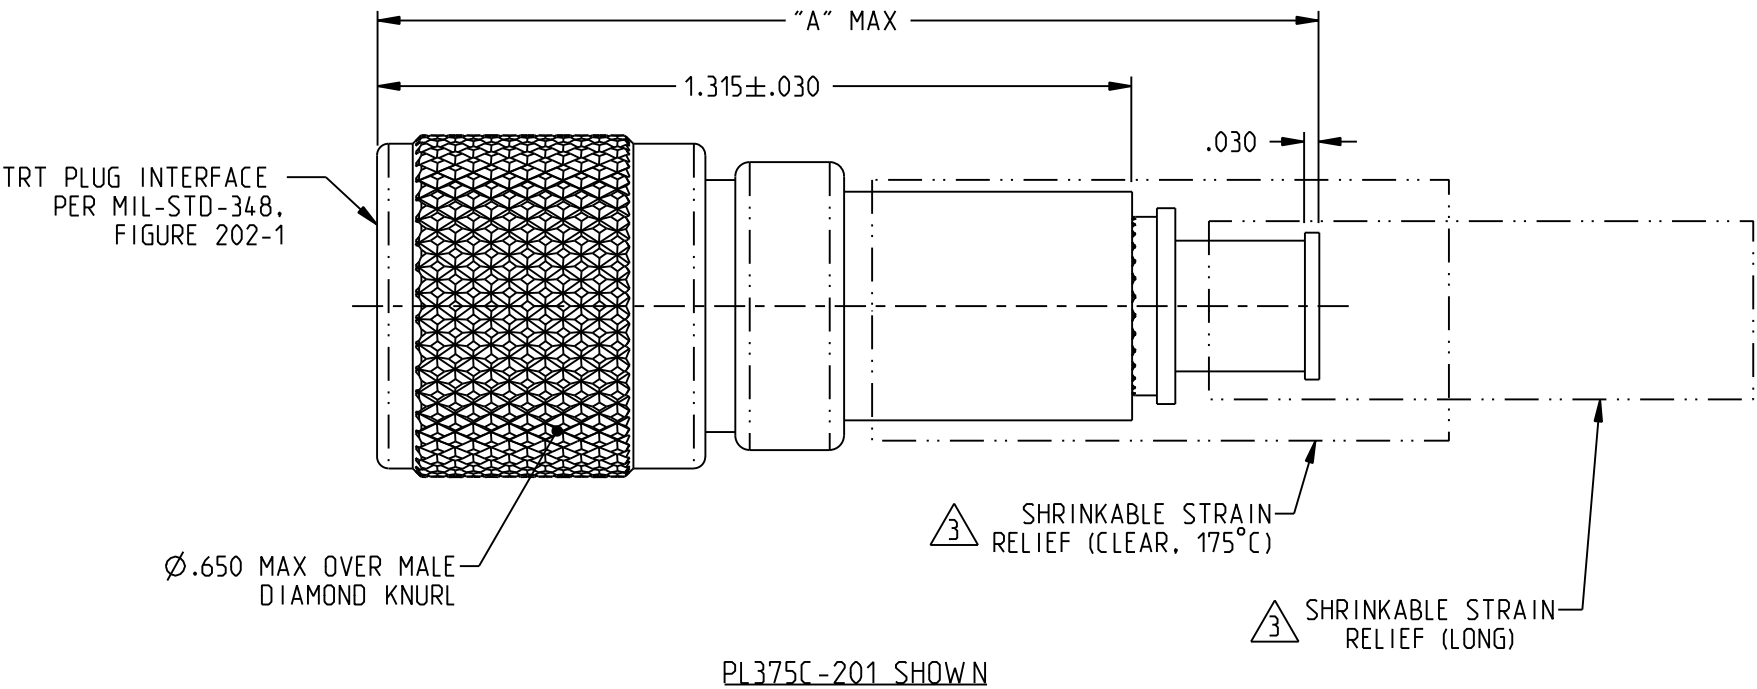


MODEL NUMBER	CABLES ACCOMMODATED	ASSEMBLE PER	"A" MAX	
PL375C-201	M17/176-00002	TAI-166	1.72	
PL375C-202	TWC-78-1			
PL375C-203	TWC-124-1A			
PL375C-204	10602, RAYCHEM			
PL375C-205	TWAC-78-1F2			
PL375C-206	7826D0130, RAYCHEM			
PL375C-207	83310, BELDEN			
PL375C-208	202-3927, MICRODOT			
PL375C-209	202-3942, MICRODOT			
PL375C-210	8451, BELDEN			
PL375C-211	202-3934, MICRODOT	TAI-138	1.46	
PL375C-212	2524E0114, RAYCHEM			
PL375C-213	TWC-78-2			
PL375C-213-1U	TWC-78-2			
PL375C-214	TWC-124-2			
PL375C-215	BL982, TIMES			
PL375C-216	BL1242, TIMES			
PL375C-217	GC875TM24H, GRUMMAN	TAI-166	1.72	
PL375C-218	EPD22188B, RAYCHEM			
PL375C-219	2526D1114, RAYCHEM			
PL375C-220	GC875RR1, GRUMMAN			
PL375C-221	10614, RAYCHEM			
PL375C-222	10613, RAYCHEM			
PL375C-223	HMS2-1149, HUGHES	TAI-138	1.46	
PL375C-224	TWCP-124-3			
PL375C-301	GC875GC1, GRUMMAN	TAI-168	1.70	
PL375C-302	GC875GB1, GRUMMAN			
PL375C-303	7528A5314, RAYCHEM			
PL375C-305	M17/177-00001, THERMATICS	TAI-218		
PL375C-306	TRC-50-2 & M17/134-00002			
PL375C-307	TRC-75-1			
PL375C-308	TRC-75-2	TAI-168		
PL375C-309	TRC-50-1			

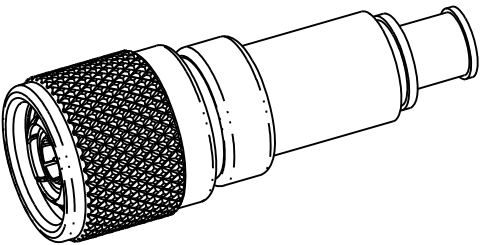

NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIAL & FINISH:

- 1.1 BODY, CRIMP BUSHING & CRIMP RING: NICKEL PLATED BRASS
- 1.2 FINGER SPRING: NICKEL PLATED BERYLLIUM COPPER
- 1.3 INSULATOR & DIELECTRIC: PTFE (TEFLON)
- 1.4 INTERMEDIATE CONTACT: GOLD PLATED BERYLLIUM COPPER
- 1.5 CENTER CONTACT: GOLD PLATED BRASS
- 1.6 GASKET: SILICONE RUBBER

2. ELECTRICAL:

- 2.1 FREQUENCY (MAX): 500 MHz
- 2.2 IMPEDANCE: NON-CONSTANT

3. ONE (1) SHRINKABLE STRAIN RELIEF AND/OR SHRINKABLE SEALING SLEEVE SUPPLIED AS FOLLOWS:

- 3.1 CABLE GROUPS -201 THROUGH -210, -217 THROUGH -303, -305 & -307:
 - 1 SHRINKABLE STRAIN RELIEF (1.00 LONG)
 - 1 SHRINKABLE SEALING SLEEVE (1.25 LONG)
- 3.2 CABLE GROUPS -211 THROUGH -216 & -308:
 - 1 SHRINKABLE STRAIN RELIEF (1.75 LONG)

4. EXAMPLE OF COMPLETE MODEL NUMBER:

PL375C -XXX
CABLE GROUP DASH NUMBER

BASE MODEL NUMBER

- 4.1. IF SAFETY WIRE TYPE IS REQUIRED ADD "S" SUFFIX TO BASE MODEL NUMBER (EXAMPLE: PL375CS-XXX).

 NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018	 3D ANGLE PROJECTION	TROMPETER	
		RoHS2 2011/65/EU	Title: TRT CABLE PLUG, TOOL CRIMP
		Model No. PL375C-XXX/PL375CS-XXX	Size B
		DO NOT SCALE DRAWING	Date 1/26/2022 Sheet 1 OF 1