




The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

7914 4 mm SMD & Through-hole Sealed Key Switch

BOURNS®

Packaging Specifications


7914J

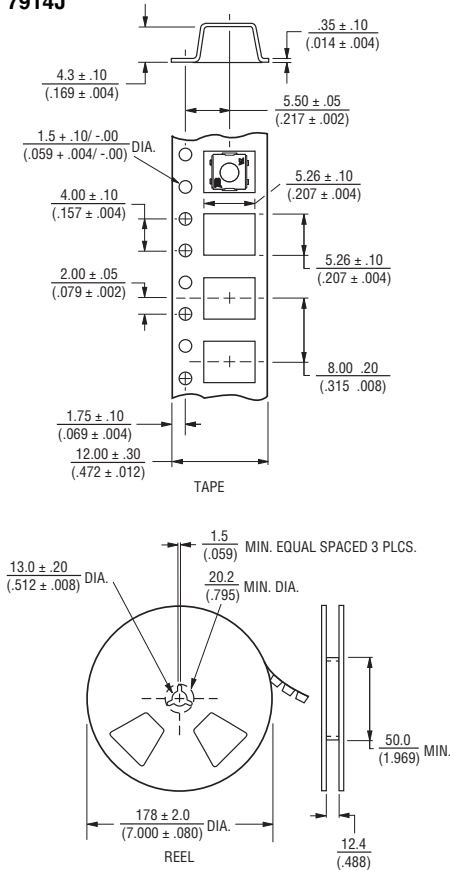

Meets EIA specification 481.

500 pcs./reel

7914J/G

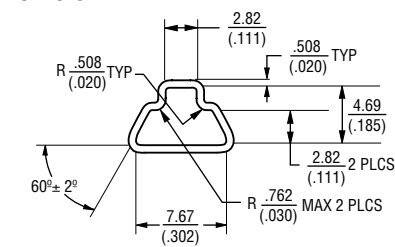


50 pcs./tube

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

REV. 10/13

Specifications are subject to change without notice. The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.


7914G

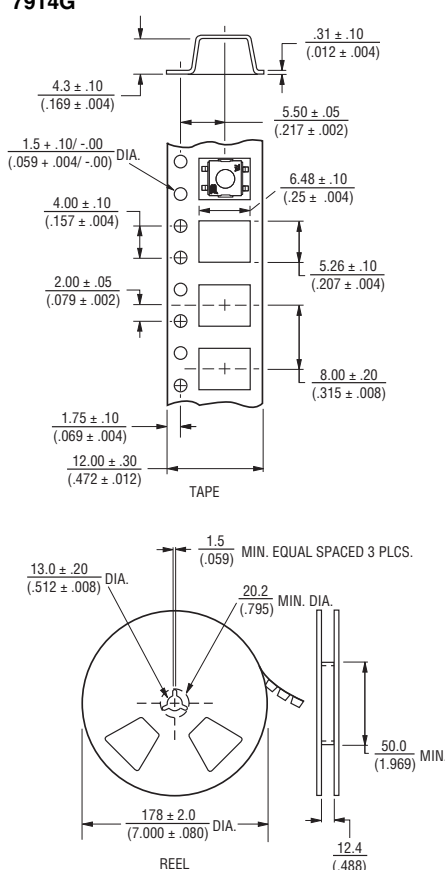

Meets EIA specification 481.


500 pcs./reel

7914H

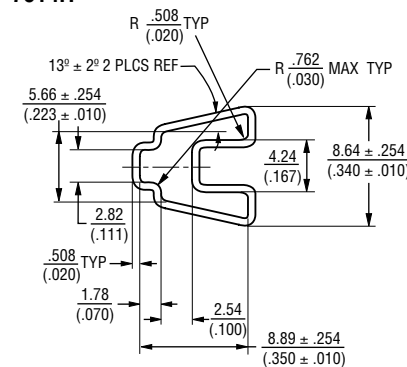

50 pcs./tube

7914S

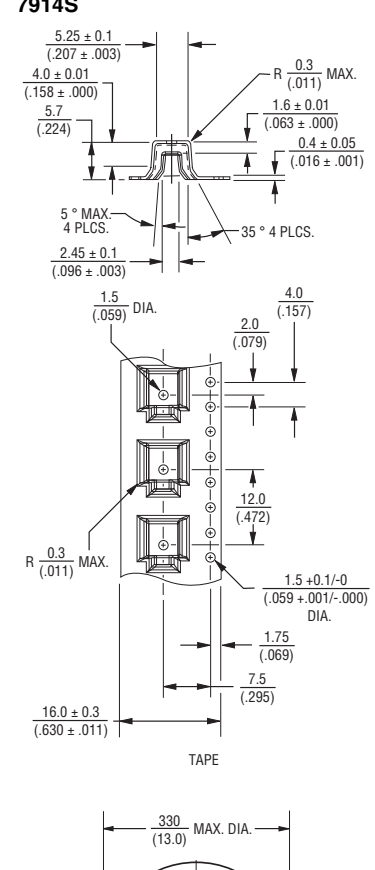

Meets EIA specification 481.

200 pcs./reel

Reflow Soldering Profile

