


Extremely solid

M

Stroke 10 – 18 mm. Weight: 81,0 g

Relative ED (Percent)	100	50	25	10
Max. Performance (Watt)	7	14	28	70
Max. ED (Seconds)	∞	230	25	6

Checklist (PDF, 390 kB)

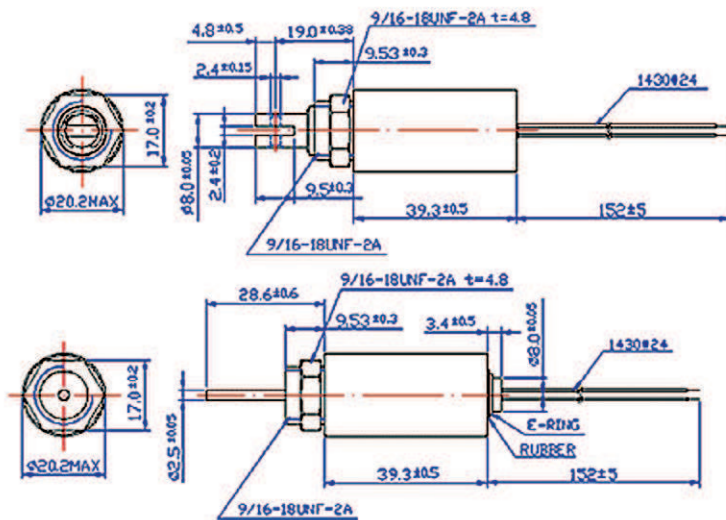

The graph shows the average number of nodes in the network (Y-axis, 0 to 18) versus the number of nodes in the network (X-axis, 1 to 10). Four data series are plotted, representing different power levels and duty cycles:

- 7W Duty100% (Orange line):** Starts at 16.0 for 1 node and decreases to approximately 6.5 for 10 nodes.
- 14W Duty50% (Green line):** Starts at 6.0 for 1 node and increases to approximately 16.0 for 10 nodes.
- 28W Duty25% (Red line):** Starts at 9.0 for 1 node and decreases to approximately 1.8 for 10 nodes.
- 70W Duty10% (Blue line):** Starts at 11.5 for 1 node and decreases to approximately 3.2 for 10 nodes.

Number of nodes in the network	7W Duty100%	14W Duty50%	28W Duty25%	70W Duty10%
1	16.0	6.0	9.0	11.5
2	14.0	4.0	6.5	9.5
3	12.0	8.0	5.0	7.5
4	11.0	10.0	4.0	6.5
5	10.0	12.0	3.5	5.5
6	8.5	14.0	3.0	4.8
7	7.5	16.0	2.5	4.0
8	7.0	-	2.2	3.8
9	6.8	-	2.0	3.5
10	6.5	-	1.8	3.2



Contact:
Phone: 0049-(0)8161-9913-0
Fax: 0049-(0)8161-9913-20
E-Mail: service@red-magnetics.com
Info: www.red-magnetics.com