THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

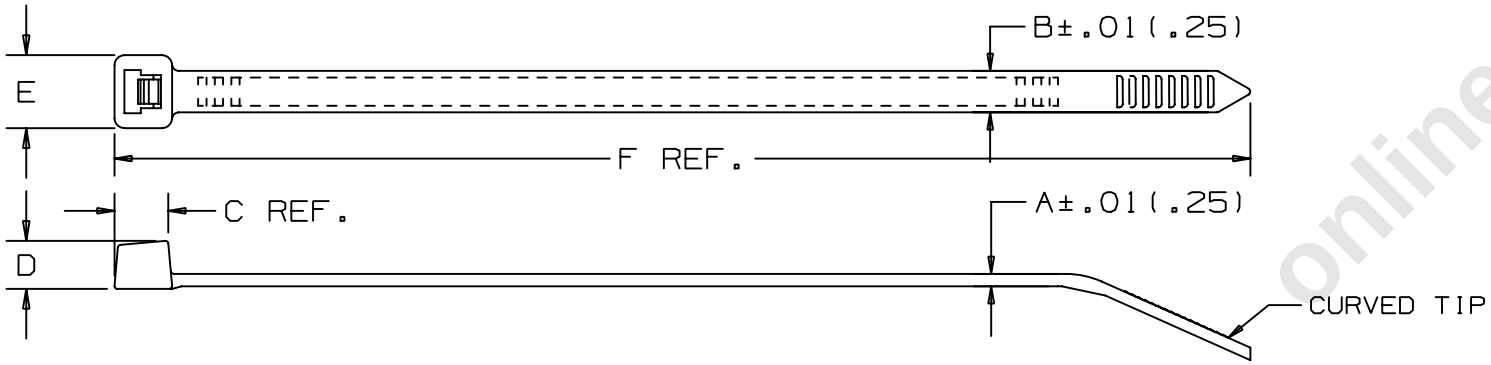

PANDUIT * PART NO.	BUNDLE DIA. MIN. in (mm)	BUNDLE DIA. MAX. in (mm)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT lbs. (g) /100 pcs.
PLT1M	.06 (1.5)	.87 (22)	.043 (1.1)	.098 (2.5)	.169 (4.3)	.154 (3.9)	.180 (4.6)	3.9 (99)	18 (80)	MINIATURE	.07 (32)
PLT2I	.06 (1.5)	2.00 (51)	.045 (1.1)	.142 (3.6)	.206 (5.2)	.180 (4.6)	.240 (6.1)	8.0 (203)	40 (178)	INTERMEDIATE	.20 (91)
PLT2S	.06 (1.5)	1.88 (48)	.052 (1.3)	.190 (4.8)	.258 (6.6)	.220 (5.6)	.316 (8.0)	7.4 (188)	50 (222)	STANDARD	.29 (132)
PLT3S	.06 (1.5)	3.00 (76)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	11.5 (292)	50 (222)	STANDARD	.45 (204)

NOTES:

* 1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE. SEE NOTE 2 FOR PART NUMBER SUFFIX FOR PART COLOR.

2. CABLE TIES ARE AVAILABLE IN 4 DIFFERENT FLUORESCENT COLORS:

PART NUMBER SUFFIX	COLOR
-53	ORANGE
-54	YELLOW
-55	GREEN
-59	PINK

SS_26476_05.PRT

CAD FILENAME/LAYERS

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

PANDUIT CORP. TINLEY PARK, ILLINOIS

PAN-TY FLUORESCENT LOCKING CABLE TIE

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±
(.XX) ± ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY C.HARVELL

MAT'L: NYLON 6.6

SCALE NONE

DATE 11/08/91

CHK'D HVP

DRAWING NO. SS-26476

DWG A SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP
5	9/10/04	ERW	JVL	CORRECTED METRIC CONVERSIONS	26476 5	JVL	

onlinecomp