

CIRCULAR POWER CONNECTORS



✓ Active

TE CONNECTIVITY (TE)

LGH-3,LEAD ASSY,36 INCH,YELLOW

LGH | LGH , LKH

1-869084-2

TE Internal Number: 1-869084-2

EU RoHS Compliant with Exemptions

EU ELV Compliant with Exemptions

Pigtail Length 9.65 mm [.38 in] **Product Type** Lead Assembly

Operating Voltage (VDC) 40000

Wire/Cable Size (AWG) 16


Operating Temperature Range (°C) -55 – 125

PRODUCT DRAWING

English



★ 3D PDF

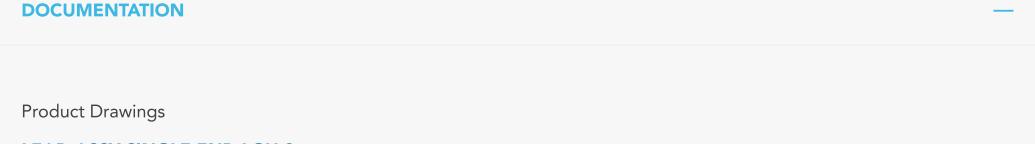

LEAD ASSY SINGLE END LGH-3

PDF

English

CAD Files

3D PDF

PDF

3D

Customer View Model

2D_DXF.ZIP

English

Customer View Model 3D_STR2IP English Product Specifications Product Specifications Standard LGH Connectors, Series 1/2I, 1/2LI, 1I, 1LI, 2I, 3I And 4I PDE English FEATURES + Places review product documents or contact as for the lottest agency approval information. Hereve Nove: Use the Product Drewing for all design socivity. Product Type Features Product Type Lead Assembly Electrical Characteristics Operating Voltage (VDC) 40000 Body Features Positive Stop Ferrule Without Termination Restures Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimonsions Plytail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (*C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10 PRODUCT COMPLIANCE	English	
Product Specifications Product Specification Standard LGH Connectors, Series 1/2I, 1/2II, 11, 1II, 2I, 3I And 4I PDF English FEATURES Please review product documents or contact us for the latest agency approvel information. Please Note: Use the Product Drawing for all design activity. Product Type Features Product Type Load Assembly Electrical Characteristics Operating Voltage (VDC) 40000 Body Features Positive Stop Ferrule Without Termination Features Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.65 mm [.38 in] Assembly Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -85 – 125 Shielded No Packaging Guantity 10	3D_STP.ZIP	
Product Specification Standard LGH Connectors, Series 1/21, 1/2L1, 11, 1L1, 21, 31 And 41 PDF English FEATURES + Please review product documents or contact us for the latest agency approval information. Please Notes: Use the Product Drawing for all design activity. Product Type Features Product Type Lead Assembly Electrical Characteristics Operating Voltage (VDC) 403000 Body Features Positive Stop Ferrule Without Termination Features Wilne/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtall Length 9.65 mm [.38 in] Assembly Length 9.65 mm [.36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10	English	
Standard LGH Connectors, Series 1/2I, 1/2LI, 1I, 1LI, 2I, 3I And 4I PDF English FEATURES + Please review product documents or contact us for the latest agency approval information. Please Note: Use the Product Drawing for all design activity. Product Type Features Product Type Lead Assembly Electrical Characteristics Operating Voltage (YDC) 40000 Body Features Positive Stop Ferrule Without Termination Features Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimonsions Pigtail Length 9:65 mm [.38 in] Assembly Length 9:14.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10	Product Specifications	
PEATURES Please review product documents or contact us for the latest agency approval information. Please Note: Use the Product Drawing for all design activity. Product Type Features Product Type Lead Assembly Electrical Characteristics Operating Voltage (VDC) 40000 Body Features Positive Stop Ferrule Without Termination Features Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.45 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10	Product Specification	
Please review product documents or contact us for the latest agency approval information. Please Note: Use the Product Drawing for all design activity. Product Type Features Product Type Lead Assembly Electrical Characteristics Operating Voltage (VDC) 40000 Body Features Positive Stop Ferrule Without Termination Features Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10	PDF	
Please Note: Use the Product Drawing for all design activity. Product Type Features Product Type Lead Assembly Electrical Characteristics Operating Voltage (VDC) 40000 Body Features Positive Stop Ferrule Without Termination Features Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10	FEATURES	+
Please Note: Use the Product Drawing for all design activity. Product Type Features Product Type Lead Assembly Electrical Characteristics Operating Voltage (VDC) 40000 Body Features Positive Stop Ferrule Without Termination Features Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10		
Product Type Features Product Type Lead Assembly Electrical Characteristics Operating Voltage (VDC) 40000 Body Features Positive Stop Ferrule Without Termination Features Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10	Please review product documents or contact us for the latest agency approval information.	
Electrical Characteristics Operating Voltage (VDC) 40000 Body Features Positive Stop Ferrule Without Termination Features Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10	Please Note: Use the Product Drawing for all design activity.	
Electrical Characteristics Operating Voltage (VDC) 40000 Body Features Positive Stop Ferrule Without Termination Features Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10	Product Type Features	
Electrical Characteristics Operating Voltage (VDC) 40000 Body Features Positive Stop Ferrule Without Termination Features Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10		
Operating Voltage (VDC) 40000 Body Features Positive Stop Ferrule Without Termination Features Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10		
Body Features Positive Stop Ferrule Without Termination Features Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10	Electrical Characteristics	
Positive Stop Ferrule Without Termination Features Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10	Operating Voltage (VDC) 40000	
Positive Stop Ferrule Without Termination Features Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10	Body Features	
Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10		
Wire/Cable Size (AWG) 16 Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10	Towns in ation Footunes	
Termination Method to Wire/Cable Pre-Terminated to Cable Dimensions Pigtail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10		
Pigtail Length 9.65 mm [.38 in] Assembly Length 914.4 mm [36 in] Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10		
Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10	Dimensions	
Usage Conditions Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10	Pigtail Length 9.65 mm [.38 in]	
Operating Temperature Range (°C) -55 – 125 Shielded No Packaging Features Packaging Quantity 10		
Packaging Features Packaging Quantity 10	Usage Conditions	
Packaging Features Packaging Quantity 10	Operating Temperature Range (°C) -55 – 125	
Packaging Quantity 10	Shielded No	
	Packaging Features	
PRODUCT COMPLIANCE +	Packaging Quantity 10	
	PRODUCT COMPLIANCE	+

Customer View Model

3D_IGS.ZIP

Statement of Compliance

Statement of Compliance

PDF