
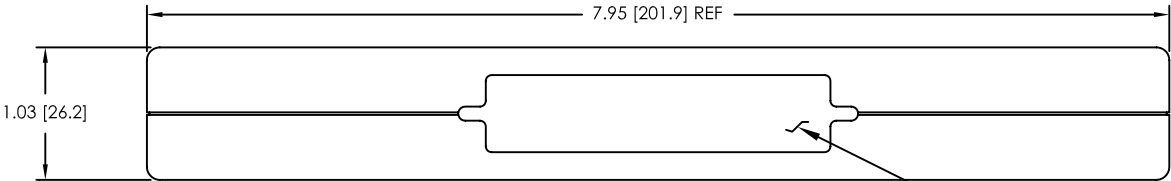


8 7 6 5 4 3 2 1


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
-	APPROVED FOR PRODUCTION BY AEM	8/31/98	
A	REDRAWN	11/15/07	D.FRIEDELLO


WIRING DIAGRAM

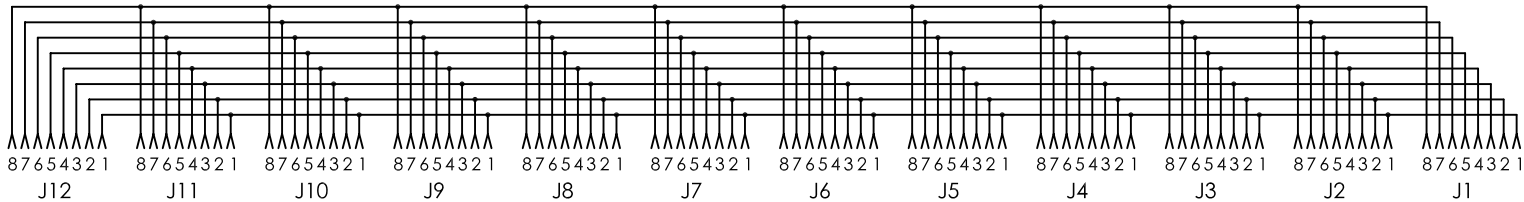

REAR VIEW

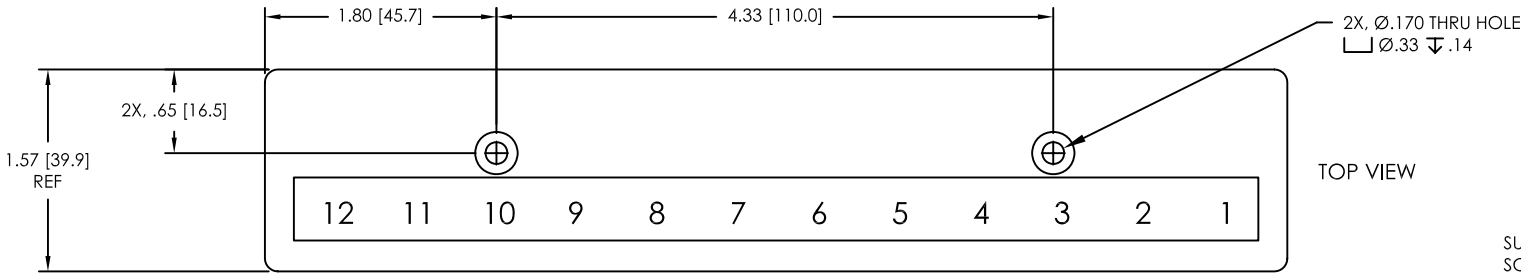

TOP VIEW

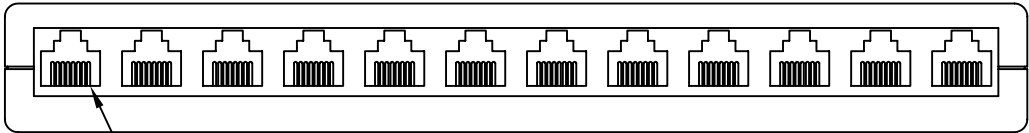

FRONT VIEW

12X, RJ45, 8 PIN JACKS
HOUSING IS GRAY ABS PLASTIC

MOUNTING OPTIONS

SUPPLIED WITH TWO 1.25" WOOD
SCREWS AND TWO 1.1" X 2.75"
STRIPS OD DOUBLE SIDED TAPE.

DIMENSIONS ARE IN INCHES [mm] UNLESS OTHERWISE SPECIFIED. TOLERANCES TO BE: XX ±.02 [1.51] XXX ±.005 [1.13] OVERALL CABLE LENGTH TOL: ≤ 60 [1524] +3 [76.2] / -0 > 60 [1524] +5% / -5%		APPROVALS		DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
DRAWN BY D.FRIEDELLO		11/15/07		CATEGORY		MODULAR	
CHECKED BY J.FRIEDELLO		11/15/07		PRODUCT DESCRIPTION		12-POSITION RJ45 BRIDGE ADPTR	
APPROVED BY D.PARHAM		11/15/07		SIE	SCM NO.	DWG. NO.	REV.
B		43321		TDS2167		A	
SCALE: 1/1		CAD FILE: TDS2167.DWG		SHEET 1 OF 1			