

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CH	11		0	RELEASED	26/AUG/97	DAP	-
			A	EC 0B20-0270-98	19/FEB/98	RNP	RAR
			B	EC 0B20-1083-98	20/AUG/98	RNP	RAR



1. MATES WITH MATE-N-LOK II PLUG CONNECTOR
USING P/N 194211-1 OR 194213-1 SOCKET CONTACTS.
2. ALL DIMENSIONS ARE REFERENCE ONLY EXCEPT P.C. LAYOUT.
3. PIN CONTACTS ARE LUBRICATED.

D

C

B

A

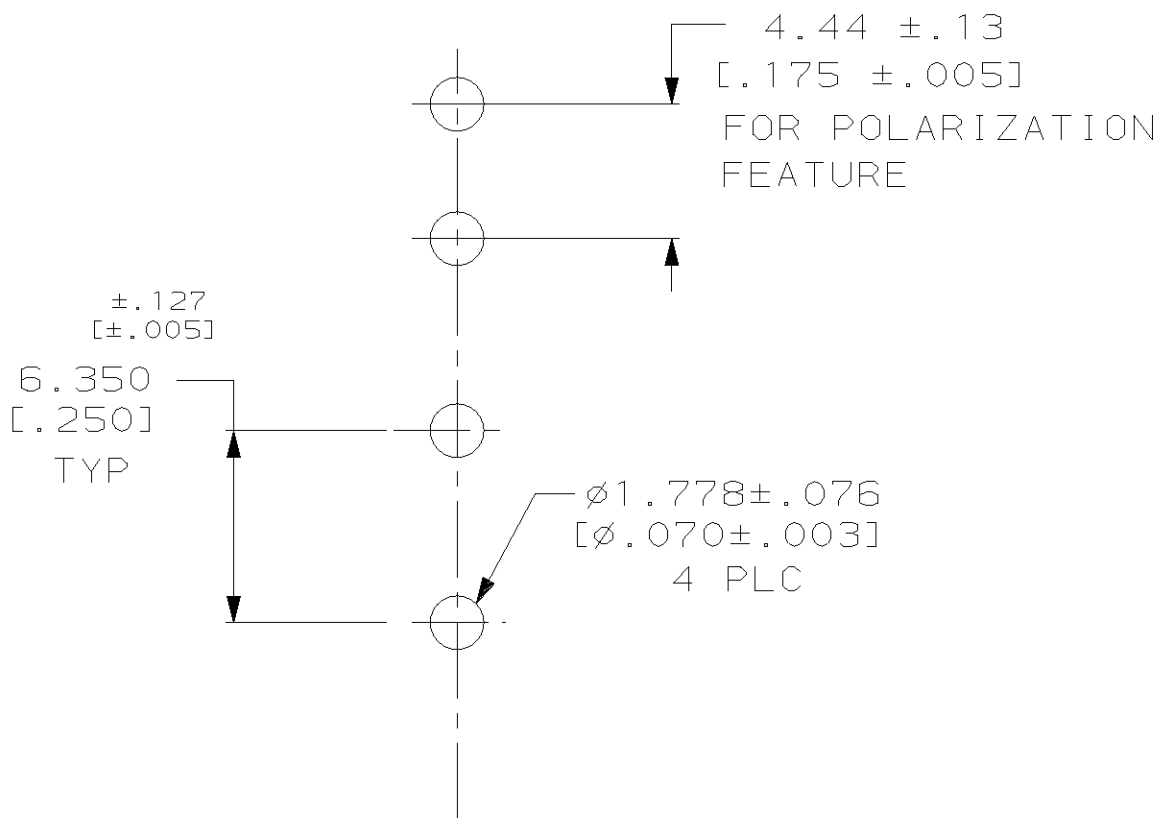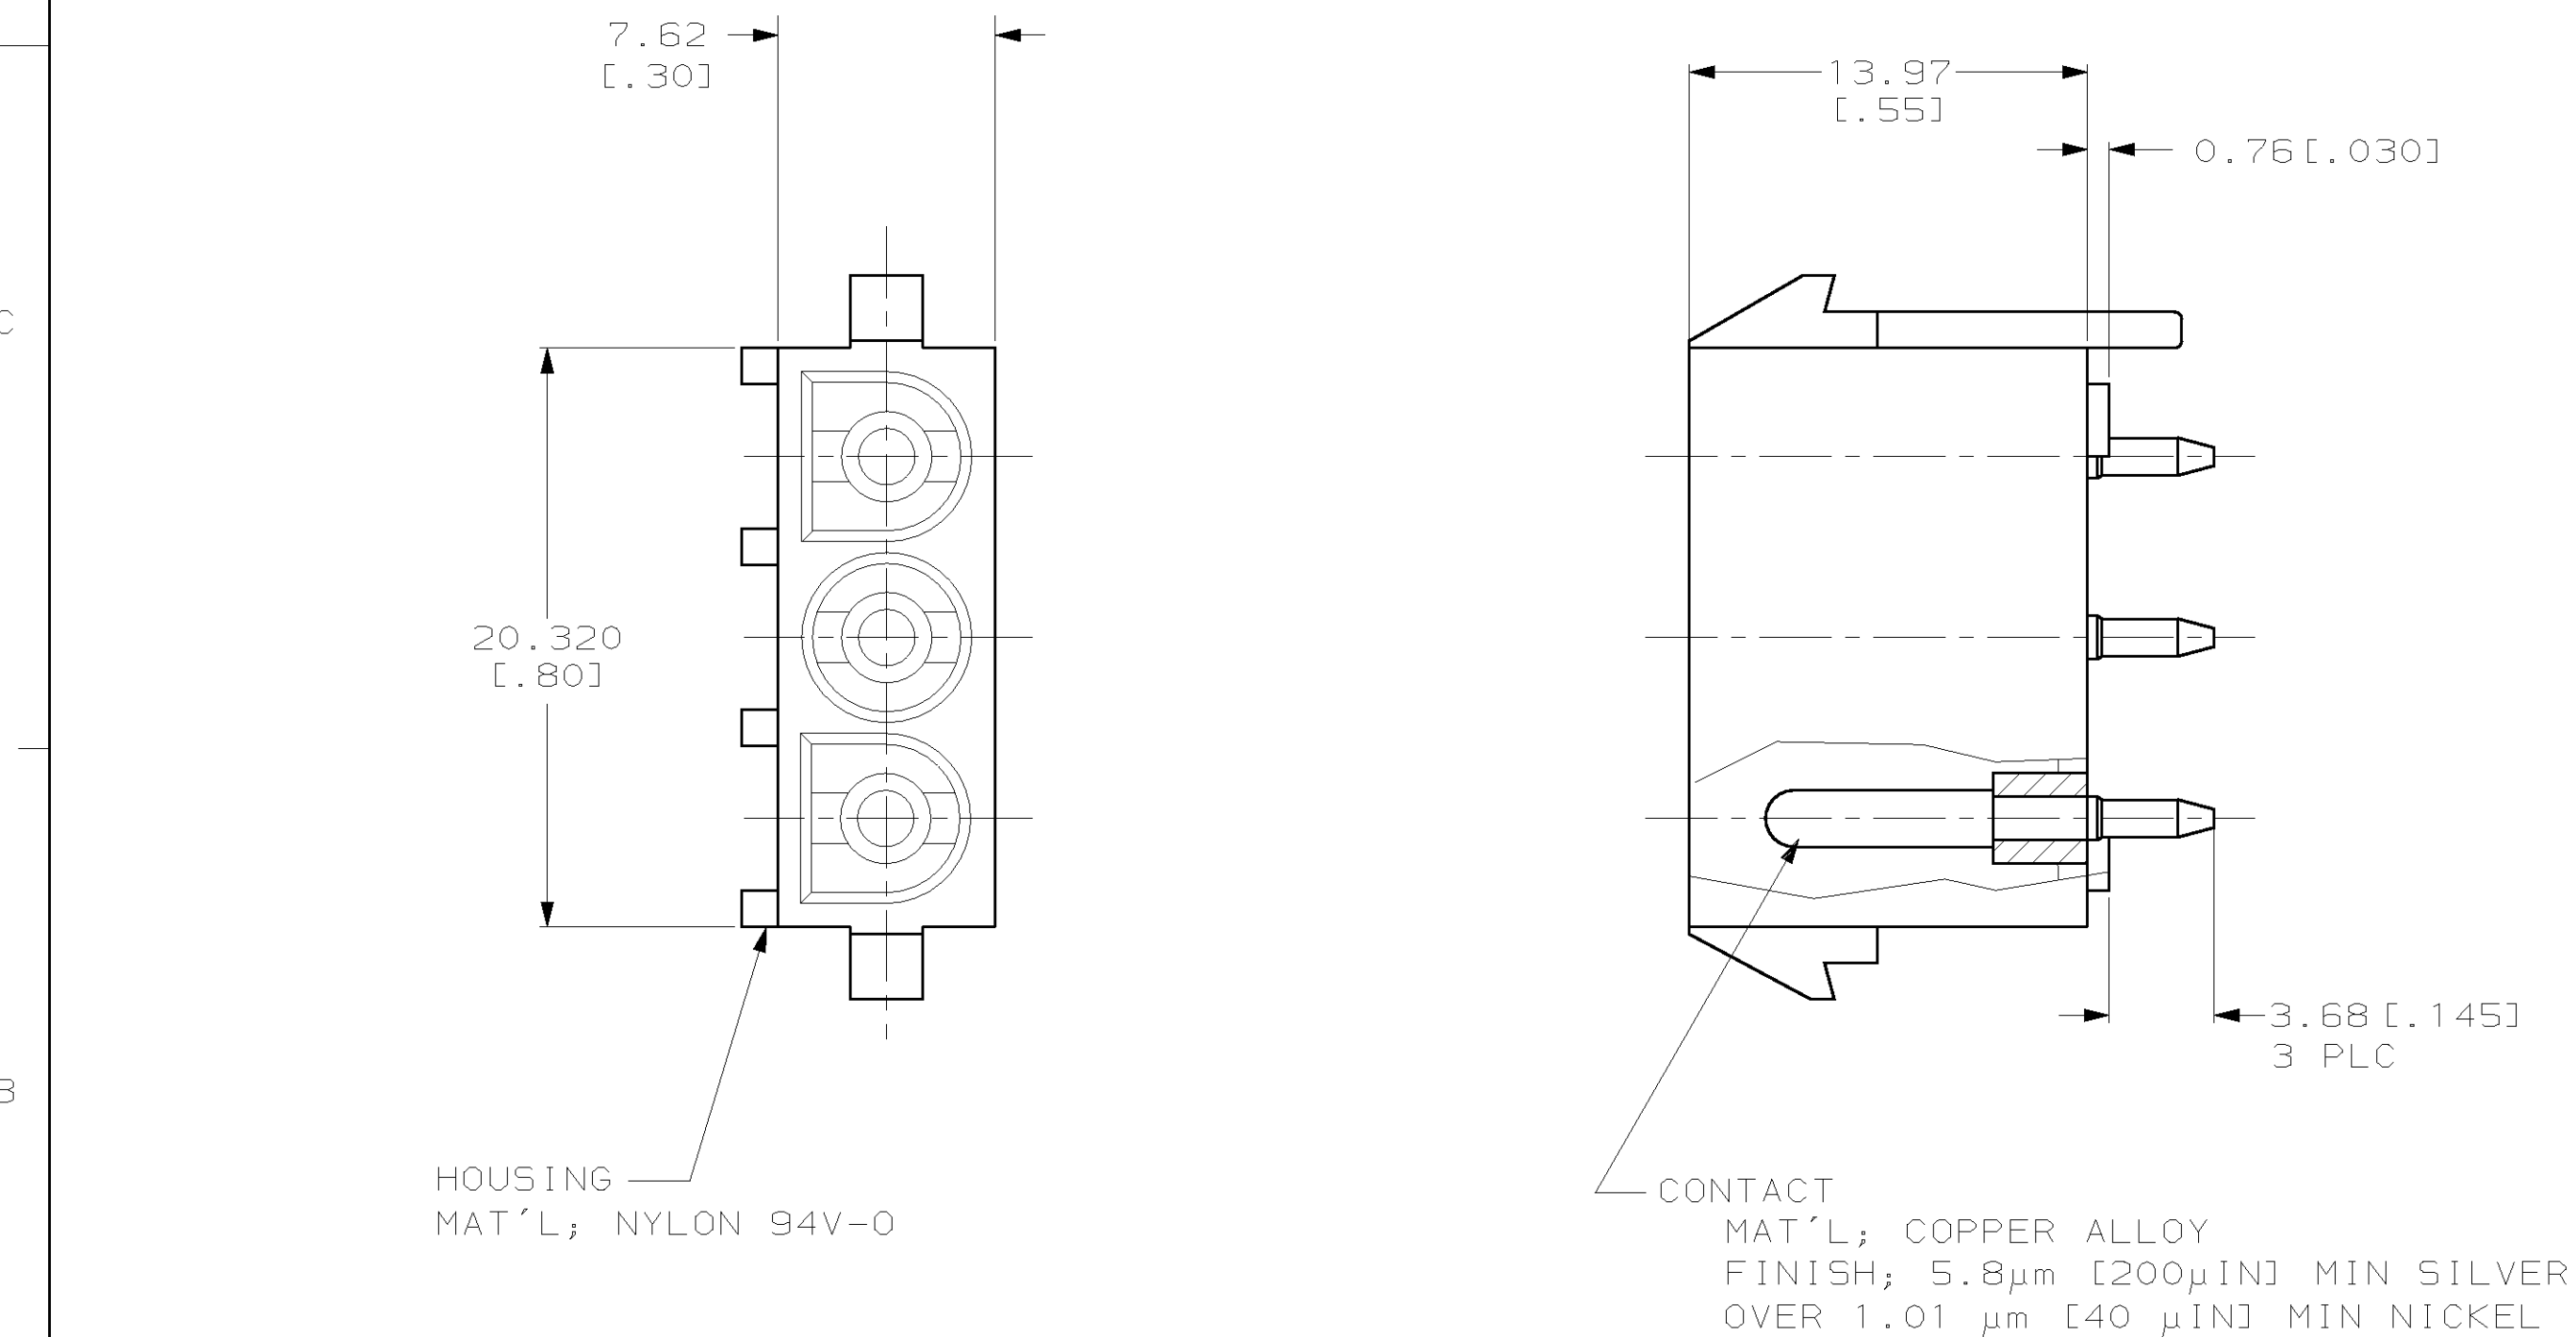

RECOMMENDED LAYOUT FOR
1.57 [.062] THICK P.C. BOARD

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.A.PUERNER		26/AUG/97		AMP AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm (in)		CHK —		—			
		APVD —		NAME		HIGH CURRENT VERT. PIN HEADER ASSY. MATE-N-LOK II, 3 CIRCUIT, LUBRICATED	
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		PRODUCT SPEC —			
		APPLICATION SPEC —		SIZE			
MATERIAL —		FINISH —		WEIGHT —		CAGE CODE A2 00779	
CUSTOMER DRAWING				DRAWING NO C-194261		SCALE —	
				SHEET 1 OF 1		REV B	