


P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	1.UPDATE TE LOGO 2.ADD LINE IDENTIFICATION 3.TERMINALS TOLERANCE CLARIFICATION 4.VENT HOLE CHANGE	ECO-12-005726	6-APR-12	D.L BH.Y

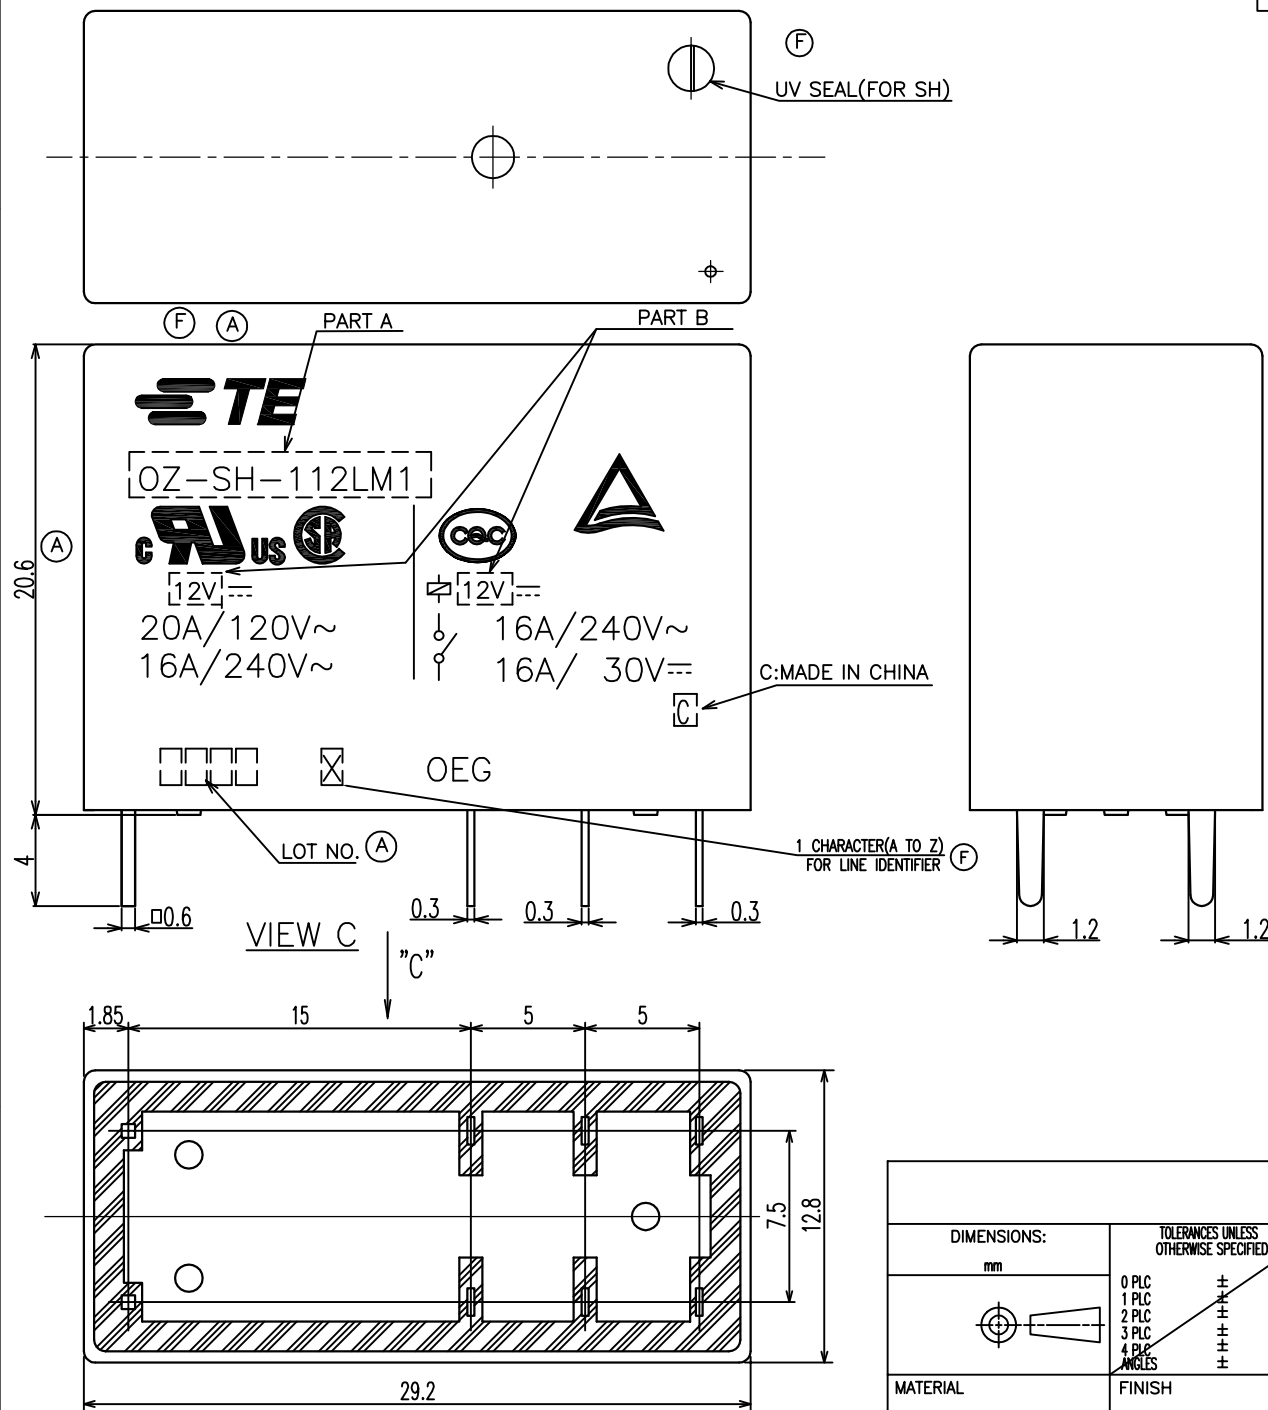


- ① NOTES:
- 1.TERMINAL DIMENSION IS NOT INCLUDING SOLDER TIP.
 - 2.LOT NUMBER SYSTEM AS FOLLOWS:

0 8 2 5
WEEK
YEAR

- 3.GENERAL TOLERANCE AS FOLLOWS:

TOLERANCE	
0~0.99mm	±0.1
1mm~2.99mm	±0.2
3mm MIN.	±0.3

- ② 4.FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH,THICKNESS AND DIAMETER.
+0.5mm FOR LENGTH.

DIMENSIONS: mm 		DWN SHIMING.CHEN		TE Connectivity			
		CHK WAYNE.PENG					
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES ± ± ± ± ± ±		APVD FUNAYAMA.NAOYA		NAME OZ-T CUSTOMER DRAWING			
		PRODUCT SPEC —					
		APPLICATION SPEC —					
		WEIGHT —					
MATERIAL —		FINISH —		SIZE A3	CAGE CODE 00779	DRAWING NO Ⓒ= 1440002-4	RESTRICTED TO —
CUSTOMER DRAWING				SCALE 4:1	SHEET 1 OF 2	REV F	

THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
© COPYRIGHT		ALL RIGHTS RESERVED.	

LOC

HH

DIST

REVISIONS

P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD

A1

1-1440002-1

OZ-SH-124L

24V

OZ-SH-124L

A1

1440002-9

OZ-SH-124D

24V

OZ-SH-124D

A1

1461252-1

OZ-SH-148L

48V

OZ-SH-148L

A1

1440002-6

OZ-SH-112D

12V

OZ-SH-112D

A1

1440002-4

OZ-SH-105D

5V

OZ-SH-105D

1461354-1

OZ-SS-118D

18V

OZ-SS-118D

3-1440002-1

OZ-SS-148L

48V

OZ-SS-148L

2-1440002-8

OZ-SS-124L

24V

OZ-SS-124L

2-1440002-5

OZ-SS-124D

24V

OZ-SS-124D

2-1440002-3

OZ-SS-112L

12V

OZ-SS-112L

2-1440002-1

OZ-SS-112D

12V

OZ-SS-112D

1-1440002-9

OZ-SS-109L

9V

OZ-SS-109L

1-1440002-8

OZ-SS-109D

9V

OZ-SS-109D

1-1440002-6

OZ-SS-106L

6V

OZ-SS-106L

1-1440002-4

OZ-SS-106D

6V

OZ-SS-106D

1-1440002-3

OZ-SS-105L

5V

OZ-SS-105L

1-1440002-2

OZ-SS-105D

5V

OZ-SS-105D

1461717-1

OZ-SH-112L

12V

OZ-SH-112L

1-1461250-8

OZ-SH-148L

48V

OZ-SH-148L

1-1461250-6

OZ-SH-148D

48V

OZ-SH-148D

1-1461250-2

OZ-SH-109L

9V

OZ-SH-109L

1-1461250-0

OZ-SH-109D

9V

OZ-SH-109D

0-1461250-8

OZ-SH-106L

6V

OZ-SH-106L

0-1461250-6

OZ-SH-106D

6V

OZ-SH-106D

0-1461250-5

OZ-SH-105L

5V

OZ-SH-105L

0-1461250-3

OZ-SH-105D

5V

OZ-SH-105D

0-1461250-2

OZ-SH-124L

24V

OZ-SH-124L

0-1461250-1

OZ-SH-112D

12V

OZ-SH-112D

0-1440002-7

OZ-SH-112L

12V

OZ-SH-112L

PART NO

EC TYPE NAME

PART B

PART A

RELAY TYPE

CIRCUIT DIAGRAM(2/1)

(BOTTOM VIEW)

DRILLING DIAGRAM

(BOTTOM VIEW)

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm		0 PLC	±
		1 PLC	±
		2 PLC	±
		3 PLC	±
		4 PLC	±
		ANGLES	±

MATERIAL

FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

SHIMING.CHEN

WAYNE.PENG

FUNAYAMA.NAOYA

—

—

—

CUSTOMER DRAWING

NAME

OZ-T CUSTOMER DRAWING

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

1440002-4

—

SCALE

SHEET

REV

4:1

2 OF 2

F