


2

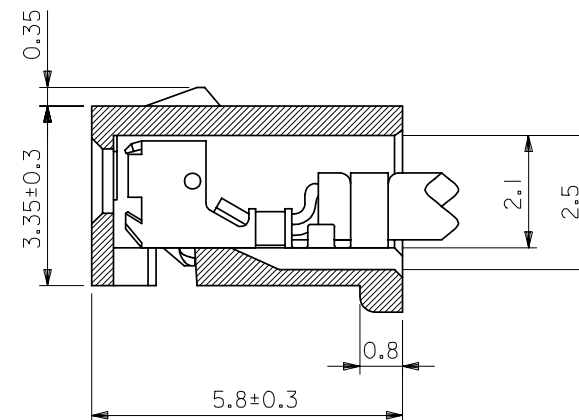

2極の場合

IN CASE OF 2 CIRCUIT HSG.

Technical drawing of a 6-pin connector. The drawing shows a side view of the connector with dimensions in millimeters (mm) and Japanese text. The dimensions are as follows:

- Overall width: $C \pm 0.3$
- Pin pitch (Pitch): B 基準 BSC. (Pitch PITCH)
- Pin diameter: $\phi 0.4$
- Pin spacing (Pitch): 1.95 基準 BSC.
- Pin diameter: 0.45
- Pin diameter: 0.7
- Pin diameter: 1.2
- Pin diameter: 1.45 基準 BSC.
- Pin diameter: 0.55

The drawing includes a table with the following information:

Pin No.	Pin Diameter (mm)	Pin Pitch (mm)	Pin Spacing (mm)
1	$\phi 0.4$	B	1.95
2	$\phi 0.4$	B	1.95
3	$\phi 0.4$	B	1.95
4	$\phi 0.4$	B	1.95
5	$\phi 0.4$	B	1.95
6	$\phi 0.4$	B	1.95

32	30.9	28	51004-1500	15
30	28.9	26	▲ -1400	14
28	26.9	24	-1300	13
26	24.9	22	-1200	12
24	22.9	20	-1100	11
22	20.9	18	-1000	10
20	18.9	16	-0900	9
18	16.9	14	-0800	8
16	14.9	12	-0700	7
14	12.9	10	-0600	6
12	10.9	8	-0500	5
10	8.9	6	-0400	4
8	6.9	4	▼ -0300	3
6	4.9	2	51004-0200	2
A	C	B	ENG.NO.	極致 CIRCUI

EC NO. DRWN: CH'K: APPR:	EC NO. DRWN: CH'K: APPR:	EC NO. DRWN: CH'K: APPR:	EC NO. DRWN: CH'K: APPR:	REDRAWN EC NO. JC2000-0629 DRWN: K.KOHAMA '00/ 3/28 CH'K: T.YAMAGUCHI '00/ 3/30 APPR: M.FUKUSHIMA '00/ 3/30	DESCRIPTION REV	MATERIAL 材料 PBT. UL94V-0 POLYESTER UL94V-0	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差	SCALE 5:1	DESIGN UNITS ☒ mm ☐ INCH	 THIRD ANGLE PROJECTION	☐ mm INCH ☐ INCH mm ☒ mm ONLY	REVISE ON CAD ONLY
						FINISH 仕上げ	10 UNDER 未満	±0.2	DRAWN BY & DATE K.KOHAMA '00/ 3/28	TITLE: 2.0 LOW-PRO REC. HSG.		
						WIRE RANGE 適用導線範囲	10 OVER 以上	30 UNDER 未満	±0.25		CHECKED BY & DATE T.YAMAGUCHI '00/ 3/30	
							30 OVER 以上		±0.3		APPROVED BY & DATE M.FUKUSHIMA '00/ 3/30	
ANGLE 角度	±3°	CAD FILENAME S51004.S01	MATERIAL NO. 51004-***00	DRAWING NO. SD-51004-***00	SHEET NO. 1							
G	REV	INS. RANGE 被覆外径						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.				SIZE B