
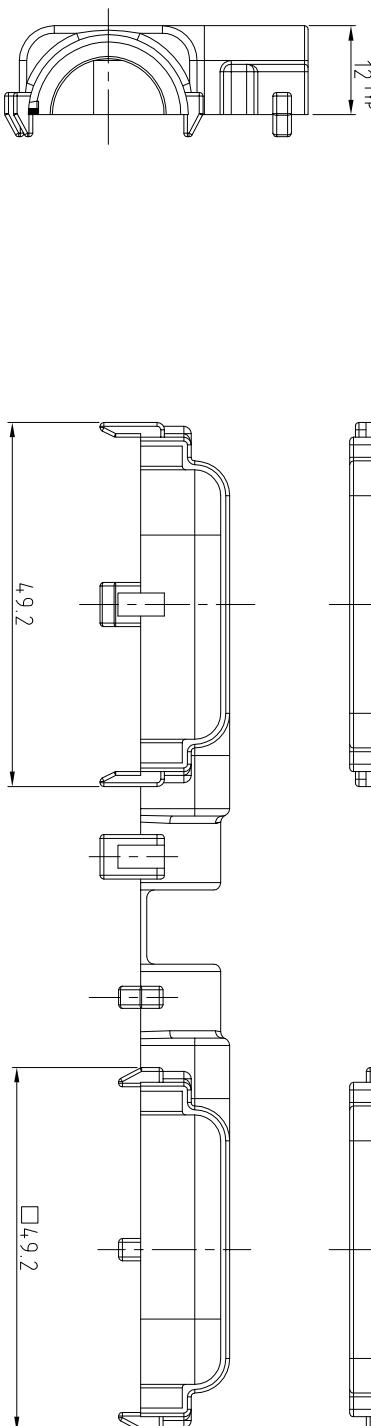



THIS DRAWING IS UNPUBLISHED
RELEASED FOR PUBLICATION
© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				APV'D
		DS	P	LTR	DATE	
		A			11/JAN/06	IS JK
		B			12/JAN/10	JY HG


THIS DRAWING IS UNPUBLISHED
RELEASED FOR PUBLICATION
© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

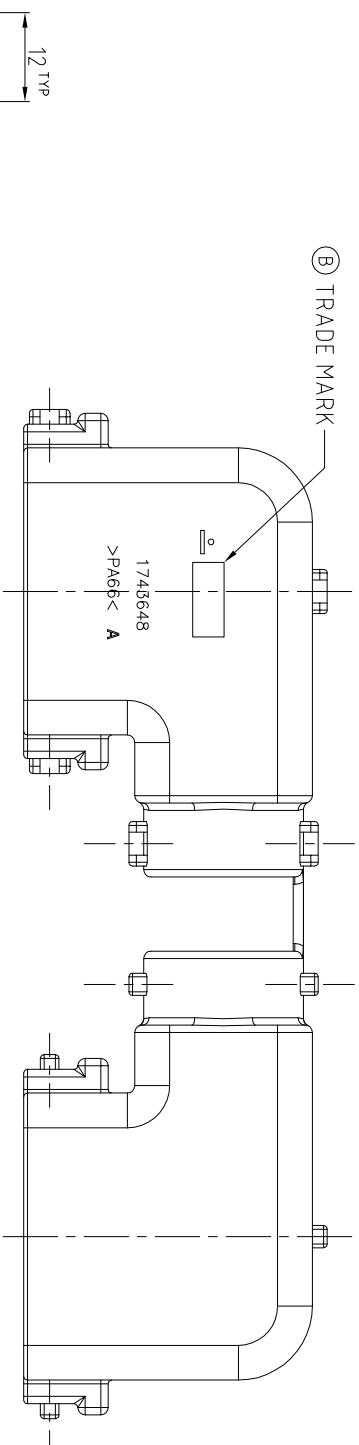

A-A

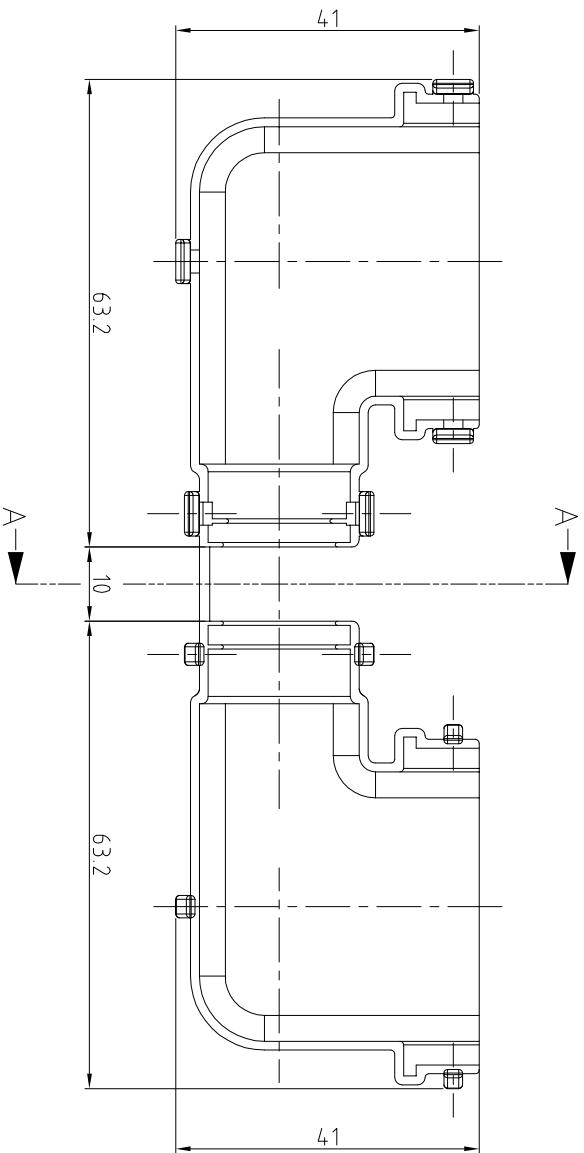

A-A

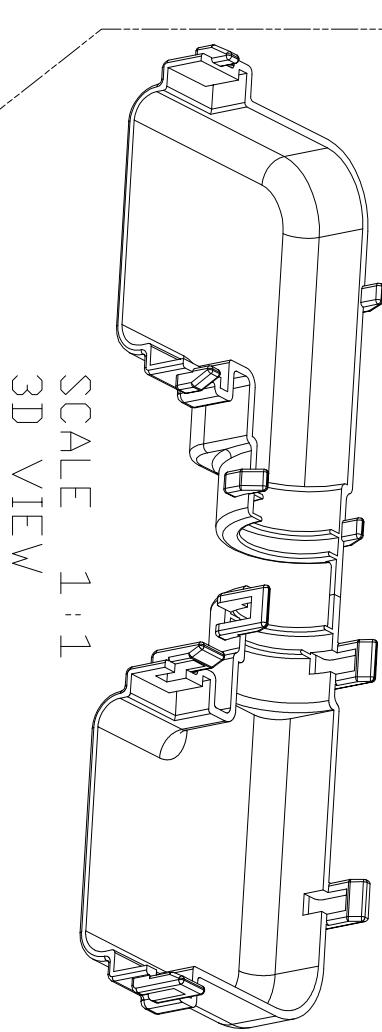

NOTES:

- WARP IS 0.5 MAX. AND FLASH IS 0.3 MAX.
- APPLICABLE CONNECTOR: X-1743062-X
- APPLICABLE CORRUGATOR DIAMETER: $\phi 14.0$
- APPLICATION TEST SPEC.: MS210-06C (EXCEPT 4.4)

TE Connectivity

control priority dimension;	
<input checked="" type="checkbox"/> CRITICAL,	<input checked="" type="checkbox"/> MAJOR, <input type="checkbox"/> MINOR
THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION	
DIMENSIONS:	mm
DECIMALS : ±0.3	ANGLES : $\pm 3^\circ$
3rd ANGLE PROJECTION	FINISH
SEE TABLE	
CUSTOMER DRAWING	SCALE 2/1
	SHEET 1 OF 1
	REV B