

Ultra High Precision Bulk Metal® Z-Foil Surface Mount Voltage Divider, TCR Tracking of $< 0.1 \text{ ppm/}^{\circ}\text{C}$, PCR of $\pm 5 \text{ ppm}$ at Rated Power and Stability of $\pm 0.005 \%$ (50 ppm)



INTRODUCTION

Bulk Metal® Z-Foil technology out-performs all other resistor technologies available today for applications that require ultra-high precision and ultra-high stability.

The Z-Foil technology provides a significant reduction of the resistive element's sensitivity to ambient temperature variations (TCR) and to self heating when power is applied (power coefficient).

The DSMZ offers low TCR (both absolute and tracking), low PCR, excellent load life stability, tight tolerance match, excellent ratio stability, low thermal EMF, and low current noise - all in one package.

The **DSMZ** surface mount divider provides a matched pair of Bulk Metal® Z-Foil resistors in a small epoxy molded package. The electrical specification of this integrated construction offers improved performance and better real estate utilization over discrete resistors and matched pairs.

Our application engineering department is available to advise and make recommendations. For non-standard technical requirements and special applications, please contact us.

TABLE 1 - RESISTANCE VALUES AND TOLERANCES (1)


RESISTANCE VALUES	100 Ω to 10 k Ω per resistor (2)
ABSOLUTE TOLERANCE EACH RESISTOR	$\pm 0.02 \%$, $\pm 0.05 \%$, $\pm 0.1 \%$
RESISTANCE TOLERANCE MATCH	0.01 %, 0.02 %, 0.05 %
TCR	Absolute: (typical and maximum spread): $\pm 0.2 \pm 2.0 \text{ ppm/}^{\circ}\text{C}$ Tracking: (maximum) For $R_1/R_2 = 1$ 0.5 ppm/ $^{\circ}\text{C}$ For $1 < R_1/R_2 \leq 10$ 1.0 ppm/ $^{\circ}\text{C}$ For $10 < R_1/R_2 \leq 100$ 2.0 ppm/ $^{\circ}\text{C}$

Notes

(1) Tighter performances are available

(2) 100 Ω to 12 k Ω per resistor available in DSM

FIGURE 1 - SCHEMATIC

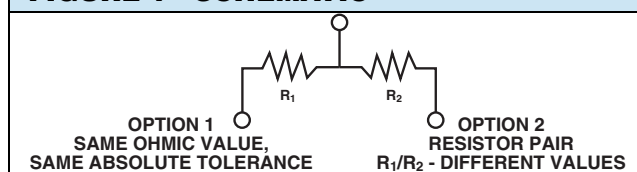

* Pb containing terminations are not RoHS compliant, exemptions may apply

FEATURES

- Temperature coefficient of resistance (TCR):
Absolute: $\pm 0.05 \text{ ppm/}^{\circ}\text{C}$ typ. (0 $^{\circ}\text{C}$ to + 60 $^{\circ}\text{C}$)
 $\pm 0.2 \text{ ppm/}^{\circ}\text{C}$ typ. (- 55 $^{\circ}\text{C}$ to + 125 $^{\circ}\text{C}$, + 25 $^{\circ}\text{C}$ Ref.)
Tracking: 0.1 ppm/ $^{\circ}\text{C}$ typical
- Power coefficient tracking
"ΔR due to self heating": $\pm 5 \text{ ppm}$ at rated power
- Power rating at 70 $^{\circ}\text{C}$: entire package: 0.1 W,
each resistor: 0.05 W
- Tolerance: absolute: $\pm 0.02 \%$; match: 0.01 %
- Ratio stability: 0.005 % (0.05 W at 70 $^{\circ}\text{C}$, 2000 h)
- Resistance range: 100 Ω to 10 k Ω per resistor
- Large variety of resistance ratios: 1:100
- Foil resistors are not restricted to standard values/ ratios; specific "as required" values/ratios can be supplied at no extra cost or delivery (e.g. 1K234/2K345 vs. 1K/2K)
- Electrostatic discharge (ESD) up to 25 000 V
- Short time overload $\leq 0.005 \%$
- Non-inductive, non-capacitive design
- Rise time: 1 ns effectively no ringing
- Current noise: $< - 40 \text{ dB}$
- Thermal EMF: 0.05 $\mu\text{V/}^{\circ}\text{C}$ typical
- Voltage Coefficient: $< 0.1 \text{ ppm/V}$
- Non Inductive: $< 0.08 \mu\text{H}$
- Non Hot Spot Design
- Terminals: silver coated copper alloy
- Compliant to RoHS directive 2002/95/EC
- Prototype quantities available in just 5 working days or sooner. For more information, please contact foil@vpgsensors.com
- For better performances, please contact application engineering



RoHS*
COMPLIANT

APPLICATIONS

- Instrumentation amplifiers
- Bridge networks
- Differential amplifiers
- Ratio arms in bridge circuits
- Medical and test equipment
- Military
- Airborne etc.




FIGURE 2 - POWER DERATING CURVE

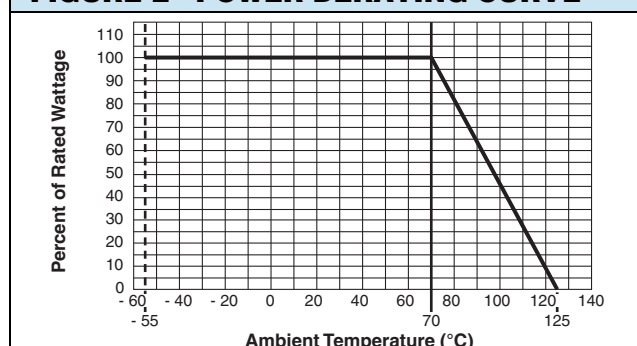
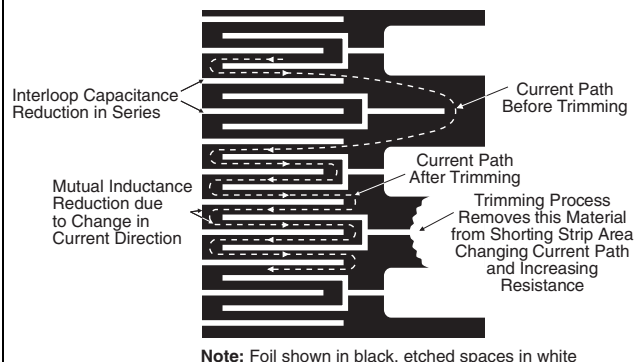
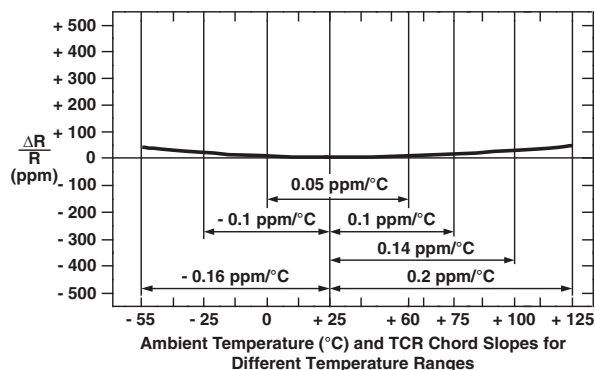



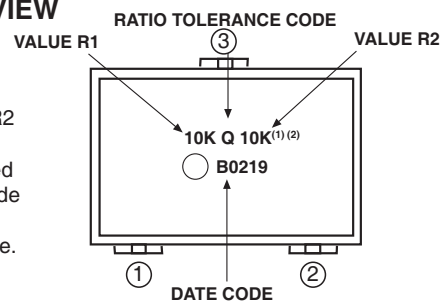


FIGURE 3 - TRIMMING TO VALUES
 (Conceptual Illustration)

FIGURE 4 - TYPICAL RESISTANCE/TEMPERATURE CURVE
 (For more details, see table 1)

FIGURE 5 - DIMENSIONS AND IMPRINTING
SIDE VIEW

FRONT VIEW

BOTTOM VIEW

TOP VIEW

Notes

- (1) If the resistance value of R1 and R2 contains more than 6 characters together, the VCODE will be printed instead (see Resistance Value Code List for Popular Ratios Table) followed by the ratio tolerance code.
- (2) R1—between PIN1 and PIN3
R2—between PIN2 and PIN3.

DIMENSIONS	L	W	H	P	TW	TH	S	t
INCHES	0.160 ± 0.008	0.106 ± 0.008	0.063 ± 0.008	0.031 ± 0.005	0.031 ± 0.004	0.043 ± 0.008	0.100 ± 0.008	0.005 ± 0.002
MILLIMETERS	4.06 ± 0.20	2.69 ± 0.20	1.60 ± 0.20	0.79 ± 0.13	0.79 ± 0.10	1.09 ± 0.20	2.54 ± 0.20	0.13 ± 0.05



FIGURE 6 - RECOMMENDED LAND PATTERN


TABLE 2 - PERFORMANCE SPECIFICATIONS (Test Method Per MIL-PRF-914)

SPECIFICATIONS	TYPICAL LIMITS
Power rating at 70 °C	Entire package: 0.1 W Each resistor: 0.05 W
Maximum Working Voltage (each resistor)	25 V
Working Temperature Range	- 65 °C to + 125 °C
Thermal Shock 25 x (- 65 °C to + 125 °C)	$\Delta R = 0.01\%$ (100 ppm) $\Delta \text{Ratio} = 0.005\%$ (50 ppm)
Thermal Shock 5 x (- 65 °C to + 125 °C) and Power Conditioning 1.5 rated power at 25 °C, 100 hours	$\Delta R = 0.015\%$ (150 ppm) $\Delta \text{Ratio} = 0.01\%$ (100 ppm)
DWV atmospheric pressure, 200 V (A.C.), 1 minute	Successfully passed
Insulation Resistance 100 V (D.C.), 1 minute	> 10 ⁴ M Ω
Resistance to Soldering Heat	$\Delta R = 0.01\%$ (100 ppm) $\Delta \text{Ratio} = 0.005\%$ (50 ppm)
Moisture Resistance + 65 °C to - 10 °C; 90 % to 98 % RH; 0.1 x rated power, 240 hours	$\Delta R = 0.02\%$ (200 ppm) $\Delta \text{Ratio} = 0.005\%$ (50 ppm)
Shock (Specified Pulse) 100 G	$\Delta R = 0.005\%$ (50 ppm) $\Delta \text{Ratio} = 0.0025\%$ (25 ppm)
Vibration, High Frequency (10 Hz - 2000 Hz), 20 G	$\Delta R = 0.01\%$ (100 ppm) $\Delta \text{Ratio} = 0.005\%$ (50 ppm)
High Temperature Exposure 100 hours at 125 °C	$\Delta R = 0.01\%$ (100 ppm) $\Delta \text{Ratio} = 0.005\%$ (50 ppm)
Low Temperature Storage 24 hours at - 65 °C	$\Delta R = 0.005\%$ (50 ppm) $\Delta \text{Ratio} = 0.005\%$ (50 ppm)
Load Life Stability 2000 hours at + 70 °C; rated power	$\Delta R = 0.005\%$ (50 ppm) $\Delta \text{Ratio} = 0.005\%$ (50 ppm)
Short Time Overload 6.25 x Rated Power; 5 seconds	$\Delta R = 0.005\%$ (50 ppm) $\Delta \text{Ratio} = 0.0025\%$ (25 ppm)
Low Temperature Operation	$\Delta R = 0.005\%$ (50 ppm) $\Delta \text{Ratio} = 0.0025\%$ (25 ppm)
Weight	0.04 g

TABLE 3 - GLOBAL PART NUMBER INFORMATION (1)

NEW GLOBAL PART NUMBER: Y4485V0067QT9W (preferred part number format)

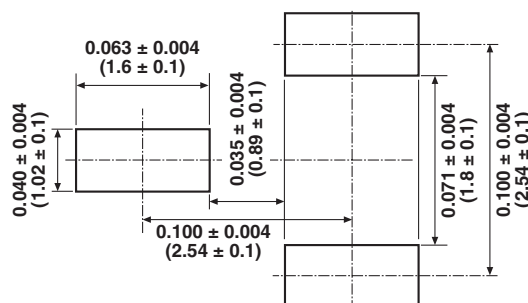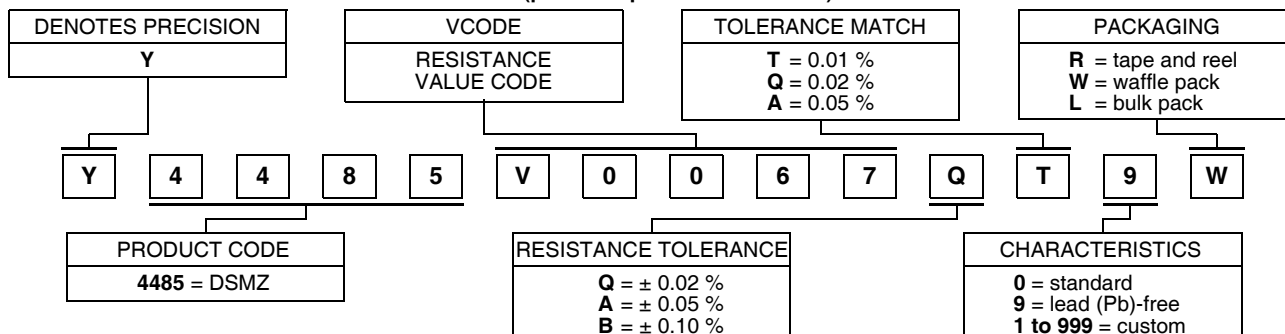

FOR EXAMPLE: ABOVE GLOBAL ORDER Y4485 V0067 Q T 9 W:

TYPE: DSMZ

VALUES: 10K/400R

ABSOLUTE TOLERANCE: ± 0.02 %

TOLERANCE MATCH: 0.01 %

TERMINATION: lead (Pb)-free

PACKAGING: waffle pack

HISTORICAL PART NUMBER: DSMZ 10K 400R TCR0.2 Q T S W (will continue to be used)

DSMZ	10K 400R	TCR0.2	Q	T	S	W
MODEL	OHMIC VALUE	TCR CHARACTERISTIC	ABSOLUTE TOLERANCE	TOLERANCE MATCH	TERMINATION	PACKAGING
	R₁ = 10 kΩ R₂ = 400 Ω		Q = ± 0.02 % A = ± 0.05 % B = ± 0.10 %	T = 0.01 % Q = 0.02 % A = 0.05 %	S = lead (Pb)-free B = tin/lead	T = tape and reel W = waffle pack B = bulk pack

Note

(1) For non-standard requests or additional values, please contact application engineering.

TABLE 4 - RESISTANCE VALUE CODE LIST FOR POPULAR RATIOS (1)

VCODES	R1/R2 RATIO	R1	R2	VCODES	R1/R2 RATIO	R1	R2
V0052	100	10K	100R	V0080	2.5	1K	400R
V0065	50	10K	200R	V0081		500R	200R
V0066		5K	100R	V0082		10K	5K
V0067	25	10K	400R	V0083		2K	1K
V0068		5K	200R	V0084	2	1K	500R
V0069		10K	500R	V0085		400R	200R
V0070	20	2K	100R	V0086		200R	100R
V0071		10K	1K	V0087	1.25	500R	400R
V0072	10	2K	200R	V0001		10K	10K
V0073		1K	100R	V0002		5K	5K
V0074		5K	1K	V0059		2K	2K
V0075	5	2K	400R	V0004	1	1K	1K
V0076		1K	200R	V0091		500R	500R
V0077		500R	100R	V0090		400R	400R
V0246		10K	2K5	V0089		200R	200R
V0078	4	2K	500R	V0088		100R	100R
V0079		400R	100R				

Note

(1) Other values available upon request.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase.

To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.