
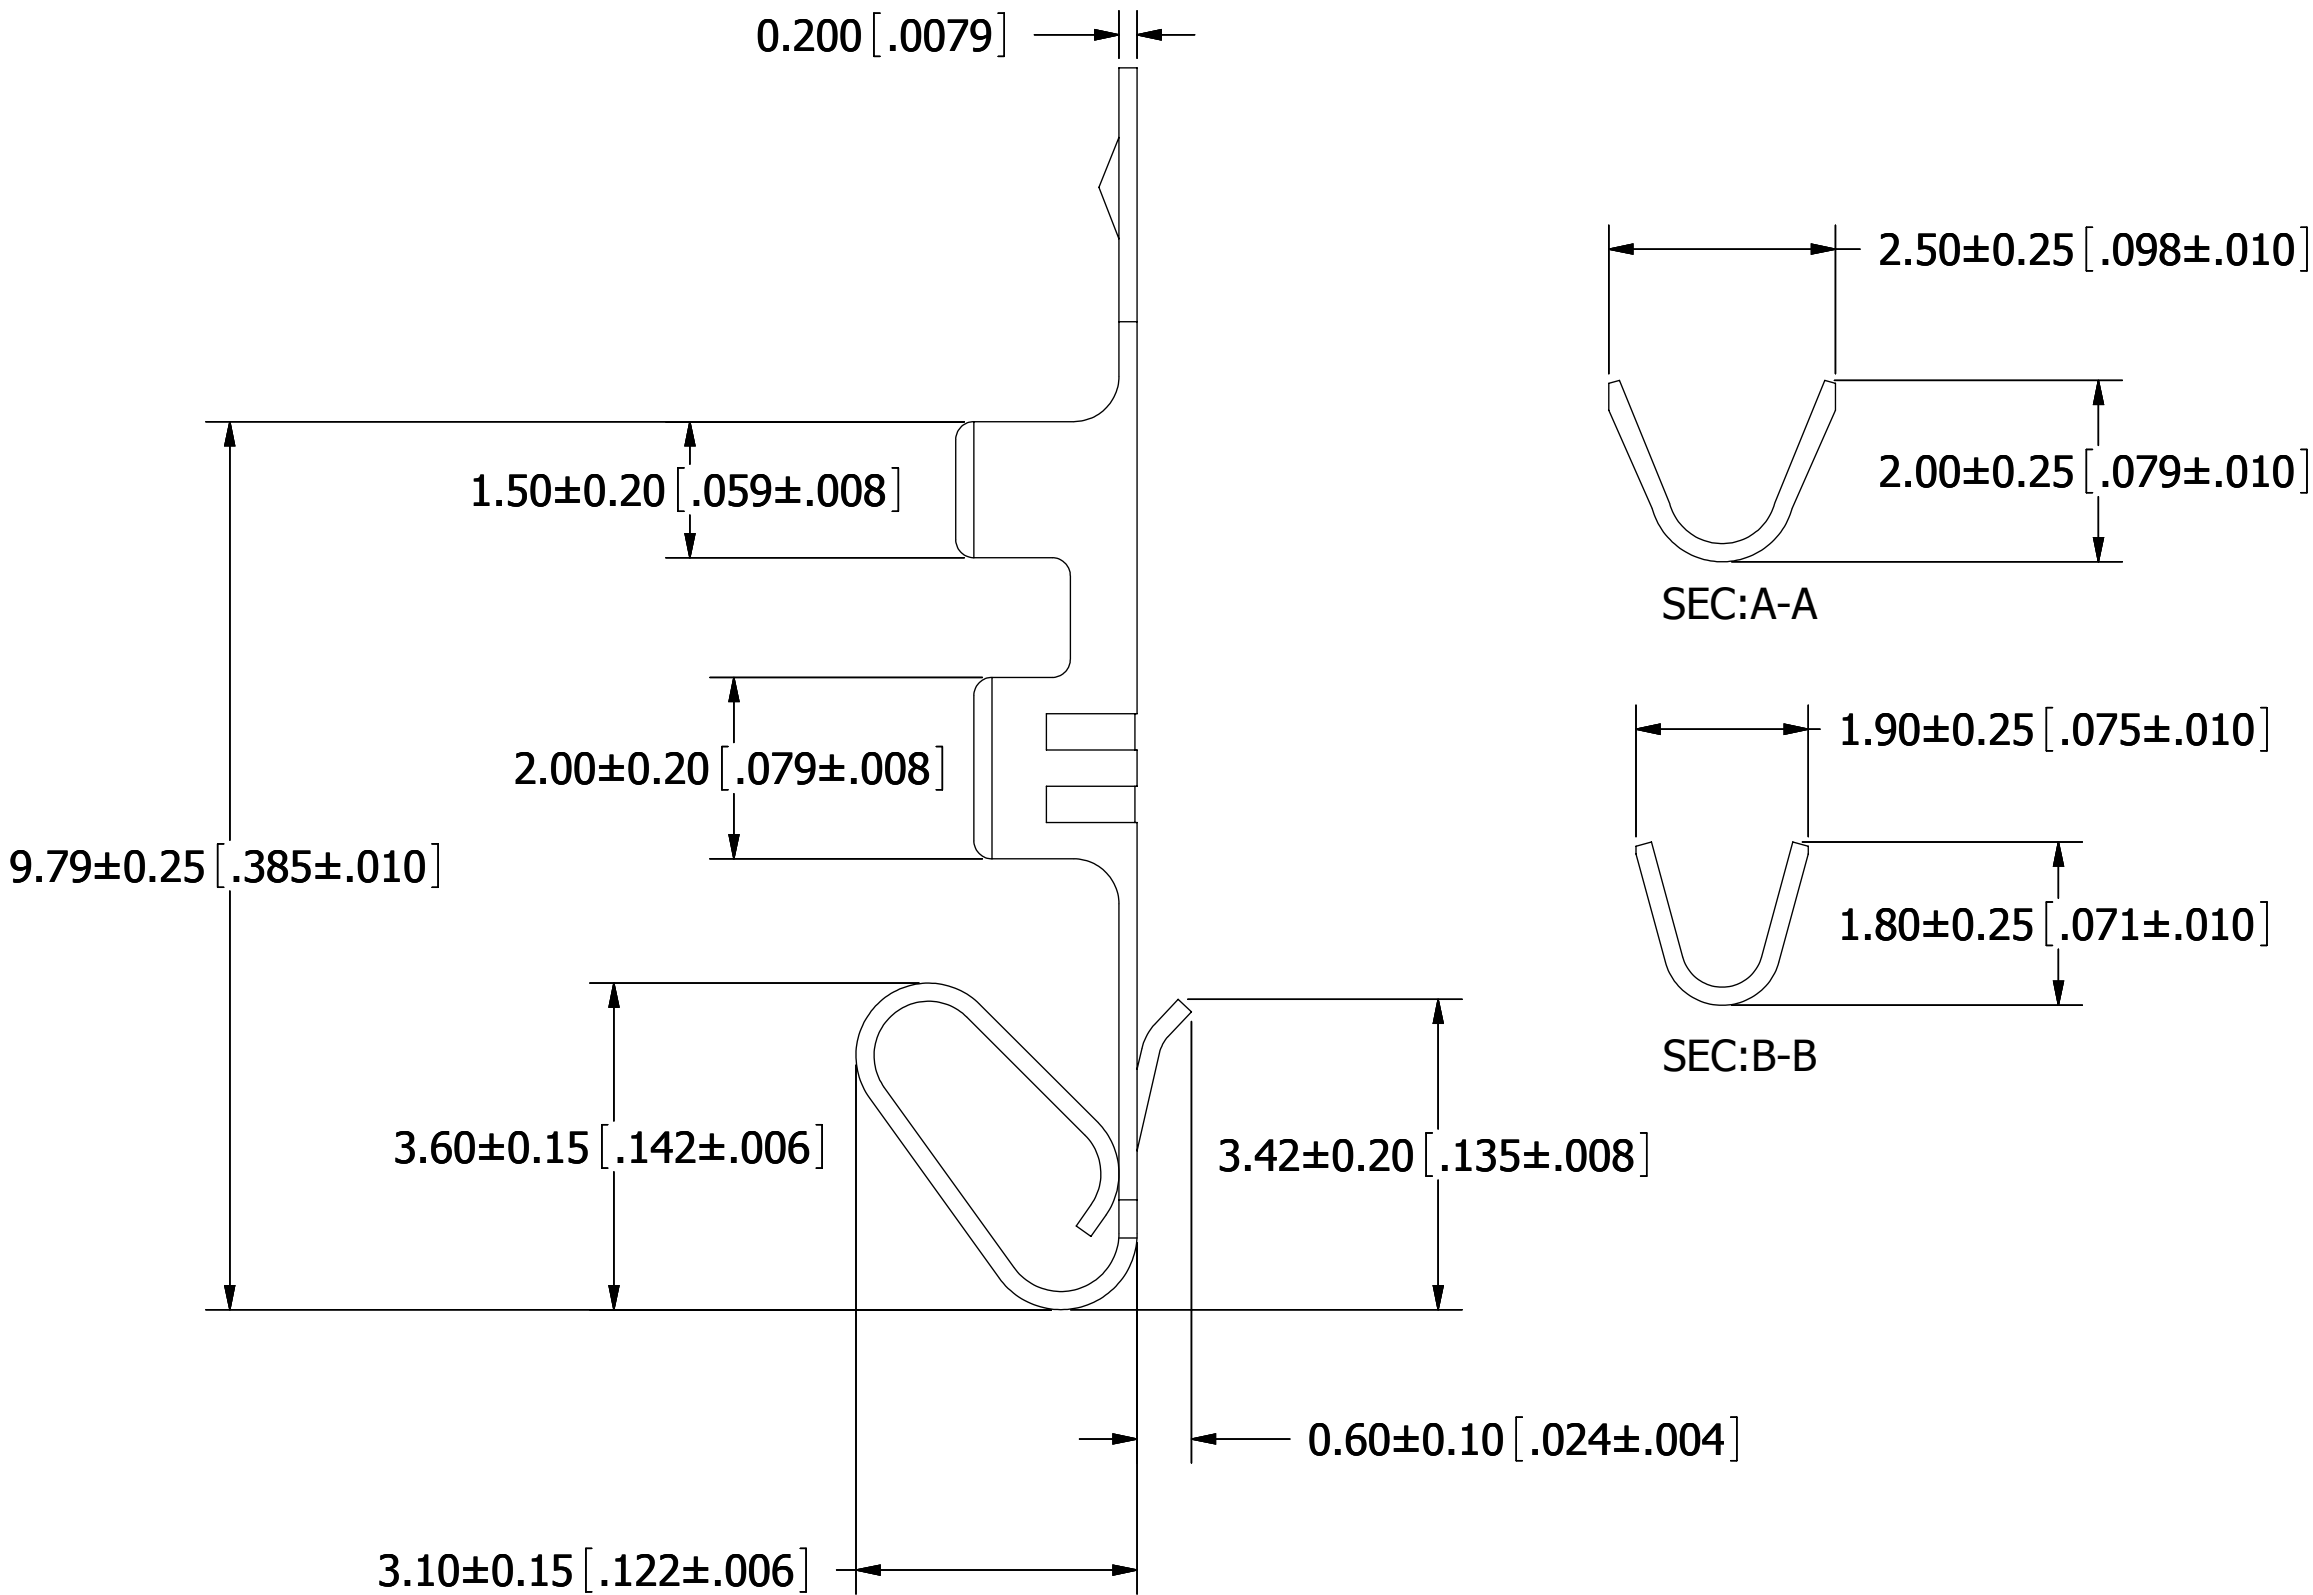


PART NUMBER CODING
SWT25X-U__C-S01-UU-UU

MATREIAL & PLATING

RE = BRASS, TIN OVERALL.
PE = PHOSPHOR BRONZE, TIN OVERALL.
RP = BRASS, GOLD FLASH OVERALL.

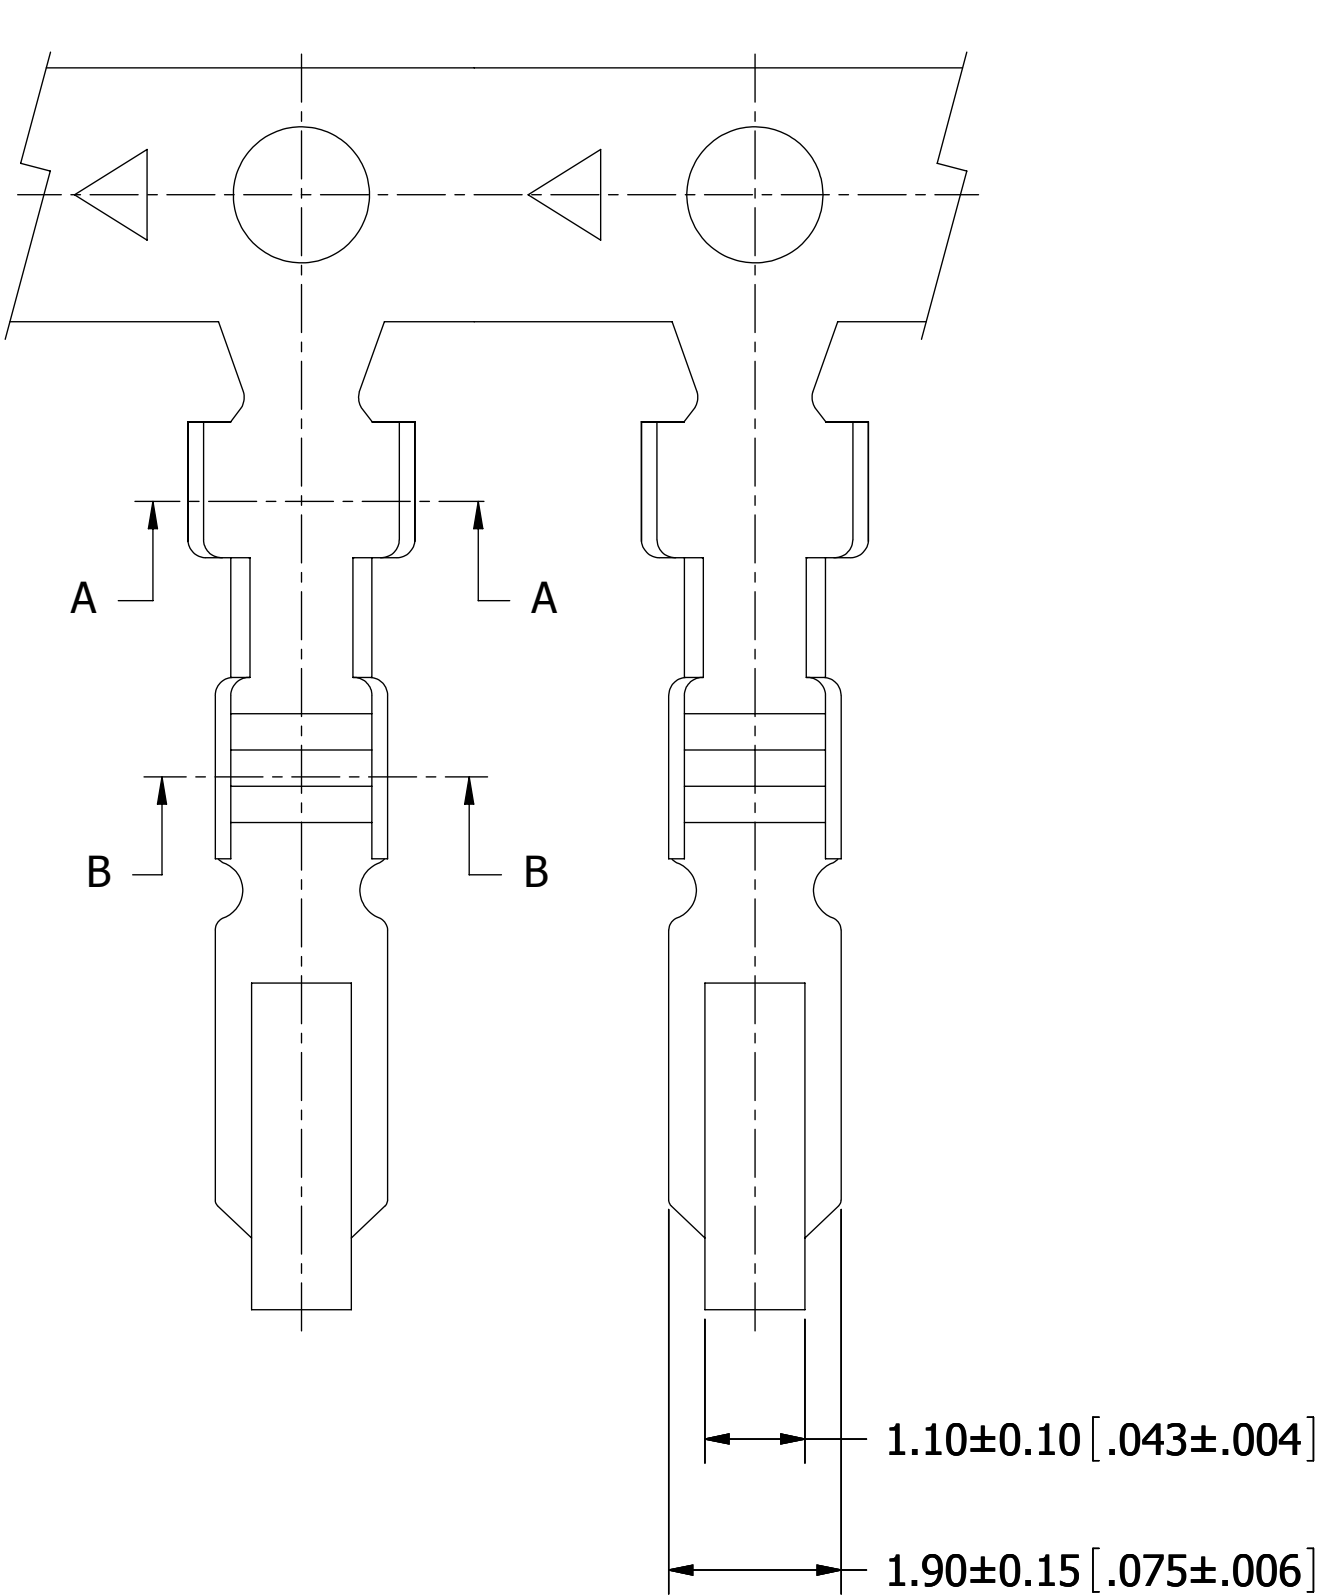


- NOTES:
1. MATERIAL: SEE PART NUMBER CODING.
 2. PLATING: SEE PART NUMBER CODING.
 3. WIRE RANGE: AWG #24 - #30.
 4. INSULATION O.D.: 1.57mm MAX.
 5. QUANTITY PER REEL = 10,000 PIECES.
 6. USED IN SWH25X, SWH25A, SWH25B, SWH25C SERIES HOUSING.



UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MM[INCHES]
TOLERANCES:
ANGULAR: ± 5°
.X=± .3 [.01]
.XX=± .15 [.006]
.XXX=± .050 [.0020]
SURFACE FINISH: 63 R_a
REMOVE ALL BURRS AND SHARP EDGES .010 MAX

INTERPRET DIMENSIONS AND GEOMETRIC TOLERANCING PER: ANSI Y14.5M-1994

DATE		NAME		 SULLINS CONNECTOR SOLUTIONS	
DRAWN		9/16/09 JH			
THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.				DESCRIPTION	
				CRIMP TERMINAL - SWH25X, 25A, 25B, 25C	
				PART NUMBER	
				SWT25X-U _C-S01-UU-UU	
		SIZE		DWG. NO.	
		C		11311	
				REV	
				A	
SCALE: 12:1				SHEET 1 OF 1	