



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn98%, Cu2%	Yes	Yes

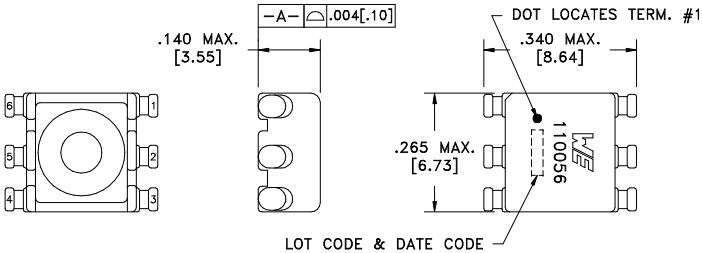

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	0.35 ohms max.
D.C. RESISTANCE	6-4 @20°C	0.36 ohms max.
INDUCTANCE	1-3 10kHz, 100mVAC, Ls	70uH min.
INDUCTANCE	6-4 10kHz, 100mVAC, Ls	80uH min.
DIELECTRIC	1-6 5000VDC, 1 second	-
URNS RATIO	(6-4):(1-3)	1.08:1, ±1%

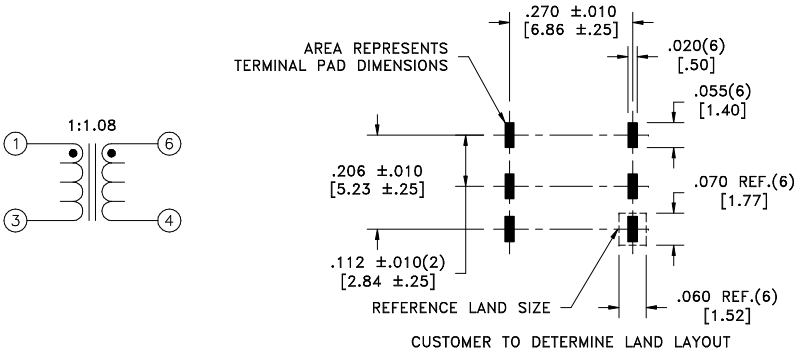



GENERAL SPECIFICATIONS:
 OPERATING TEMPERATURE RANGE: -20°C to +85°C.
 STORAGE TEMPERATURE RANGE: -40°C to +105°C.

COPLANARITY: All 6 terminals must lie on a plane within .004 [.10] of Surface A after lead tinning.

Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	 CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. 750110056
6C	2/11	Method: Tape & Reel				
6B	10/10	PKG-0548 www.we-online.com/midcom				
6A	6/10	SEE REVISION SHEET FOR				



This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

eiSos p/n: 750110056

