




HLT3I-X2

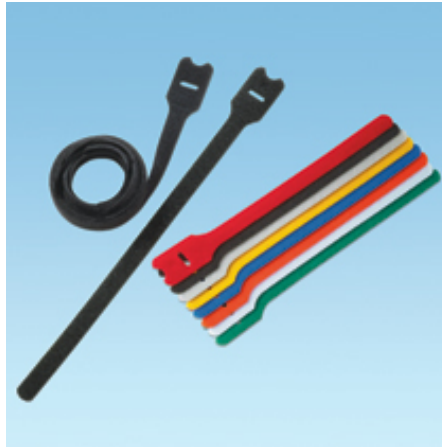


- Broadest selection of sizes, styles, and colors to meet your application needs
- Adjustable, releasable, and reusable hundreds of times – ideal for applications requiring frequent moves, adds, or changes
- Hook and loop material maintains network data integrity by protecting against over-tensioning of high performance copper and fiber cables
- Easy to use and operator safe with no sharp edges

Note: Minimum 2" overlap required to achieve loop tensile rating

■ Part Number	HLT3I-X2
■ RoHS Compliancy Status	Compliant
■ Part Description	Hook & Loop Cable Tie, Loop Tie, 12.0", Intermediate cross section
■ Product Type	Cable Ties
■ Material	Nylon Loop, Polyethylene Hook
■ Color	Red
■ CSA Certified	No
■ UL Listed (File #E56854)	No
■ UL Recognized (File #E56854)	No
■ Length (In.)	12.0
■ Length (mm)	305
■ Width (In.)	.500
■ Width (mm)	12.7
■ CE Compliant	Yes
■ Cross Section	Intermediate
■ Locking Style	Hook & Loop
■ Max. Bundle Diameter (In.)	3.18
■ Max. Bundle Diameter (mm)	81
■ Min. Loop Tensile Strength (Lbs.)	40
■ Min. Loop Tensile Strength (N)	178
■ Pricing Description	Hook & Loop Tie, Loop Style, 12.0"L (305mm), .50"W (12.7mm), Red
■ Temperature Range	0°F to 220°F
■ Thickness (In.)	.10
■ Thickness (mm)	2.5
■ Min. Order UOM	PC
■ Min. Order Qty.	10

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

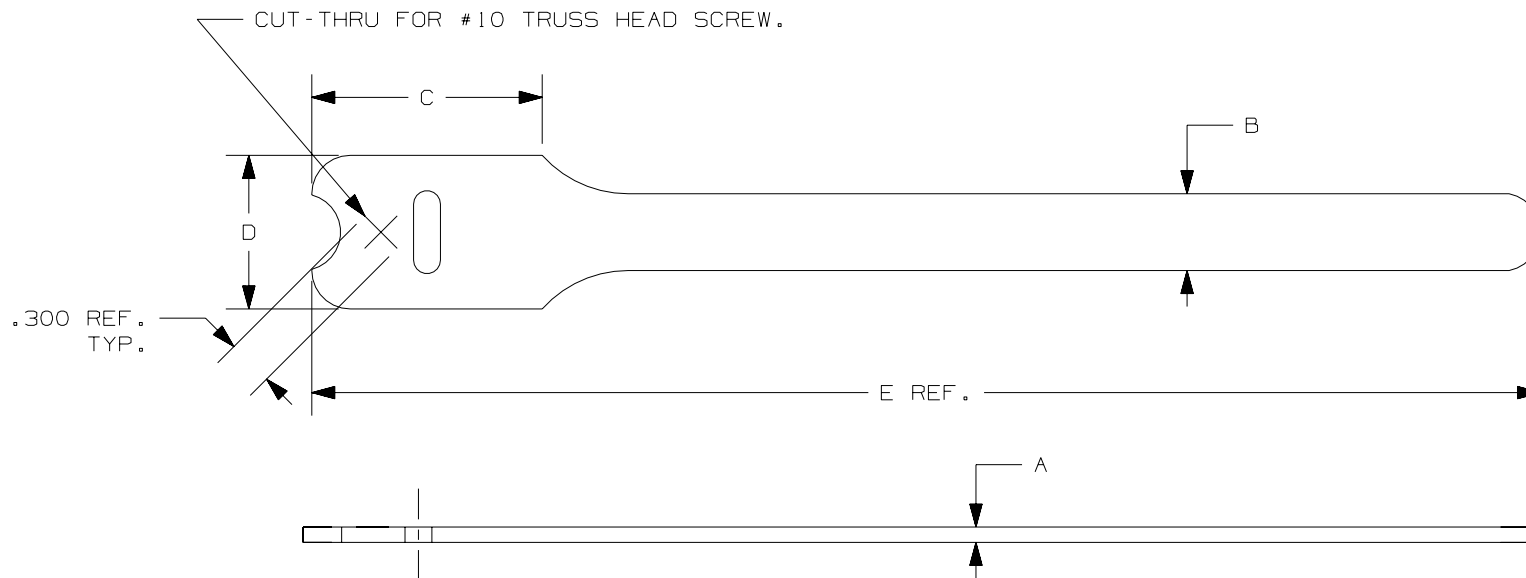

PANDUIT PART NO.	BUNDLE DIA.		A	B	C	D	E	MIN. LOOP * TENSILE lbs. (N)	CROSS SECTION	APPROXIMATE WEIGHT lbs/100 PIECES (g)
	MIN. in (mm)	MAX. in (mm)								
HLT21	.25 (6.4)	1.91 (48.5)	.100 (2.5)	.50 (12.7)	1.50 (38.1)	1.00 (25.4)	8.0 (203)	40 (178)	INTERMEDIATE	.48 (218)
HLT31	.25 (6.4)	3.18 (80.6)	.100 (2.5)	.50 (12.7)	1.50 (38.1)	1.00 (25.4)	12.0 (305)	40 (178)	INTERMEDIATE	.65 (295)

NOTES:

- 1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
- * 2) MINIMUM 2" OVERLAP REQUIRED TO ACHIEVE LOOP TENSILE RATING.

										CAD FILENAME/LAYERS	
										DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS	
										SS_26938_06.PRT	
										PANDUIT CORP. TINLEY PARK, ILLINOIS	
										TAK-TY™ HOOK & LOOP CABLE TIES	
										HLT SERIES	
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± .030 (.XX) ± .125 ANGLES ±	
										UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
6	1/13/06	ERW		ADDED APPROX. WEIGHT PER 100 PIECES	26938	6				DRAWN BY KET	MAT'L:
5	5/3/05	ERW	JVL	REMOVED OVAL SLOT DIMENSION TO BE CONSISTENT WITH OTHER CUSTOMER DRAWINGS	26938	5	JVL			DATE 11/28/94	POLYETHYLENE HOOK/ NYLON KNIT LOOP
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP		CHK'D HVP	
										SCALE NONE	
										DRAWING NO.	
										SS-26938	
										DWG A SIZE	