


Slotted Optical Switches

Types OPB830L, OPB840L Series

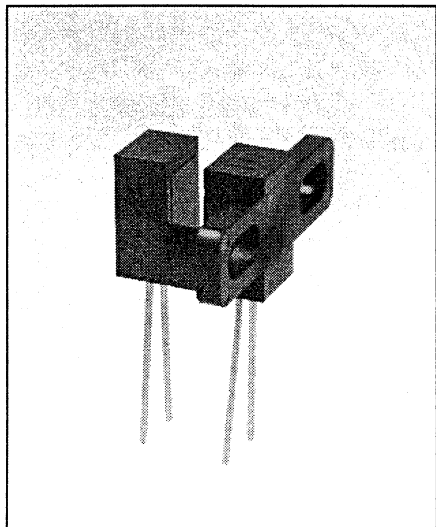


Features

- 0.125" (3.18 mm) wide slot
- Choice of aperture
- Choice of opaque or IR transmissive shell material
- Side mounting configuration
- Choice of lead spacing

Description

This series of slotted switches provides the design engineer with the flexibility of a custom device from a standard product line. Building from a standard housing with a .125" (3.18 mm) wide slot, the user can specify (1) electrical output parameters, (2) choice of lead spacing, (3) discrete shell material and (4) aperture width.

All housings are an opaque grade of injection-molded plastic to minimize the assembly's sensitivity to ambient radiation, both visible and near-infrared. Discrete shells (exposed only on the parallel faces inside the device throat) are either IR transmissive plastic for applications where aperture contamination may occur or opaque plastic with aperture openings for maximum protection against ambient light.

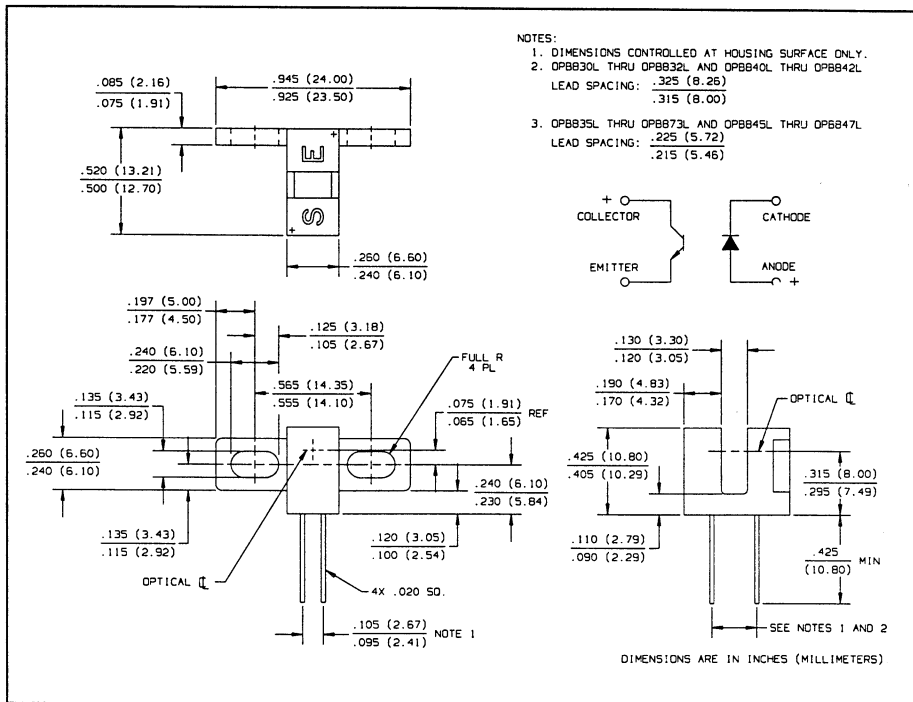

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Storage and Operating Temperature Range -40°C to $+85^\circ\text{C}$ ⁽¹⁾
Lead Soldering Temperature [1/16 inch (1.6 mm) from case for 5 sec. with soldering iron] 240°C ⁽²⁾

Input Diode

Forward DC Current 50 mA
Peak Forward Current (1 μs pulse width, 300 pps) 3.0 A
Reverse DC Voltage 2.0V
Power Dissipation 100 mW ⁽¹⁾

Output Phototransistor

Collector-Emitter Voltage 30 V
Emitter-Collector Voltage 5.0 V
Collector DC Current 30 mA
Power Dissipation 100 mW ⁽¹⁾

Notes:

- (1) Derate linearly 1.67 mW/ $^\circ\text{C}$ above 25°C .
- (2) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering.
- (3) All parameters tested using pulse technique.
- (4) Lead spacing is .220" or .320". Leads are 0.20" sq and .425" long (min).
- (5) Methanol or isopropanol are recommended cleaning agents. Plastic housing may be soluble in chlorinated hydrocarbons and ketones.



RoHS

Types OPB830L, OPB840L Series

Electrical Characteristics ($T_A = 25^\circ \text{C}$ unless otherwise noted)


SYMBOL	PARAMETER	MIN	MAX	UNITS	TEST CONDITIONS
Input Diode					
V_F	Forward Voltage		1.7	V	$I_F = 20 \text{ mA}$
I_R	Reverse Current		100	μA	$V_R = 2 \text{ V}$
Output Phototransistor					
$V_{(BR)ECO}$	Collector-Emitter Breakdown Voltage	30		V	$I_C = 1 \text{ mA}$
$V_{(BR)ECO}$	Emitter-Collector Breakdown Voltage	5.0		V	$I_E = 100 \text{ mA}$
I_{CEO}	Collector-Emitter Dark Current		100	nA	$V_{CE} = 10 \text{ V}$
Coupled					
$V_{CE(SAT)}$	Saturation Voltage Parameter A	OPB830L/OPB840L OPB835L/OPB845L	0.4	V	$I_C = 400 \mu\text{A}, I_F = 20 \text{ mA}$
	Parameter B	OPB831L/OPB841L OPB836L/OPB846L	0.4	V	$I_C = 800 \mu\text{A}, I_F = 10 \text{ mA}$
	Parameter C	OPB832L/OPB842L OPB837L/OPB847L	0.6	V	$I_C = 1800 \mu\text{A}, I_F = 20 \text{ mA}$
$I_{C(ON)}$	On-State Collector Current Parameter A	OPB830L/OPB840L OPB835L/OPB845L	500	μA	$V_{CE} = 10 \text{ V}, I_F = 20 \text{ mA}$
	Parameter B	OPB831L/OPB841L OPB836L/OPB846L	1000	μA	$V_{CE} = 5 \text{ V}, I_F = 10 \text{ mA}$
	Parameter C	OPB832L/OPB842L OPB837L/OPB847L	1800	μA	$V_{CE} = 0.6 \text{ V}, I_F = 20 \text{ mA}$

SLOTTED
OPTICAL
SWITCHES

Types OPB830L, OPB840L Series

PART NUMBER GUIDE

OPB 8 X X X X X

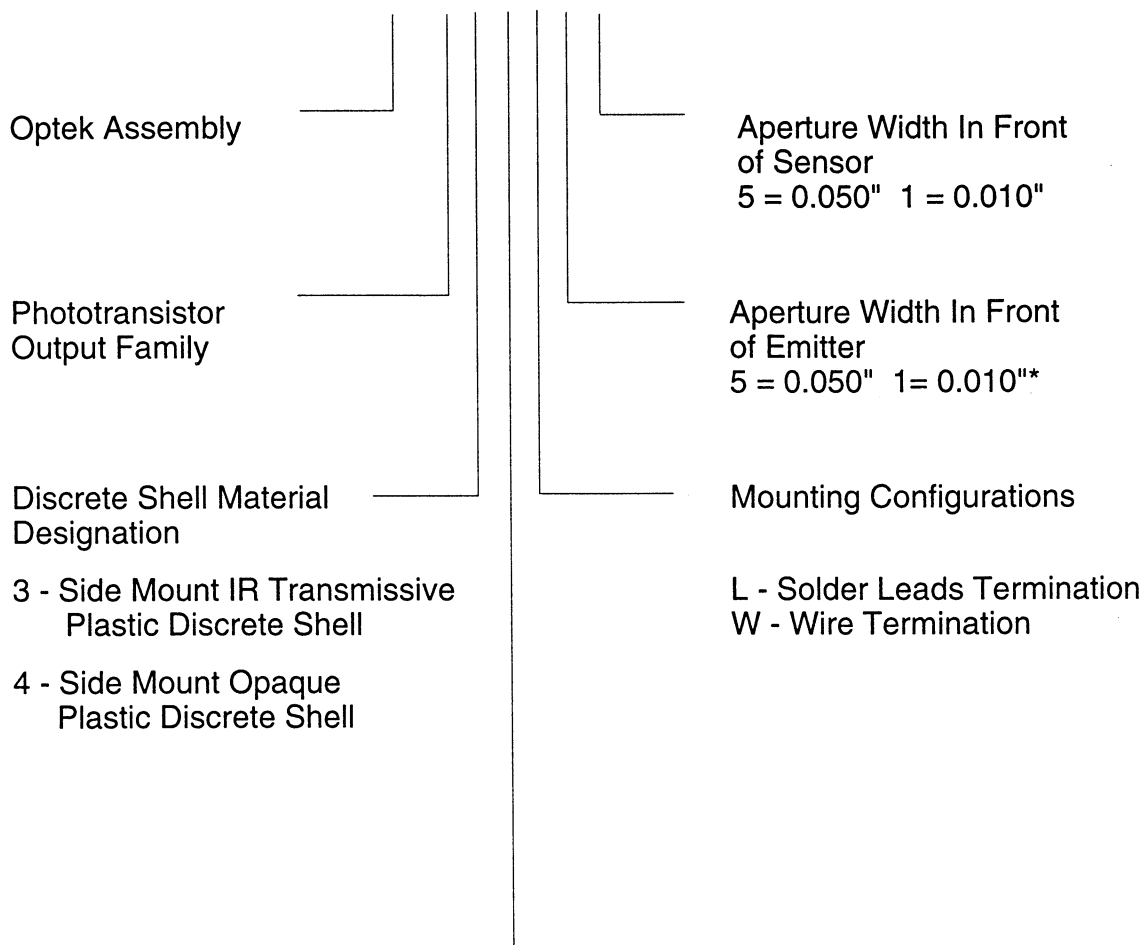

Electrical Specification Variations


- 0 - Electrical Parameter A, 0.320" Lead Spacing
- 1 - Electrical Parameter B, 0.320" Lead Spacing
- 2 - Electrical Parameter C, 0.320" Lead Spacing
- 5 - Electrical Parameter A, 0.220" Lead Spacing
- 6 - Electrical Parameter B, 0.220" Lead Spacing
- 7 - Electrical Parameter C, 0.220" Lead Spacing

*Assemblies with dual 0.010" apertures are currently available with electrical parameter "A" only.


Types OPB830L, OPB840L Series

Typical Performance Curves


Normalized Output Current
vs Forward Current

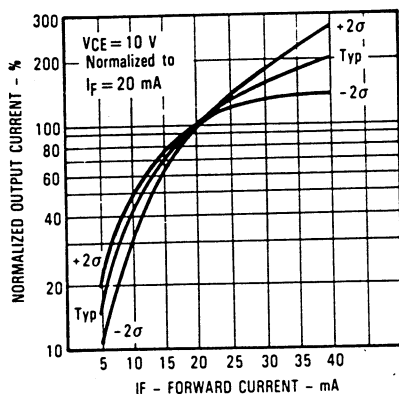


Normalized Output Current
vs Ambient Temperature

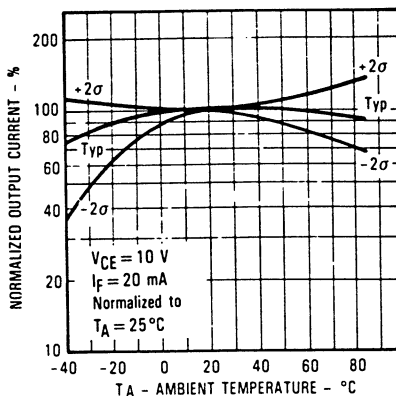


Forward Current
vs Forward Voltage Input Diode

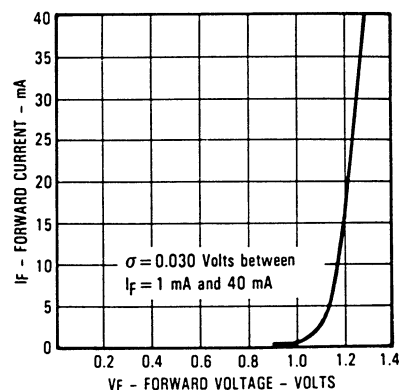


Relative Output Current
vs Time

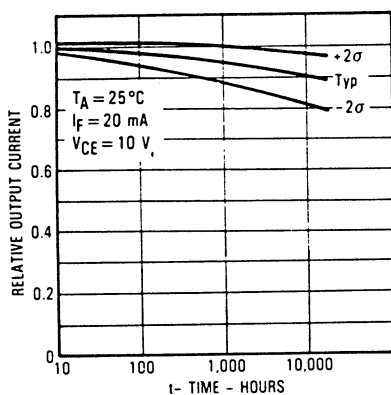


Collector Dark Current
vs Ambient Temperature

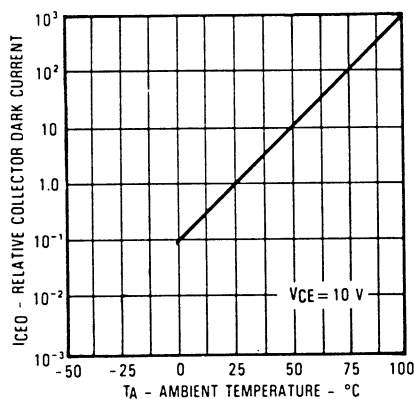


Rise and Fall Time
vs Load Resistance

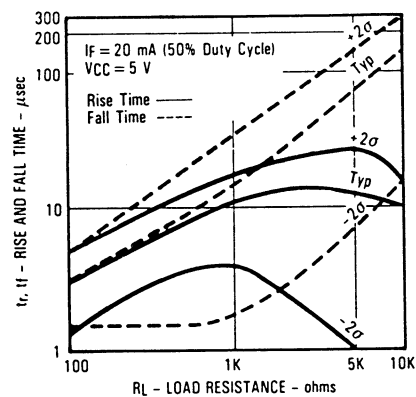


Reduction in Output Current Due to
LED Heating vs Forward Current

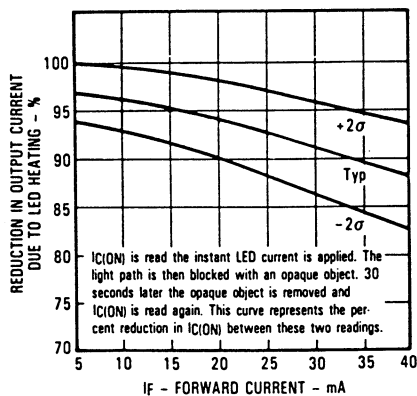

Normalized Output Current
vs Input Current

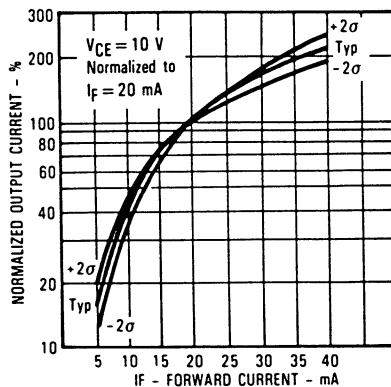

Rise and Fall Time
vs Load Resistance

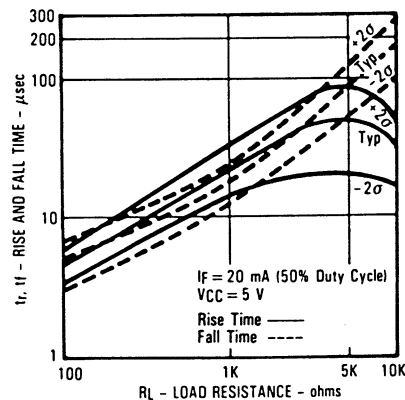

SLOTTED
OPTICAL
SWITCHES

All Part Numbers Ending in "1"

Optek reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Optek Technology, Inc.

1215 W. Crosby Road

Carrollton, Texas 75006

(972)323-2200

Fax (972)323-2396