Feb.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

HRS DRAWING FOR REFERENCE

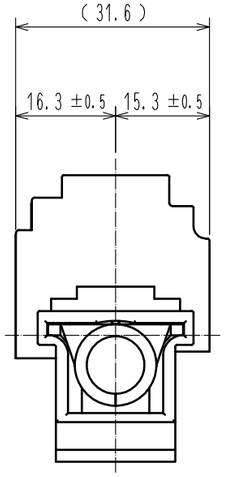

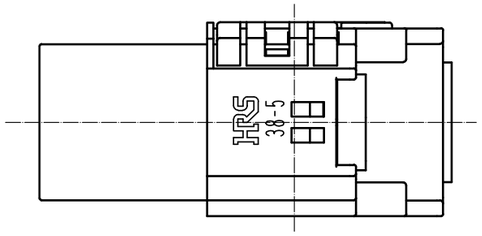

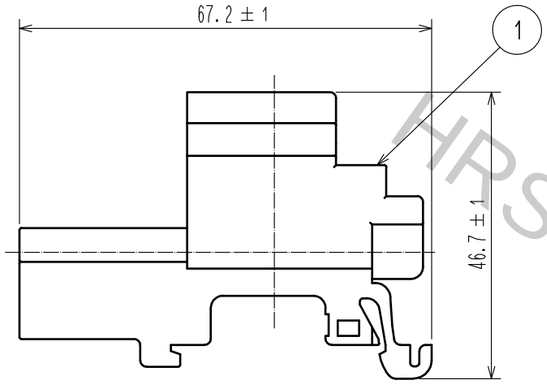

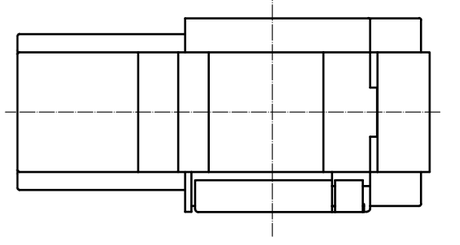

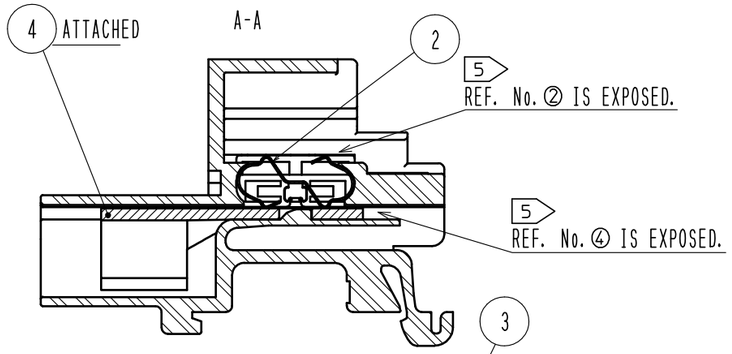

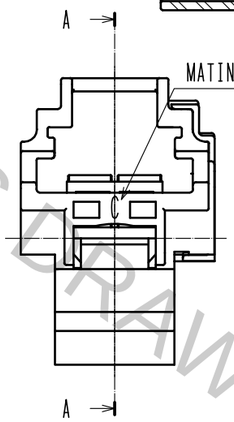

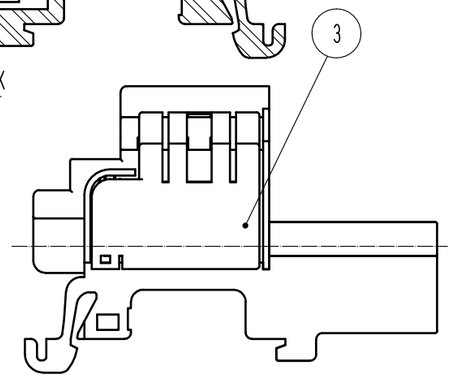

OBRIQUE DRAWING IN MATED CONDITION.

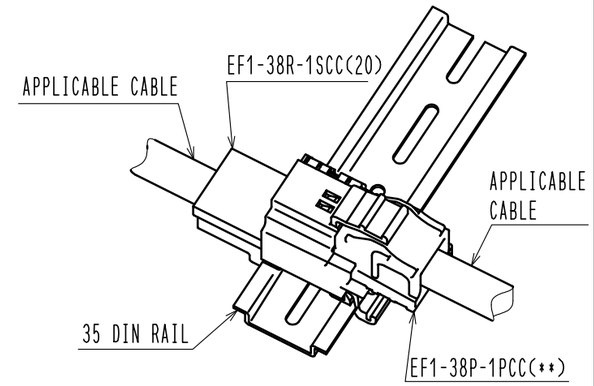

DIMENSION IN MATED CONDITION.

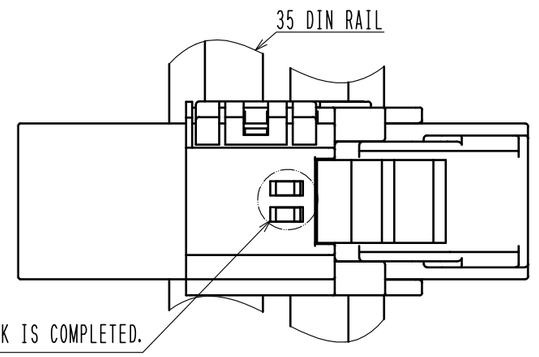

MAKE SURE THAT THE LOCK IS COMPLETED.

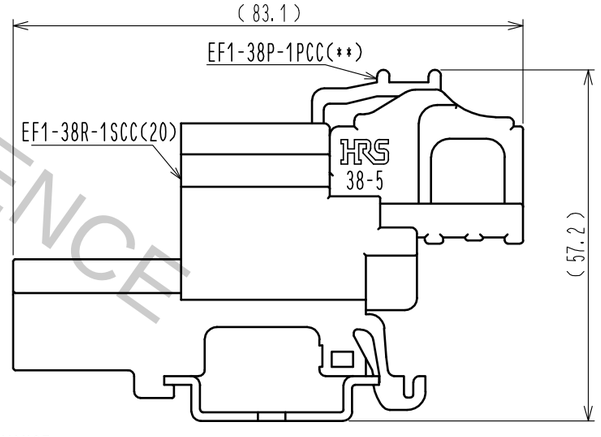

PARTS NO. ④

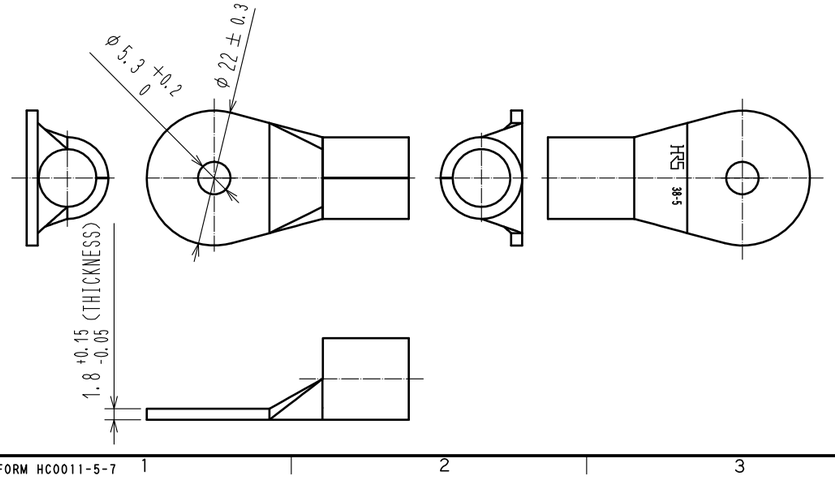

NOTES 1 APPLICABLE CRIMPING TOOL:
JIS C9711 IZUMISEIKI CO.,LTD. 9H-60 OR REC 150F.

⚠ WARNING 2 THE CONNECTOR IS NOT HOT PLUGABLE.

3 REFER TO ASSEMBLY PROCEDURE MANUAL (ETAD-C0294).

4 REFER TO HANDLING PROCEDURE MANUAL (ETAD-C0307).

⚠ WARNING 5 KEEP YOUR FINGERS AND OTHER CONDUCTORS FROM COMING IN CONTACT WITH REF. No.② AND ④ IN ELECTRICALLY CHARGED CONDITIONS IN ORDER TO AVOID ELECTRICAL SHOCK AND SHORT-CIRCUIT.

⚠ WARNING 6 MAKE SURE THAT THE CONNECTOR IS INSERTED TO THE END AND LOCKED WHEN MATED. CONFIRM THAT THE CONNECTOR IS NOT UNINTENTIONALLY RELEASED BY PULLING THE CABLE WITH LIGHT FORCE TO PREVENT INCOMPLETE MATING CONDITION.

7 CRIMP TERMINALS AS SHOWN BELOW ARE ALSO APPLICABLE.
NICHIFU CO.,LTD. R 38-5, JST CO.,LTD. 38-5.

ATTENTIONS PRIOR TO USE:
- DIMENSIONS SHALL SATISFY THAT OF IN REF. No. 4, AND NO DEFORMATION OR CONTAMINATION IS OBSERVED.
- CONTACT RESISTANCE MUST BE BELOW THE STANDARD VALUE.
- USE ONLY TIN PLATING TERMINAL.

⚠ WARNING - EVALUATE PRIOR TO USE, AS TIN PLATING CONDITION COULD AFFECT THE PERFORMANCE.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
2	COPPER ALLOY	OVER PLATING: TIN 1μm min. UNDER PLATING: NICKEL 1μm min.	4	COPPER ALLOY	TIN PLATING 1μm min.
1	PBT	UL94V-0 (BLACK)	3	PBT	UL94V-0 (BLACK)

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	1 : 1	0				

HIROSE ELECTRIC CO., LTD.

APPROVED	EJ. KUNII	15. 10. 07
CHECKED	EJ. KUNII	15. 10. 07
DESIGNED	TP. KOMATSU	15. 10. 07
DRAWN	SY. KONDO	15. 10. 07

DRAWING NO.	EDC-118253-20-00
PART NO.	EF1-38R-1SCC(20)
CODE NO.	CL142-0011-7-20

0 1/1