

MBR6020PT~MBR60100PT

60 AMPERES SCHOTTKY BARRIER RECTIFIERS

VOLTAGE 20 to 100 Volts **CURRENT** 60 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O. Flame Retardant Epoxy Molding Compound.
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency.
- High current capability
- Guardring for overvoltage protection
- For use in low voltage,high frequency inverters free wheeling , and polarity protection applications.
- Pb free product are available : 99% Sn above can meet Rohs environment substance directive request

MECHANICAL DATA

Case: TO-3P molded plastic


Terminals: solder plated, solderable per MIL-STD-750, Method 2026

Polarity: As marked.

Mounting Position: Any

Weight: 0.2 ounces, 5.6 grams.

TO-3P Unit: inch (mm)

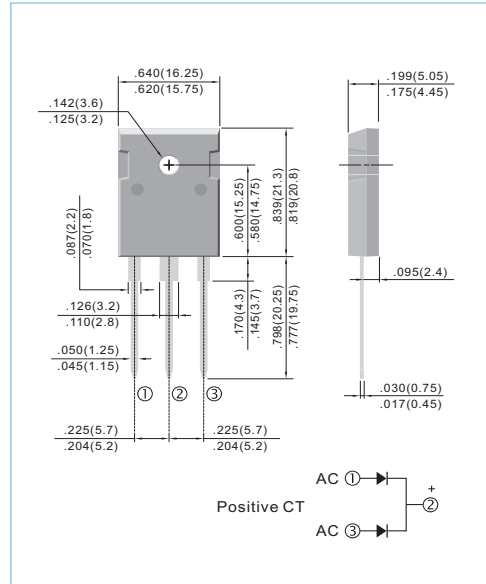

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

PARAMETER	SYMBOL	MBR6020PT	MBR6030PT	MBR6040PT	MBR6045PT	MBR6050PT	MBR6060PT	MBR6080PT	MBR60100PT	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	45	50	60	80	100	V
Maximum RMS Voltage	V _{RMS}	14	21	28	31.5	35	42	56	70	V
Maximum DC Blocking Voltage	V _{DC}	20	30	40	45	50	60	80	100	V
Maximum Average Forward Current (See fig.1)	I _{AV}	40								A
Peak Forward Surge Current :8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I _{FSM}	400								A
Maximum Forward Voltage at 30A, per leg	V _F	0.7				0.8				V
Maximum DC Reverse Current Tc=25 °C at Rated DC Blocking Voltage Tc=125°C	I _R	0.1 20								mA
Typical Thermal Resistance	RθJC	1.5								°C / W
Operating Junction Temperature Range	T _J	-50 TO + 150								°C
Storage Temperature Range	T _{STG}	-50 TO + 175								°C

Notes :

Both Bonding and Chip structure are available.

MBR6020PT~MBR60100PT

RATING AND CHARACTERISTIC CURVES

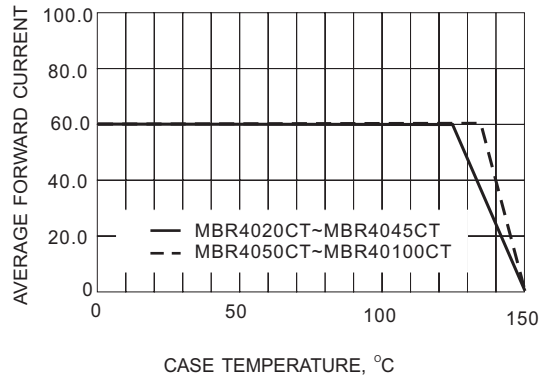


Fig.1- FORWARD CURRENT DERATING CURVE

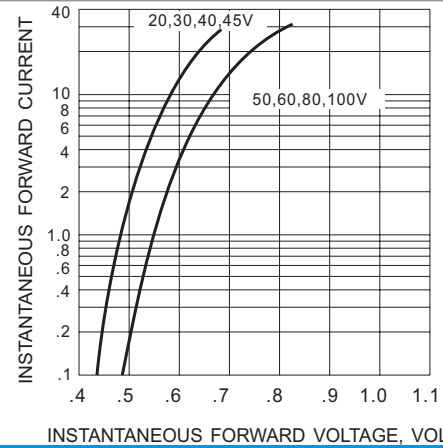


Fig.2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

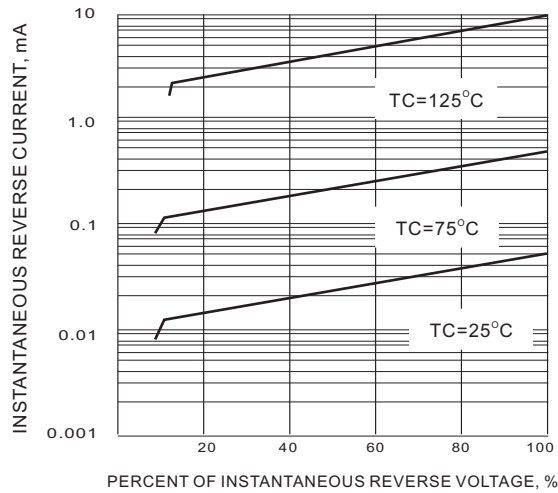


Fig.3- TYPICAL REVERSE CHARACTERISTICS

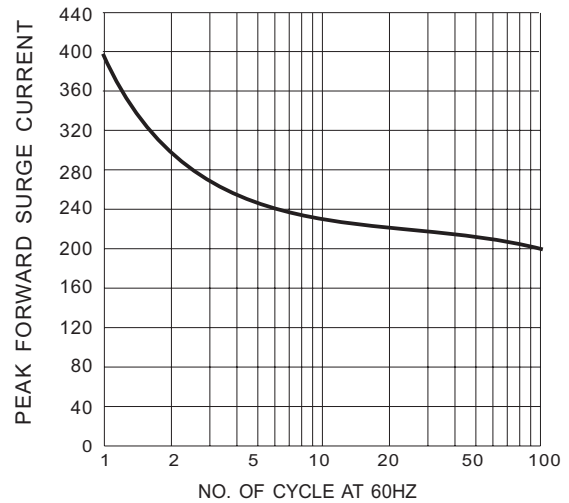


Fig.4- MAXIMUM NON-REPETITIVE SURGE CURRENT