





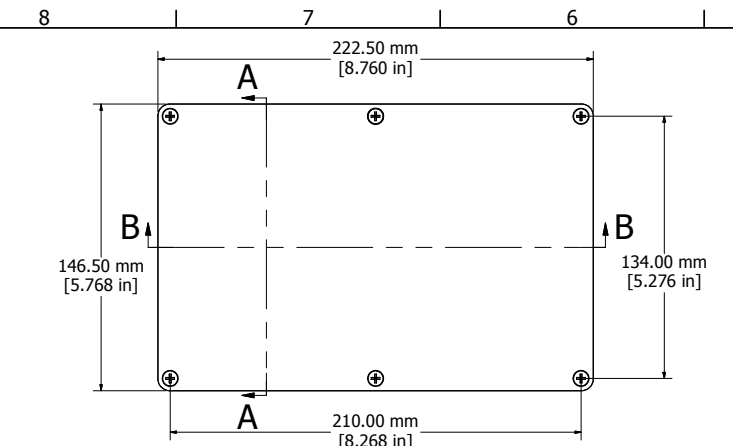


ASSEMBLY

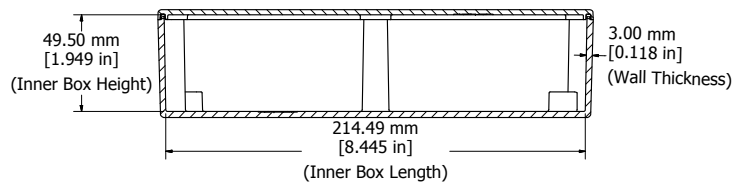


SECTION B-B  
Side View of Assembly

SECTION A-A  
End View of Assembly

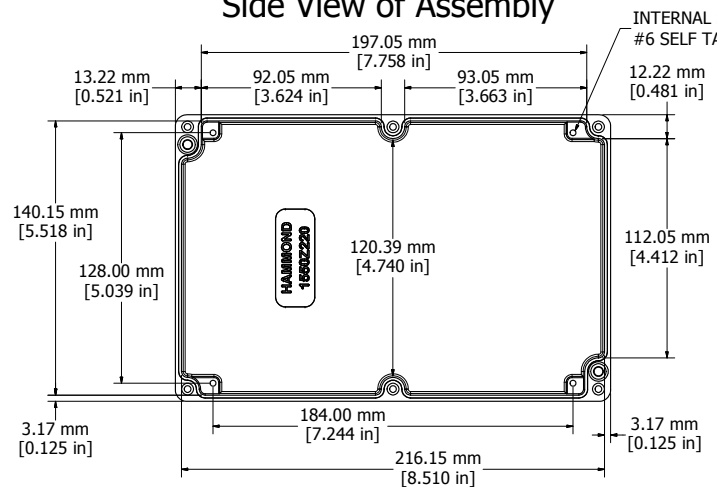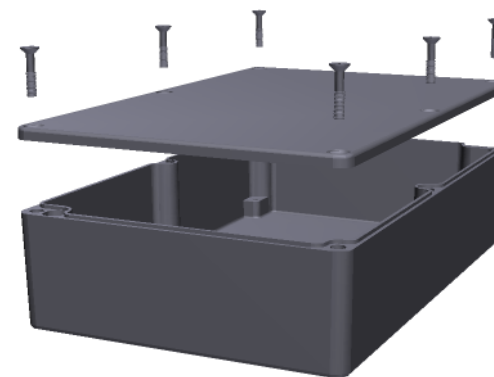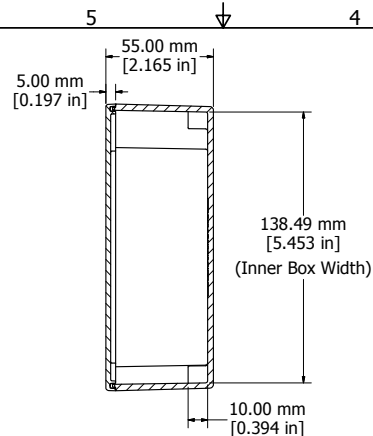

Top View Looking Inside Box

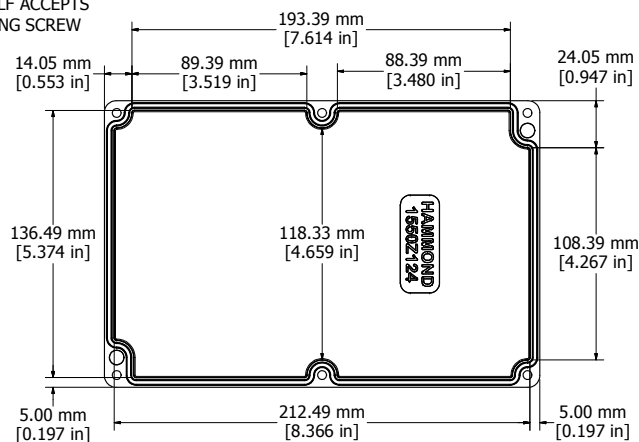

View Looking Inside Lid

UL US LISTED  
File #E71073  
NEMA 4, 4X

Enclosures can be Factory Modified ( Milling, Drilling, Printing etc. )  
Contact Factory [mjm@hammondmgf.com](mailto:mjm@hammondmgf.com) for quotes  
Solid models of this enclosure available in STEP or IGES.

NOTES

Purchased assembly includes enclosure, M4x20 lid screws and  
Pre-formed Silicone Gasket  
Cover screws should be torqued to 5-7.5 lbf.in (50-75 cN.m)

1550Z124

PART NUMBERS

|                          |            |
|--------------------------|------------|
| Natural Finish Enclosure | 1550Z124   |
| Black Textured Enclosure | 1550Z124BK |

**HAMMOND**  
MANUFACTURING™

1550Z124

[www.hammondmgf.com](http://www.hammondmgf.com)