




Copyright © 2008 by ANSMANN Holding GmbH, D-72636 Heimenkirch, Germany. All rights reserved. This document is a technical drawing and may not be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of ANSMANN Holding GmbH. The information in this document is subject to change without notice. The information in this document is not intended to be used in any way that may constitute an infringement of any patent or other intellectual property rights. The information in this document is not intended to be used in any way that may constitute an infringement of any patent or other intellectual property rights. The information in this document is not intended to be used in any way that may constitute an infringement of any patent or other intellectual property rights.

Bedruckung auf Gehäuseoberteil M2:1/
printing on top case Scale 2:1

ANSMANN
AC/DC Adaptor for
Medical Applications
PRI: 100V-240V~ 50/60Hz.xmA
SEC: 9V= 400mA 3.6VA
Art.-Nr.: 8194048

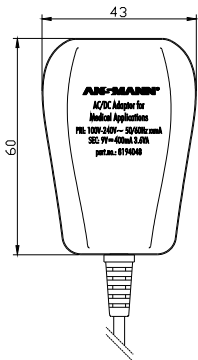

Bedruckung auf Gehäuseunterteil M2:1/
printing on bottom case Scale 2:1

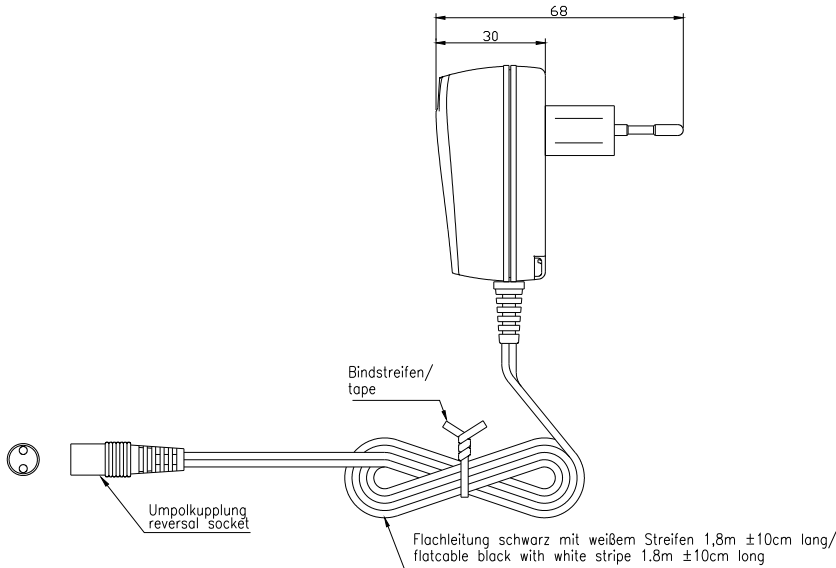

Technische Daten/
technical data
Eingangsspannung/
input voltage
Eingangs-Schutz/
primary electrical protection
Leistungsaufnahme im Leerlauf/
stand-by power consumption
Nenn-Leistungsaufnahme/
nominal power consumption
Ausgangsspannung im Leerlauf/
no load output voltage
Ausgangsspannung/
output voltage
Brummspannung/
ripple voltage
Nenn-Ausgangsstrom/
nominal output current
Ausgangs-Schutz/
secondary electrical protection
Spannungsfestigkeit/
electric strength
Schutzklasse/
protection class
Betriebstemperatur/
operating temperature
Lagertemperatur/
storage temperature

: Steckernetzgerät/
plug-in power supply
: 100-240VAC ±10% / 50/60Hz
switch-mode
: Classisicherung T0.5A/
glass fuse T0.5A
: < 0.3W
: ca./ approx. 5W
: max. 9.5VDC
: 9VDC ±5%
regulated
: < 300mV
: 400mA
: ---
: 4 kV Eingang/Ausgang
primary/secondary
: II

: 0°C...+40°C
: -25°C...+70°C

Gewicht/
weight
Gehäuse/
case
Gehäusematerial/
case material
Leiterplattenmaterial/
pcb material
Schutzart/
case protection
Typenschild Vorderseite/
ratingplate front
Typenschild Rückseite/
ratingplate back
Verpackung/
packaging
Anleitungen/
instructions
Approbationen/
approvals
Normen/
standards
Betriebsanzeige/
operating indicator

: xxxg inkl. Verpackung und Zubehör/
xxxg incl. packaging and accessories
: Steckergehäuse, schwarz, Typ 41/
plug-in housing, black, type 41
: UL94-V0
: CEM1
: IP 20
: weiße Bedruckung/
white printing
: weiße Bedruckung/
white printing
: Einzelverpackung weiße Faltschachtel, ca. 68x41x73mm (LxBxH) - VE: 30 Stück/
individual package, white folding box, approx. 68x41x73mm (LxBxH) - PU: 30 pcs.
: ---
: CE, BUREAU VERITAS mark, conform EN 60601
: IEC/EN61558, IEC/EN 60601-1, IEC/EN 60601-1-2
: ---

Verwendungsbereich/Application range für Anfrage/for inquiry AN7708		Zul. Abweichung/ Allowable deviation	Oberfläche/ Surface	Maßstab/Scale 1:1	Gewicht/Weight
				Werkstoff/Work material, Modell-Nr. ---	
		2008	Datum/Date Name	Zeichnungsname/Drawing name	
		18.08.	JE	Steckernetzgerät/ 9V 400mA plug-in power supply	
					Zeichnungsnummer/Drawing number Artikelnummer/Part number
					8194048
					Blatt/ Sheet
					1
Version		A	--- 18.08.08 JE	Ursprung/Origin Proj. GEN-0099-08-DE	Ersatz für/Replaced by
Änderung/Change					
Datum/Date Name					
Ursprung/Origin Proj.					
Ersatz für/Replaced by					
Ersatz durch/Replacement through					