

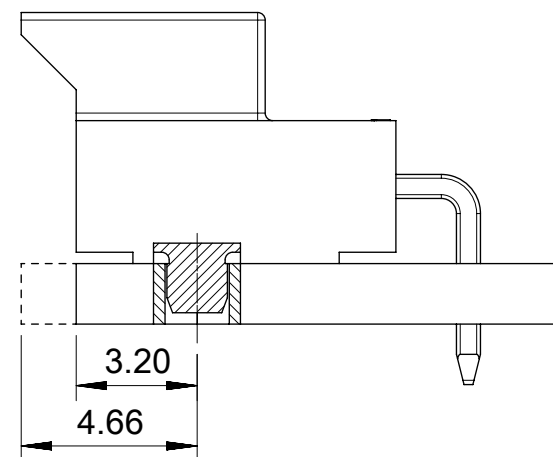
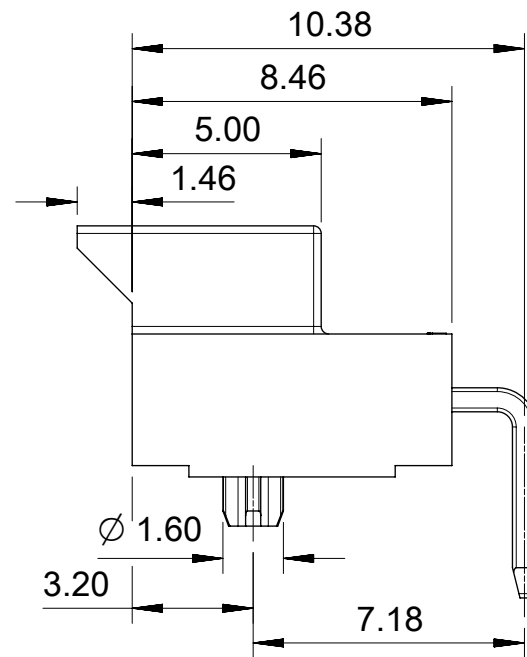
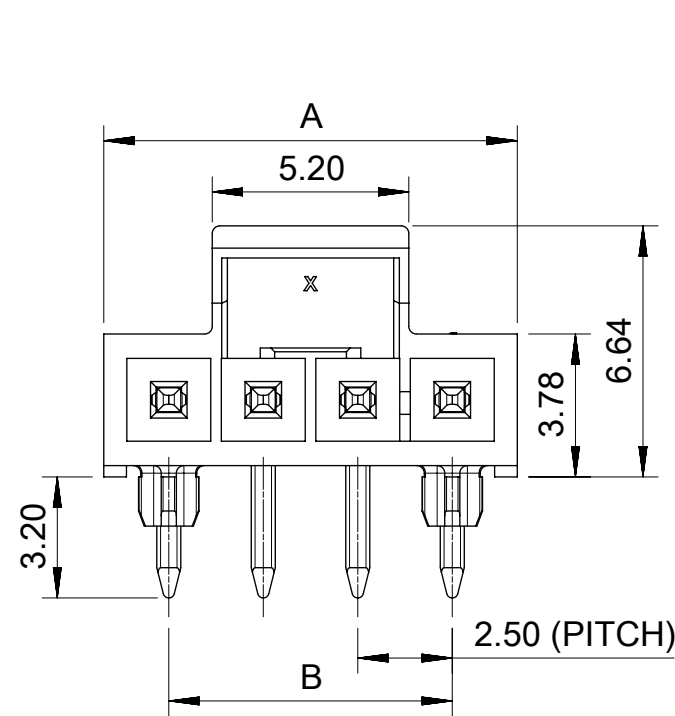
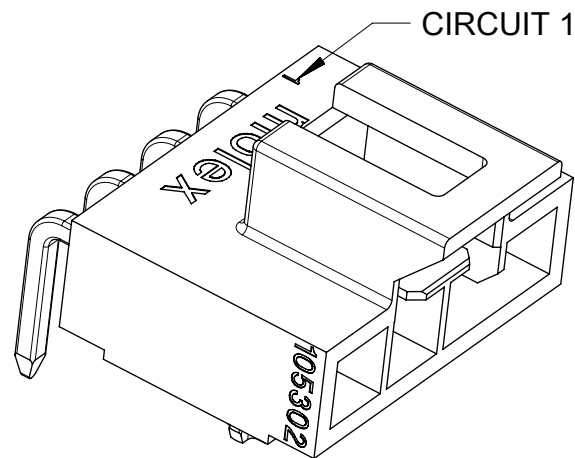


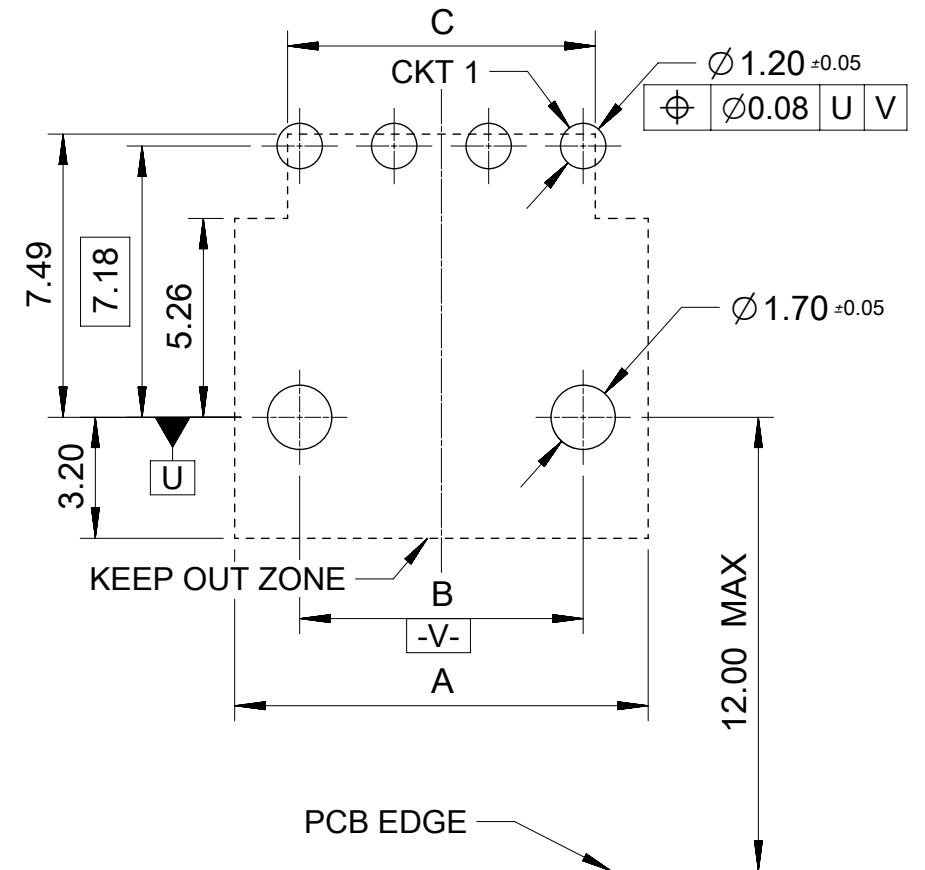

OPTION 1: LATCH FLUSH WITH PCB EDGE.
OPTION 2: HOUSING BODY FLUSH WITH PCB EDGE.



RECOMMENDED PCB(CONNECTOR SIDE VIEW)
THICKNESS=1.6 TO 2.4 MM.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																
QUALITY SYMBOLS	2017/03/29 2017/05/15 EC NO: 115635 DRWN: GLLI CHK'D: AYIN APPR: AYIN REV	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 3.0 ° 4 PLACES ± 3 PLACES ± 0.1 2 PLACES ± 0.2 1 PLACE ± 0.3 0 PLACES ± DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION UNITS		SCALE		molex® HEADER OF NANO-FIT, S/R, R/A POWER CONNECTOR PRODUCT CUSTOMER DRAWING									
			MM		5:1											
			DRWN BY				DATE									
			GLLI				2014/07/16									
			CHK'D BY				DATE									
			APP'R BY				DATE									
			AYIN				2015/04/08		SERIES		MATERIAL NUMBER		CUSTOMER			
			DRAWING SIZE				THIRD ANGLE PROJECTION		105313		SEE SHEET 2		GENERAL MARKET			
			A3						DOCUMENT NUMBER		DOC TYPE		DOC PART		SHEET NUMBER	
									SD-105313-100		PSD		000		1 OF 3	

[illegible]