




Product Description

RFMD's SXA-389B amplifier is a high efficiency GaAs Heterojunction Bipolar Transistor (HBT) MMIC housed in low-cost surface mountable plastic package. These HBT MMICs are fabricated using molecular beam epitaxial growth technology which produces reliable and consistent performance from wafer to wafer and lot to lot. These amplifiers are specially designed for use as driver devices for infrastructure equipment in the 400 MHz to 2500 MHz cellular, ISM, WLL, PCS, WCDMA applications. Its high linearity makes it an ideal choice for multi-carrier as well as digital applications.

Optimum Technology Matching® Applied

- ☒ GaAs HBT
- ☐ GaAs MESFET
- ☐ InGaP HBT
- ☐ SiGe BiCMOS
- ☐ Si BiCMOS
- ☐ SiGe HBT
- ☐ GaAs pHEMT
- ☐ Si CMOS
- ☐ Si BJT
- ☐ GaN HEMT
- ☐ InP HBT
- ☐ RF MEMS
- ☐ LDMOS

Typical OIP₃, P1dB, Gain

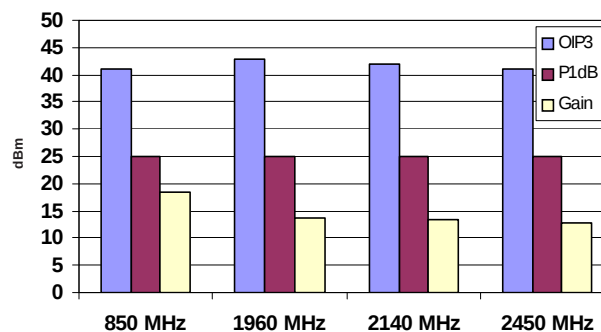

Features

- Available in RFMD Green, RoHS Compliant, and Pb-Free (Z Part Number)
- Lower R_{TH} for increased MTTF
10⁸ Hours at T_{Lead}=85°C
- On-Chip Active Bias Control, Single 5V Supply
- Excellent Linearity: +43 dBm Typ. OIP₃ at 1960 MHz
- High P_{1dB} : +25 dBm Typ.
- High Gain: +18.5 dB at 850 MHz
- Efficient: Consumes Only 575 mW

Applications

- W-CDMA, PCS, Cellular Systems
- Multi-Carrier Applications

Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
Small Signal Gain		18.4		dB	850 MHz
		13.6		dB	1960 MHz
	12.5	13.5	15.0	dB	2140 MHz
		12.8		dB	2450 MHz
Output Power at 1dB Compression		25.0		dBm	850 MHz
		25.0		dBm	1960 MHz
	24.0	25.0		dBm	2140 MHz
		25.0		dBm	2450 MHz
Output Third Order Intercept Point		41.0		dBm	850 MHz, P _{OUT} per tone = +11 dBm, Tone Spacing = 1 MHz
		43.0		dBm	1960 MHz
	39.0	42.0		dBm	2140 MHz
		41.0		dBm	2450 MHz
Noise Figure		4.5		dB	850 MHz
		4.8	6.3	dB	1960 MHz
		5.0		dB	2140 MHz
		5.7		dB	2450 MHz
Input VSWR		1.2:1			850 MHz
		1.3:1	2.0:1		1960 MHz
		1.2:1			2140 MHz
		1.2:1			2450 MHz
Operating Dissipated Power		575.0		mW	
Device Operating Current	90	115	135	mA	V _{CC} = 5V
Thermal Resistance		70		°C/W	junction to backside

Absolute Maximum Ratings

Parameter	Rating	Unit
Max Device Current (I _D)	240	mA
Max Device Voltage (V _{CC})	6	V
Max RF Input Power	100	mW
Max Dissipated Power	1500	mW
Max Junction Temperature (T _J)	165	°C
Operating Temperature Range (T _L)	-40 to + 85	°C
Max Storage Temperature	150	°C
ESD Rating - Human Body Model (HBM)	Class 1C	
Moisture Sensitivity Level	MSL 2	

Operation of this device beyond any one of these limits may cause permanent damage. For reliable continuous operation, the device voltage and current must not exceed the maximum operating values specified in the table on page one. Bias Conditions should also satisfy the following expression:
 $I_D V_D < (T_J - T_L) / R_{TH, j-l}$


 **Caution!** ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.







RoHS status based on EU Directive 2002/95/EC (at time of this document revision).

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.







Recommended Mounting Configuration for Optimum RF and Thermal Performance

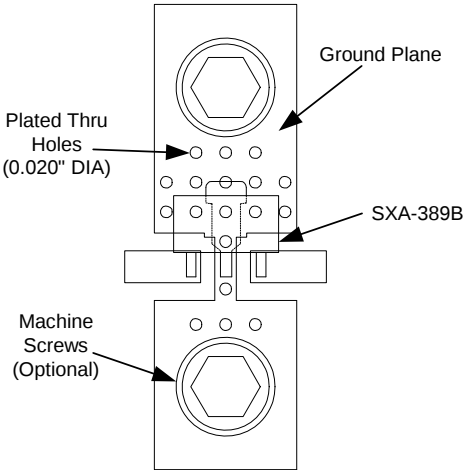







850MHz Application Circuit Data, $V_{CC}=5V$, $I_D=115mA$ (Tuned for Output IP3)

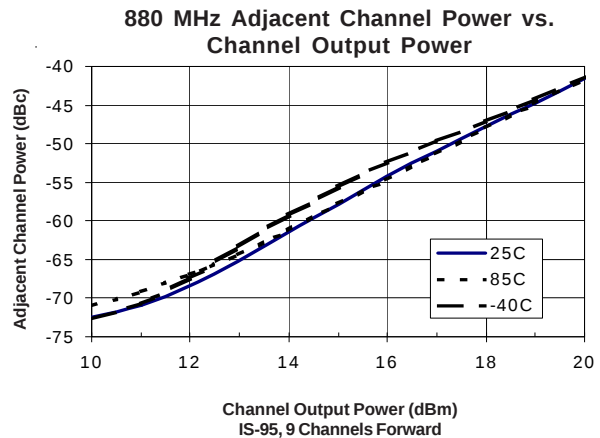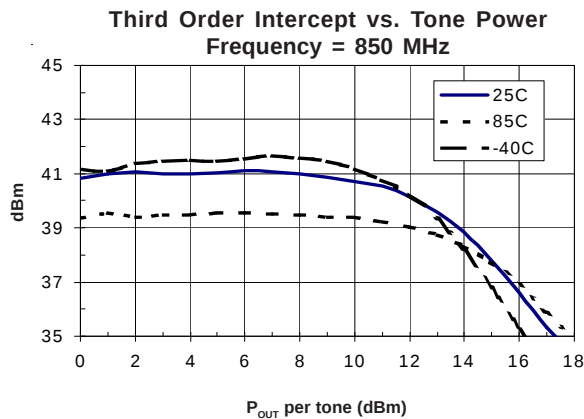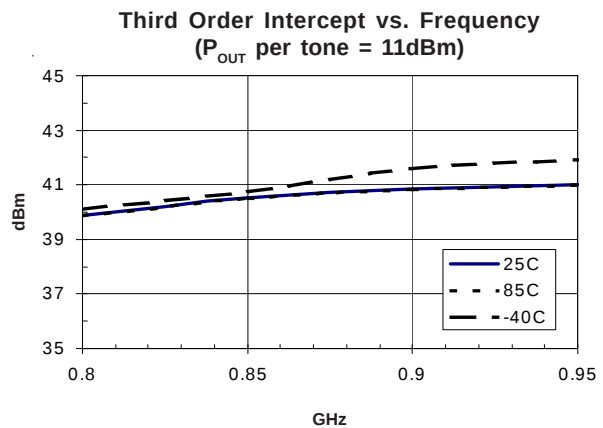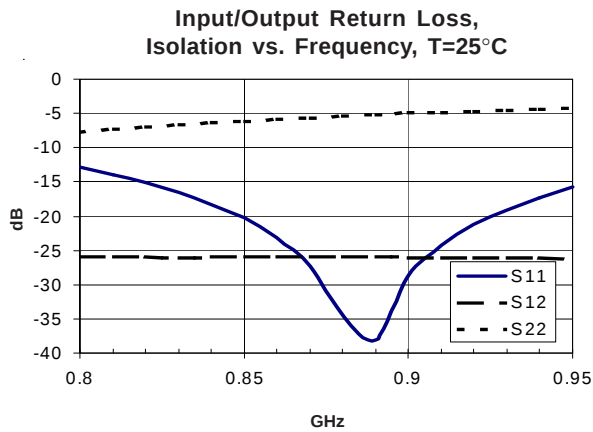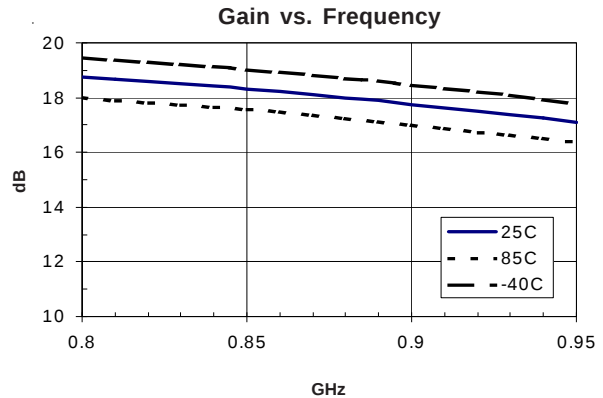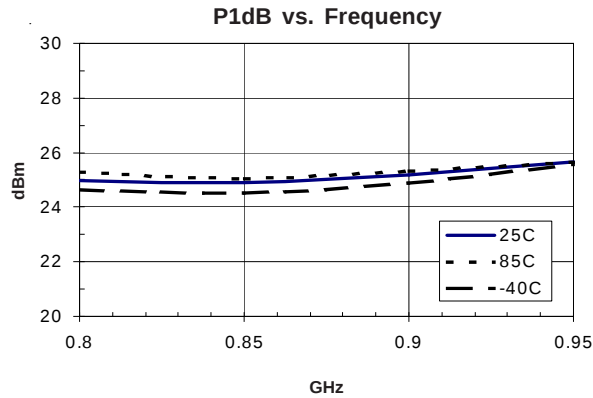






1960MHz Application Circuit Data, $V_{CC}=5V$, $I_D=115mA$ (Tuned for Output IP3)

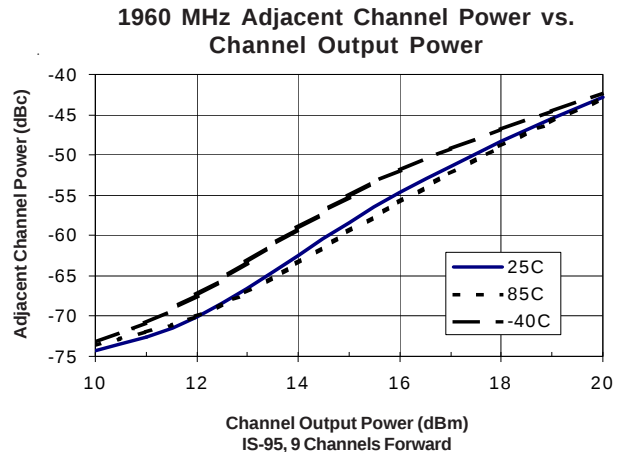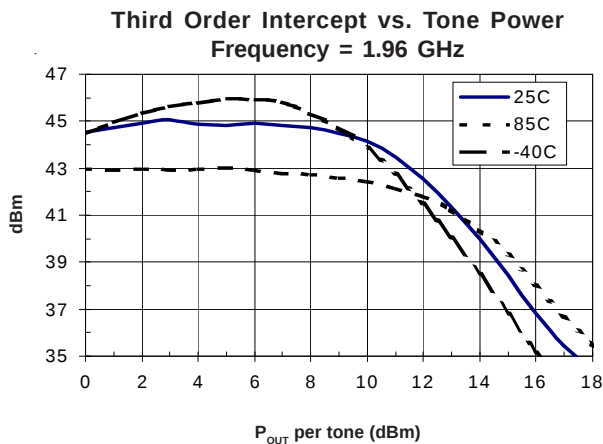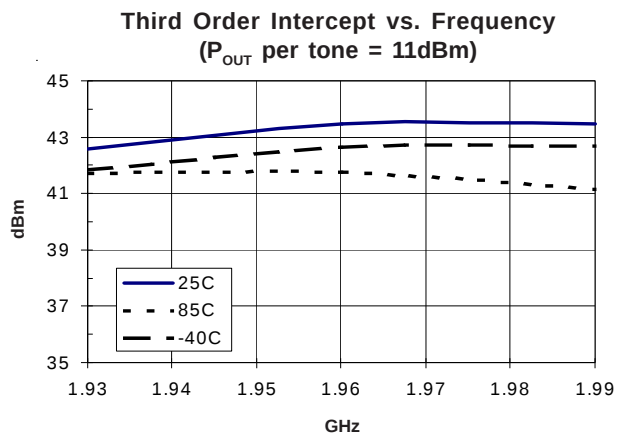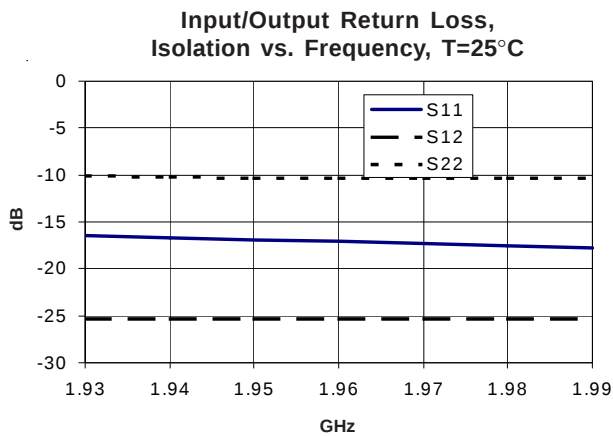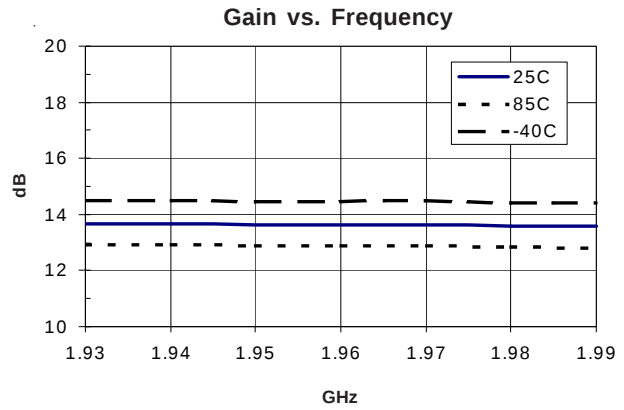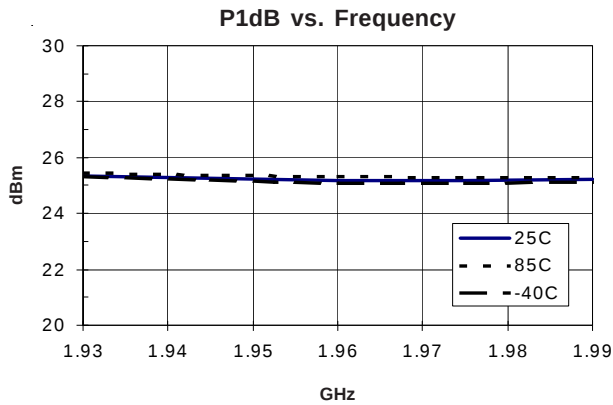

2140MHz Application Circuit Data, $V_{CC}=5V$, $I_D=115mA$ (Tuned for Output IP3)

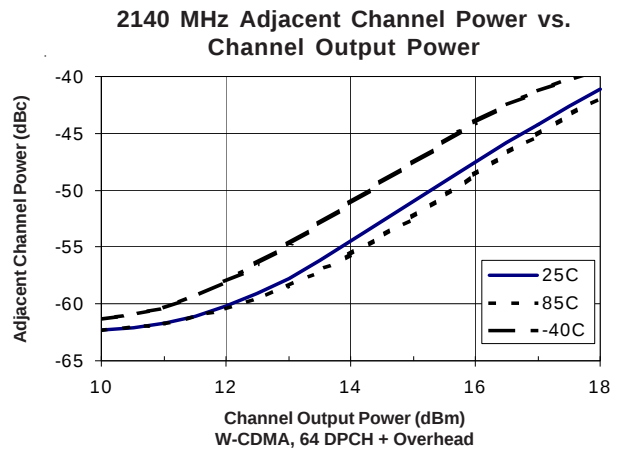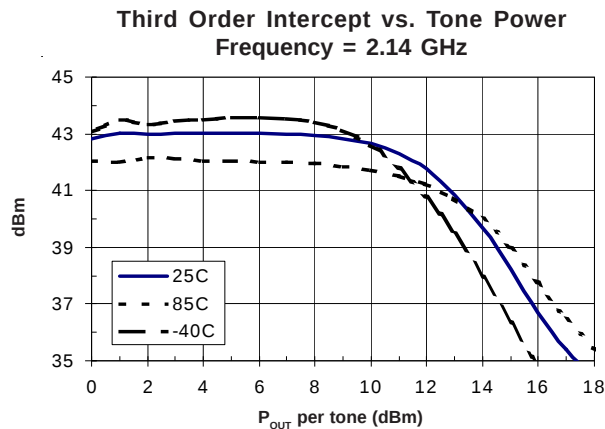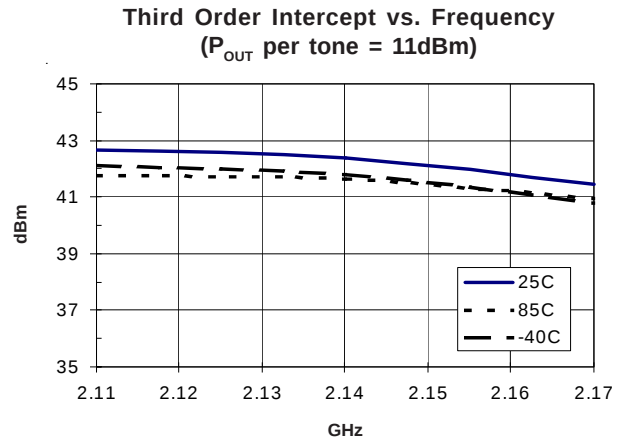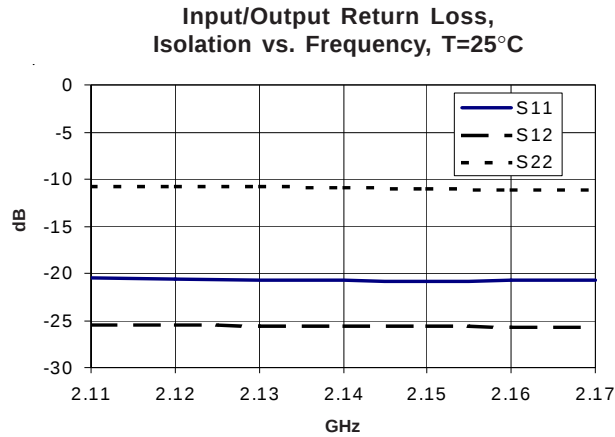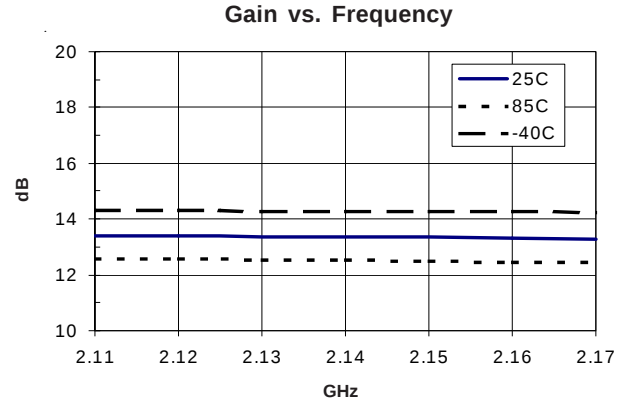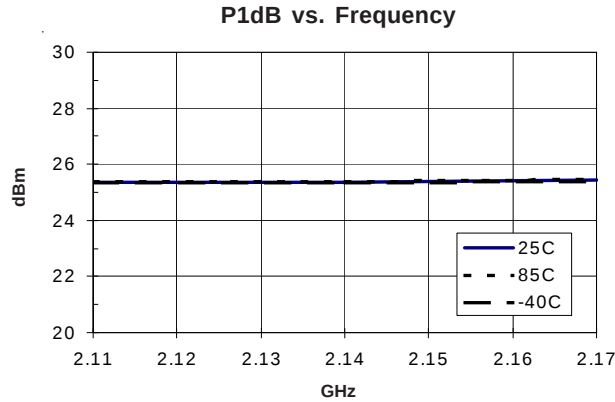


2450MHz Application Circuit Data, $V_{CC}=5V$, $I_D=115mA$ (Tuned for Output IP3)

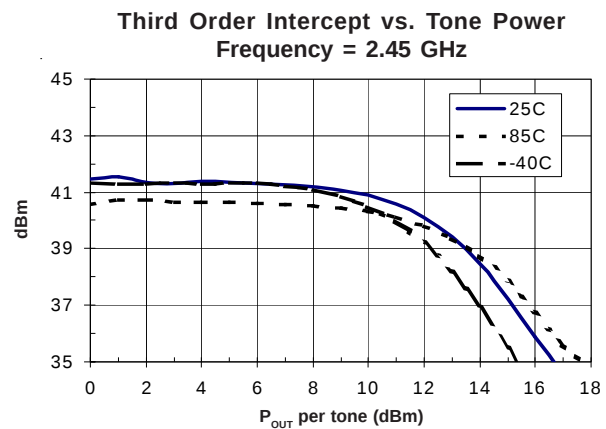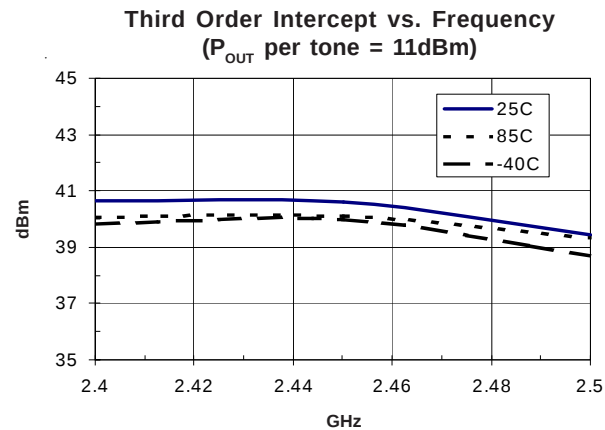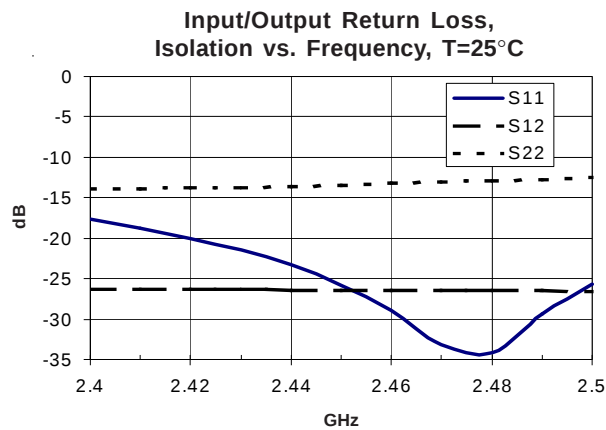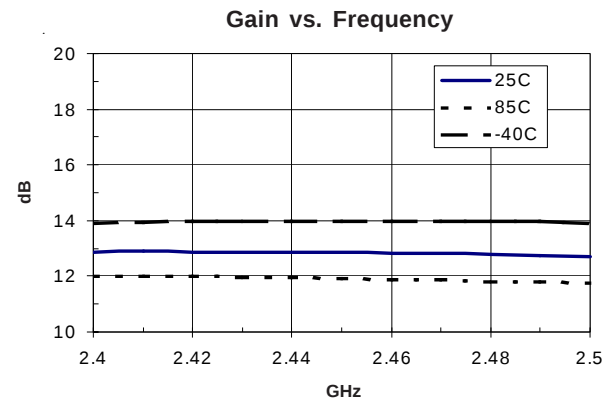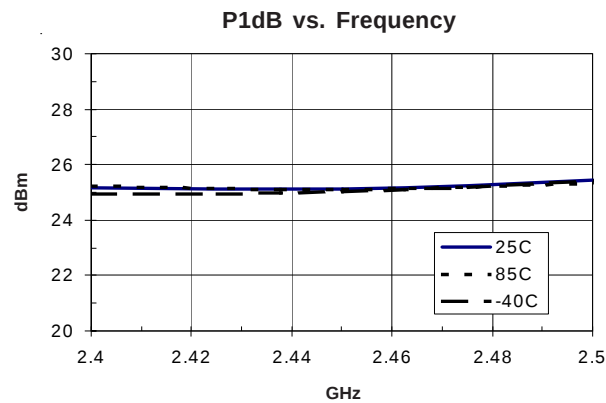

Pin	Function	Description
1	Base	Base pin
2	GND and Emitter	Connection to ground. Use via holes to reduce lead inductance. Place via holes as close to ground leads as possible.
3	Collector	Collector pin
4	GND and Emitter	Connection to ground. Use via holes to reduce lead inductance. Place via holes as close to ground leads as possible.


Suggested Pad Layout

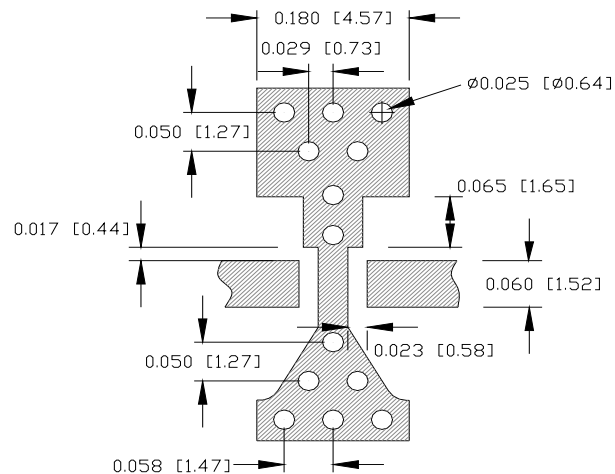

Package Drawing


Dimensions in inches (millimeters)

Refer to drawing posted at www.rfmd.com for tolerances.

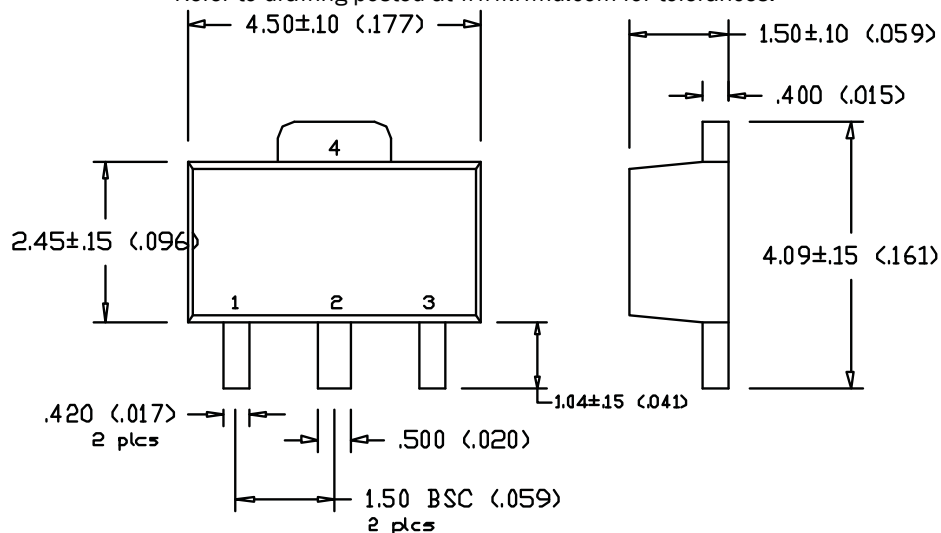


850MHz Application Schematic

Application Schematic for 850 MHz, 2450 MHz

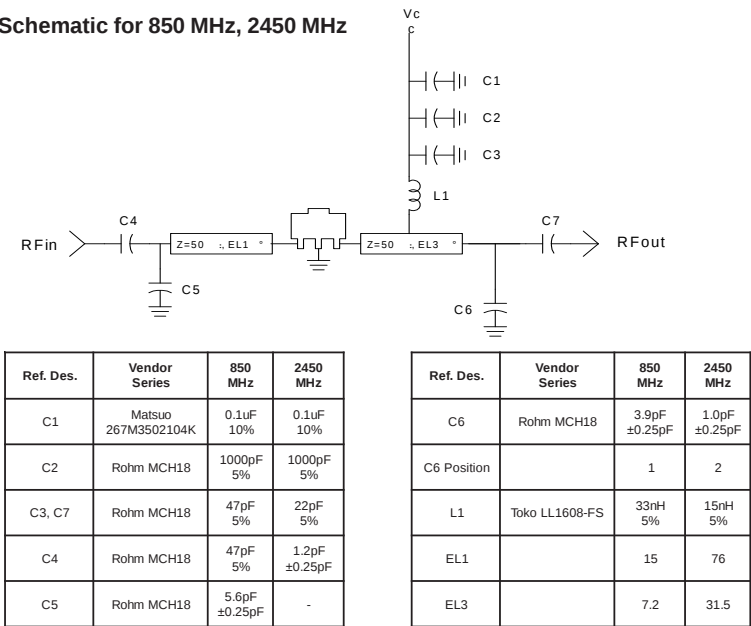


850MHz Evaluation Board Layout

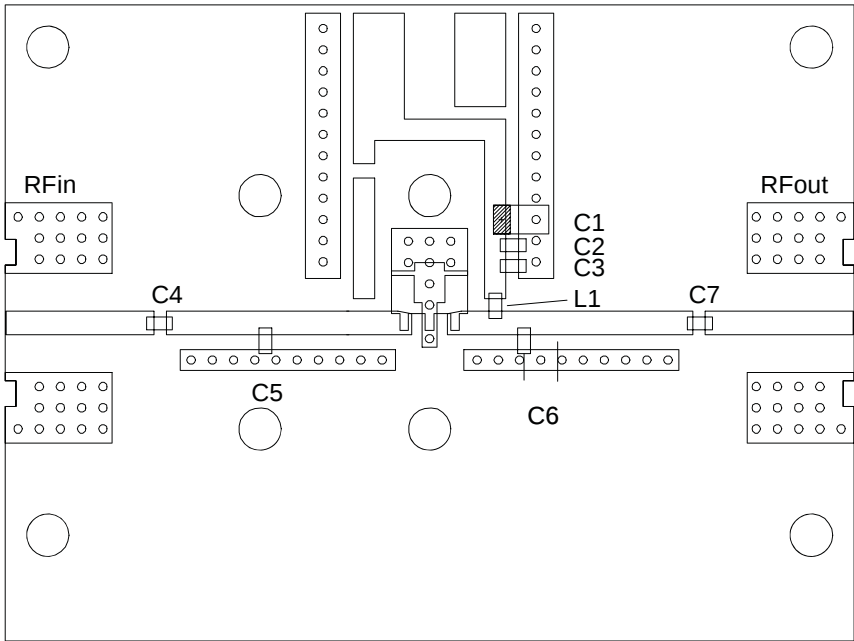

1960MHz and 2140MHz Application Schematic


Application Schematic for 1960 MHz, 2140 MHz

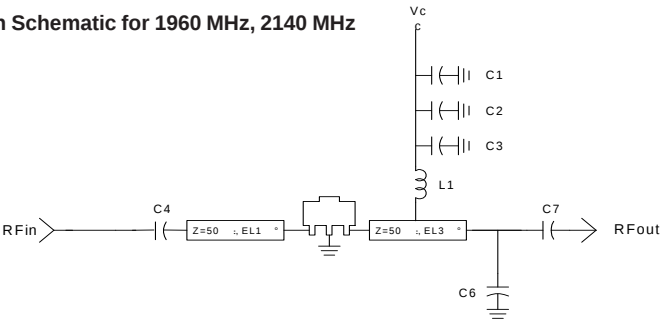


Ref. Des.	Vendor Series	1960/2140 MHz
C1	Matsuo 267M3502104K	0.1uF 10%
C2	Rohm MCH18	1000pF 5%
C3, C7	Rohm MCH18	22pF 5%
C4	Rohm MCH18	2.2pF ±0.25pF
C5	Rohm MCH18	-

Ref. Des.	Vendor Series	1960/2140 MHz
C6	Rohm MCH18	1.0pF ±0.25pF
L1	Toko LL1608-FS	18nH 5%
EL1		35
EL3		30

1960MHz and 2140MHz Evaluation Board Layout

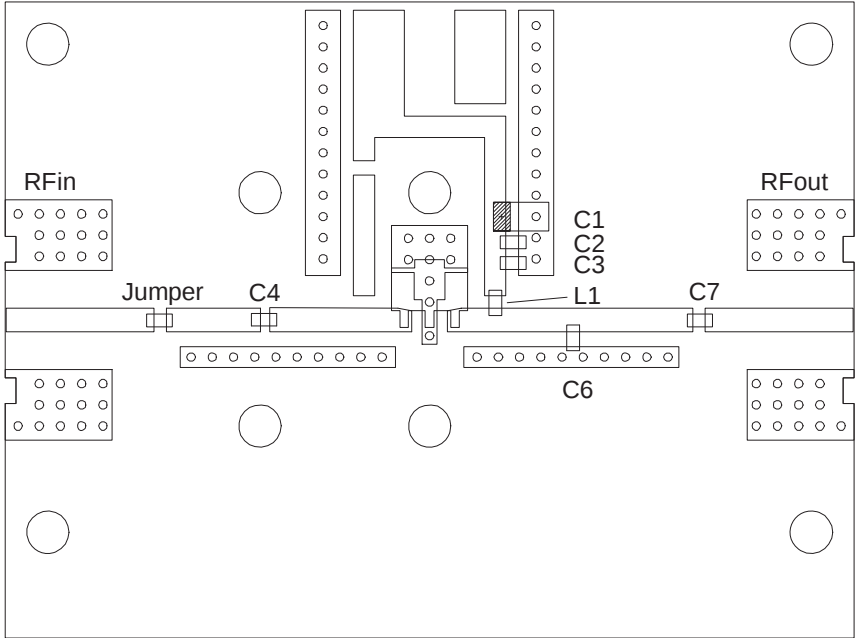

Part Identification

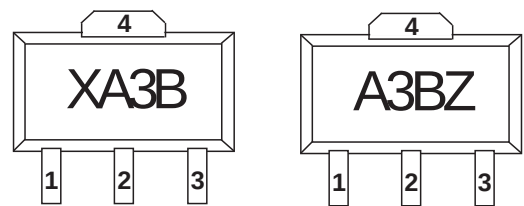

Alternate marking “SXA389BZ” or “SXA389B” on line one with Trace Code on line two.

Ordering Information

Part Number	Description	Devices/Container
SXA-389BZSB		5 Piece Sample Bag
SXA-389BZSQ		25 Piece Sample Bag
SXA-389BZSR		100 Piece 7" Sample Reel
SXA-389BZ		1000 Piece 7" Sample Reel
SXA-389BZPCK1	850MHz PCBA	Evaluation Board and 5 Piece Sample Bag
SXA-389BZPCK2	1960MHz PCBA	Evaluation Board and 5 Piece Sample Bag