

3.16
(80.3)


0.50 REF
(12.7)

1.00
(25.4)

0.69 REF
(17.5)

REF

.14 (3.5) DIA. THRU
.31 (7.8) DIA. C'BORE
x .11 (2.8) DP.

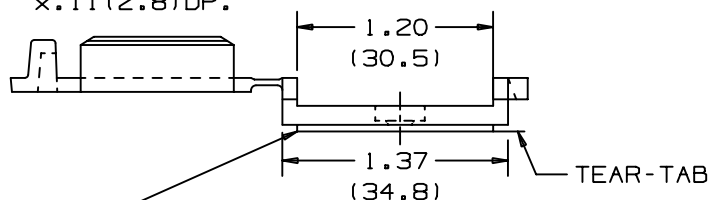


ADHESIVE TAPE: PRESSURE SENSITIVE FOAM
0.040 (1.02) THICK WITH RUBBER ADHESIVE
AND PROTECTIVE LINER. MOUNT IS DESIGNED
TO SUPPORT 0.62 lbs. (281g) MAXIMUM
WEIGHT ON A CLEAN, DRY, SMOOTH, GREASE-FREE
SURFACE.

1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
2. TO APPLY MOUNT: a) REMOVE PROTECTIVE LINER; b) PLACE IN DESIRED LOCATION; c) APPLY PRESSURE TO TOP OF MOUNT.

PANDUIT PART No.	REC'M. SCREW FASTENER	WEIGHT lbs. (g)/100PCS.
FCM1.2-A	N/A	0.96 (436)
FCM1.2-S6	#6(M3) FL.HD. OR BUTTON HD.	0.91 (413)

NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE. AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE MOUNTS MAY BE APPLIED AND/OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

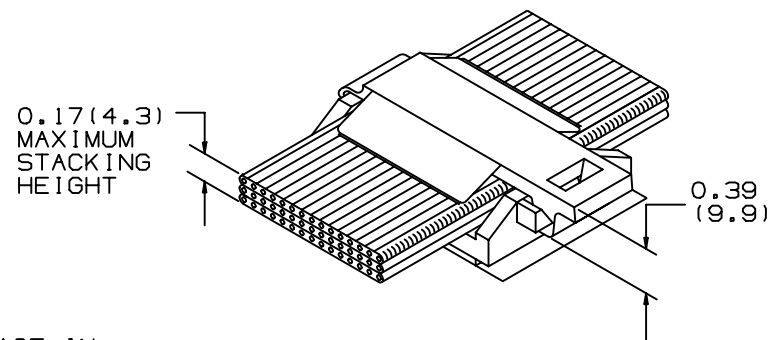

											PANDUIT CORP. TINLEY PARK, ILLINOIS					
											1.2 INCH FLAT CABLE MOUNT FCM1.2					
											UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± NA (.XXX) ± NA (.XX) ± 0.020(.5) ANGLES ± NA		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.			
											DRAWN BY LGG	MAT'L: NYLON 6/6		SCALE FULL		
R	6/22/01	LGG		INITIAL RELEASE REPLACED SS-19058		GB02391F	R				DATE 6/22/01			DRAWING NO. GB02391F		DWG A
REV	DATE	BY	CHK	DESCRIPTION		ECN - R	CUST	SUP			CHK'D					SIZ