
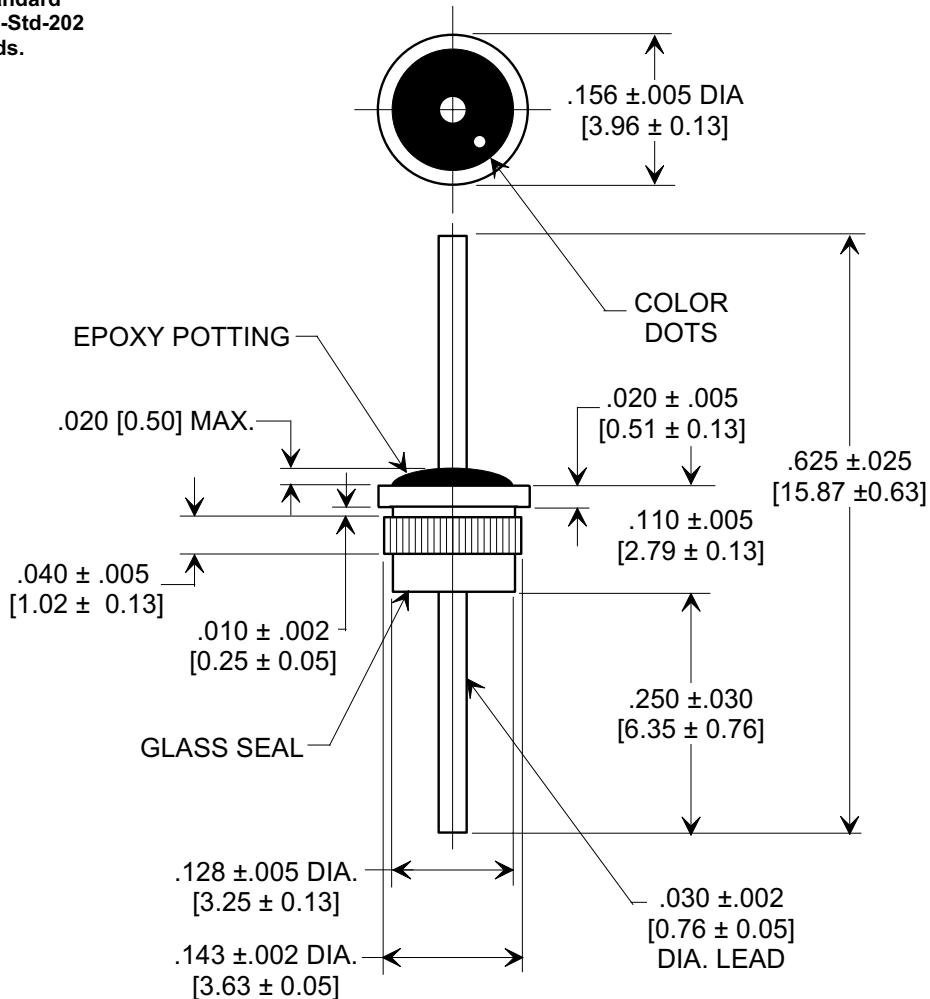



**MARKETING SALES DRAWING**  
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING  
DIMENSIONS IN METRIC - [ ]

## Electrical Testing per Tucsonix standard test plans and Mil-Std-202 Test Methods.

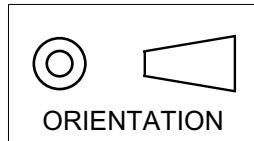

## NOTES:

1. Gold plating, type III (99.9% min.), 100 microinch thickness over 200 microinch nickel underplate.
2. Epoxy sealed on opposite end from glass.
3. Max. recommended terminal soldering temperature: 260°C.
4. Recommended mounting hole: .136/.137 [3.45/3.48]. Hole must be free of insulating material. Proper installation requires firm, steady pressure until flange is fully seated.
5. Operating temperature range: -55°C to +125°C.
6. This is Solderable to standard 1004-011.

Tucsonix RoHS compliant part number: 4304-011-1F

Fusionix RoHS compliant part number: 4304-011 LF.  
Customer must specify Standard or RoHS part number when ordering.

Customer must specify Standard or RoHS part number when ordering.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Tusonix:

4304-011LF