


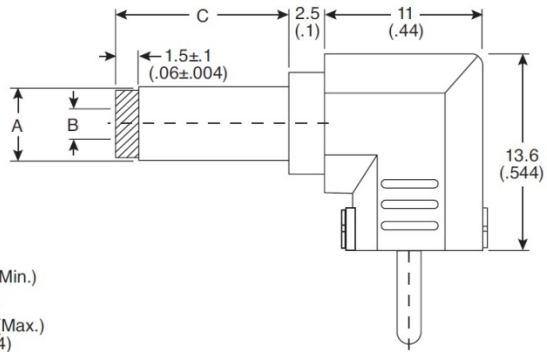
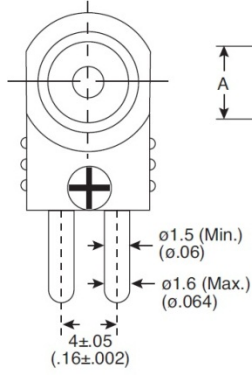
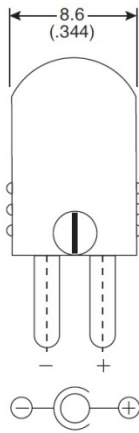
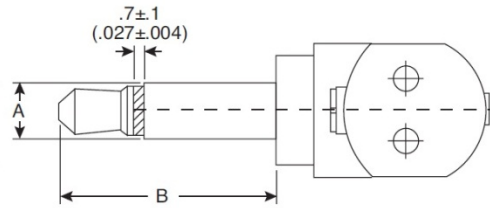


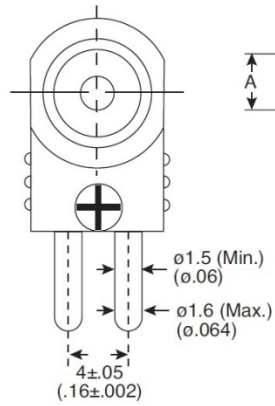


	A	B	C
4017TIP-EX	4.0 (.16)	1.7 (.07)	9.5 (.38)
3413TIP-EX	3.4 (.13)	1.3 (.05)	11 (.43)
5521TIP-EX	5.5 (.22)	2.1 (.08)	12 (.47)
5525TIP-EX	5.5 (.22)	2.5 (.10)	12 (.47)

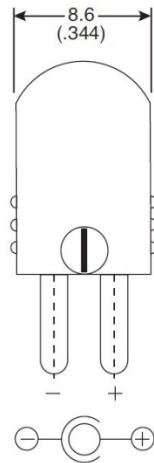

	A	B
25MPTIP-EX	2.5 (.10)	11 (.43)
35MPTIP-EX	3.5 (.14)	14 (.56)

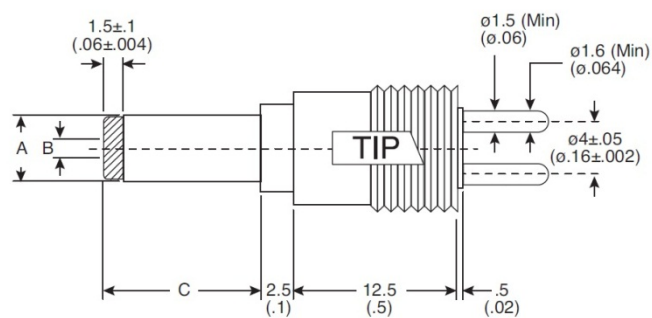

	A	B	C
4017ST-EX	4.0 (.16)	1.7 (.07)	9.5 (.38)
3413ST-EX	3.4 (.13)	1.3 (.05)	11 (.43)
5521ST-EX	5.5 (.22)	2.1 (.08)	12 (.47)
5525ST-EX	5.5 (.22)	2.5 (.10)	12 (.47)

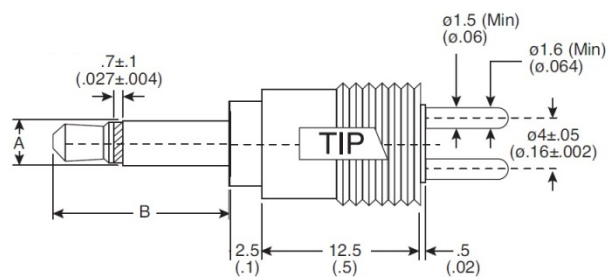

	A	B
25MPST-EX	2.5 (.10)	11.0 (.43)
35MPST-EX	3.5 (.14)	14.0 (.56)

CABLE-1-EX

Black jacket w/white mark

1500±50 (60±2.0)

30±5 (1.2±0.2)

6 max (2.4 max.)

6±2 (.24±.08)

Tinned

12

1

ø8.55 ±.30

1.20

6.80

40.60

4-1.50

4

2-ø1.70±.05