
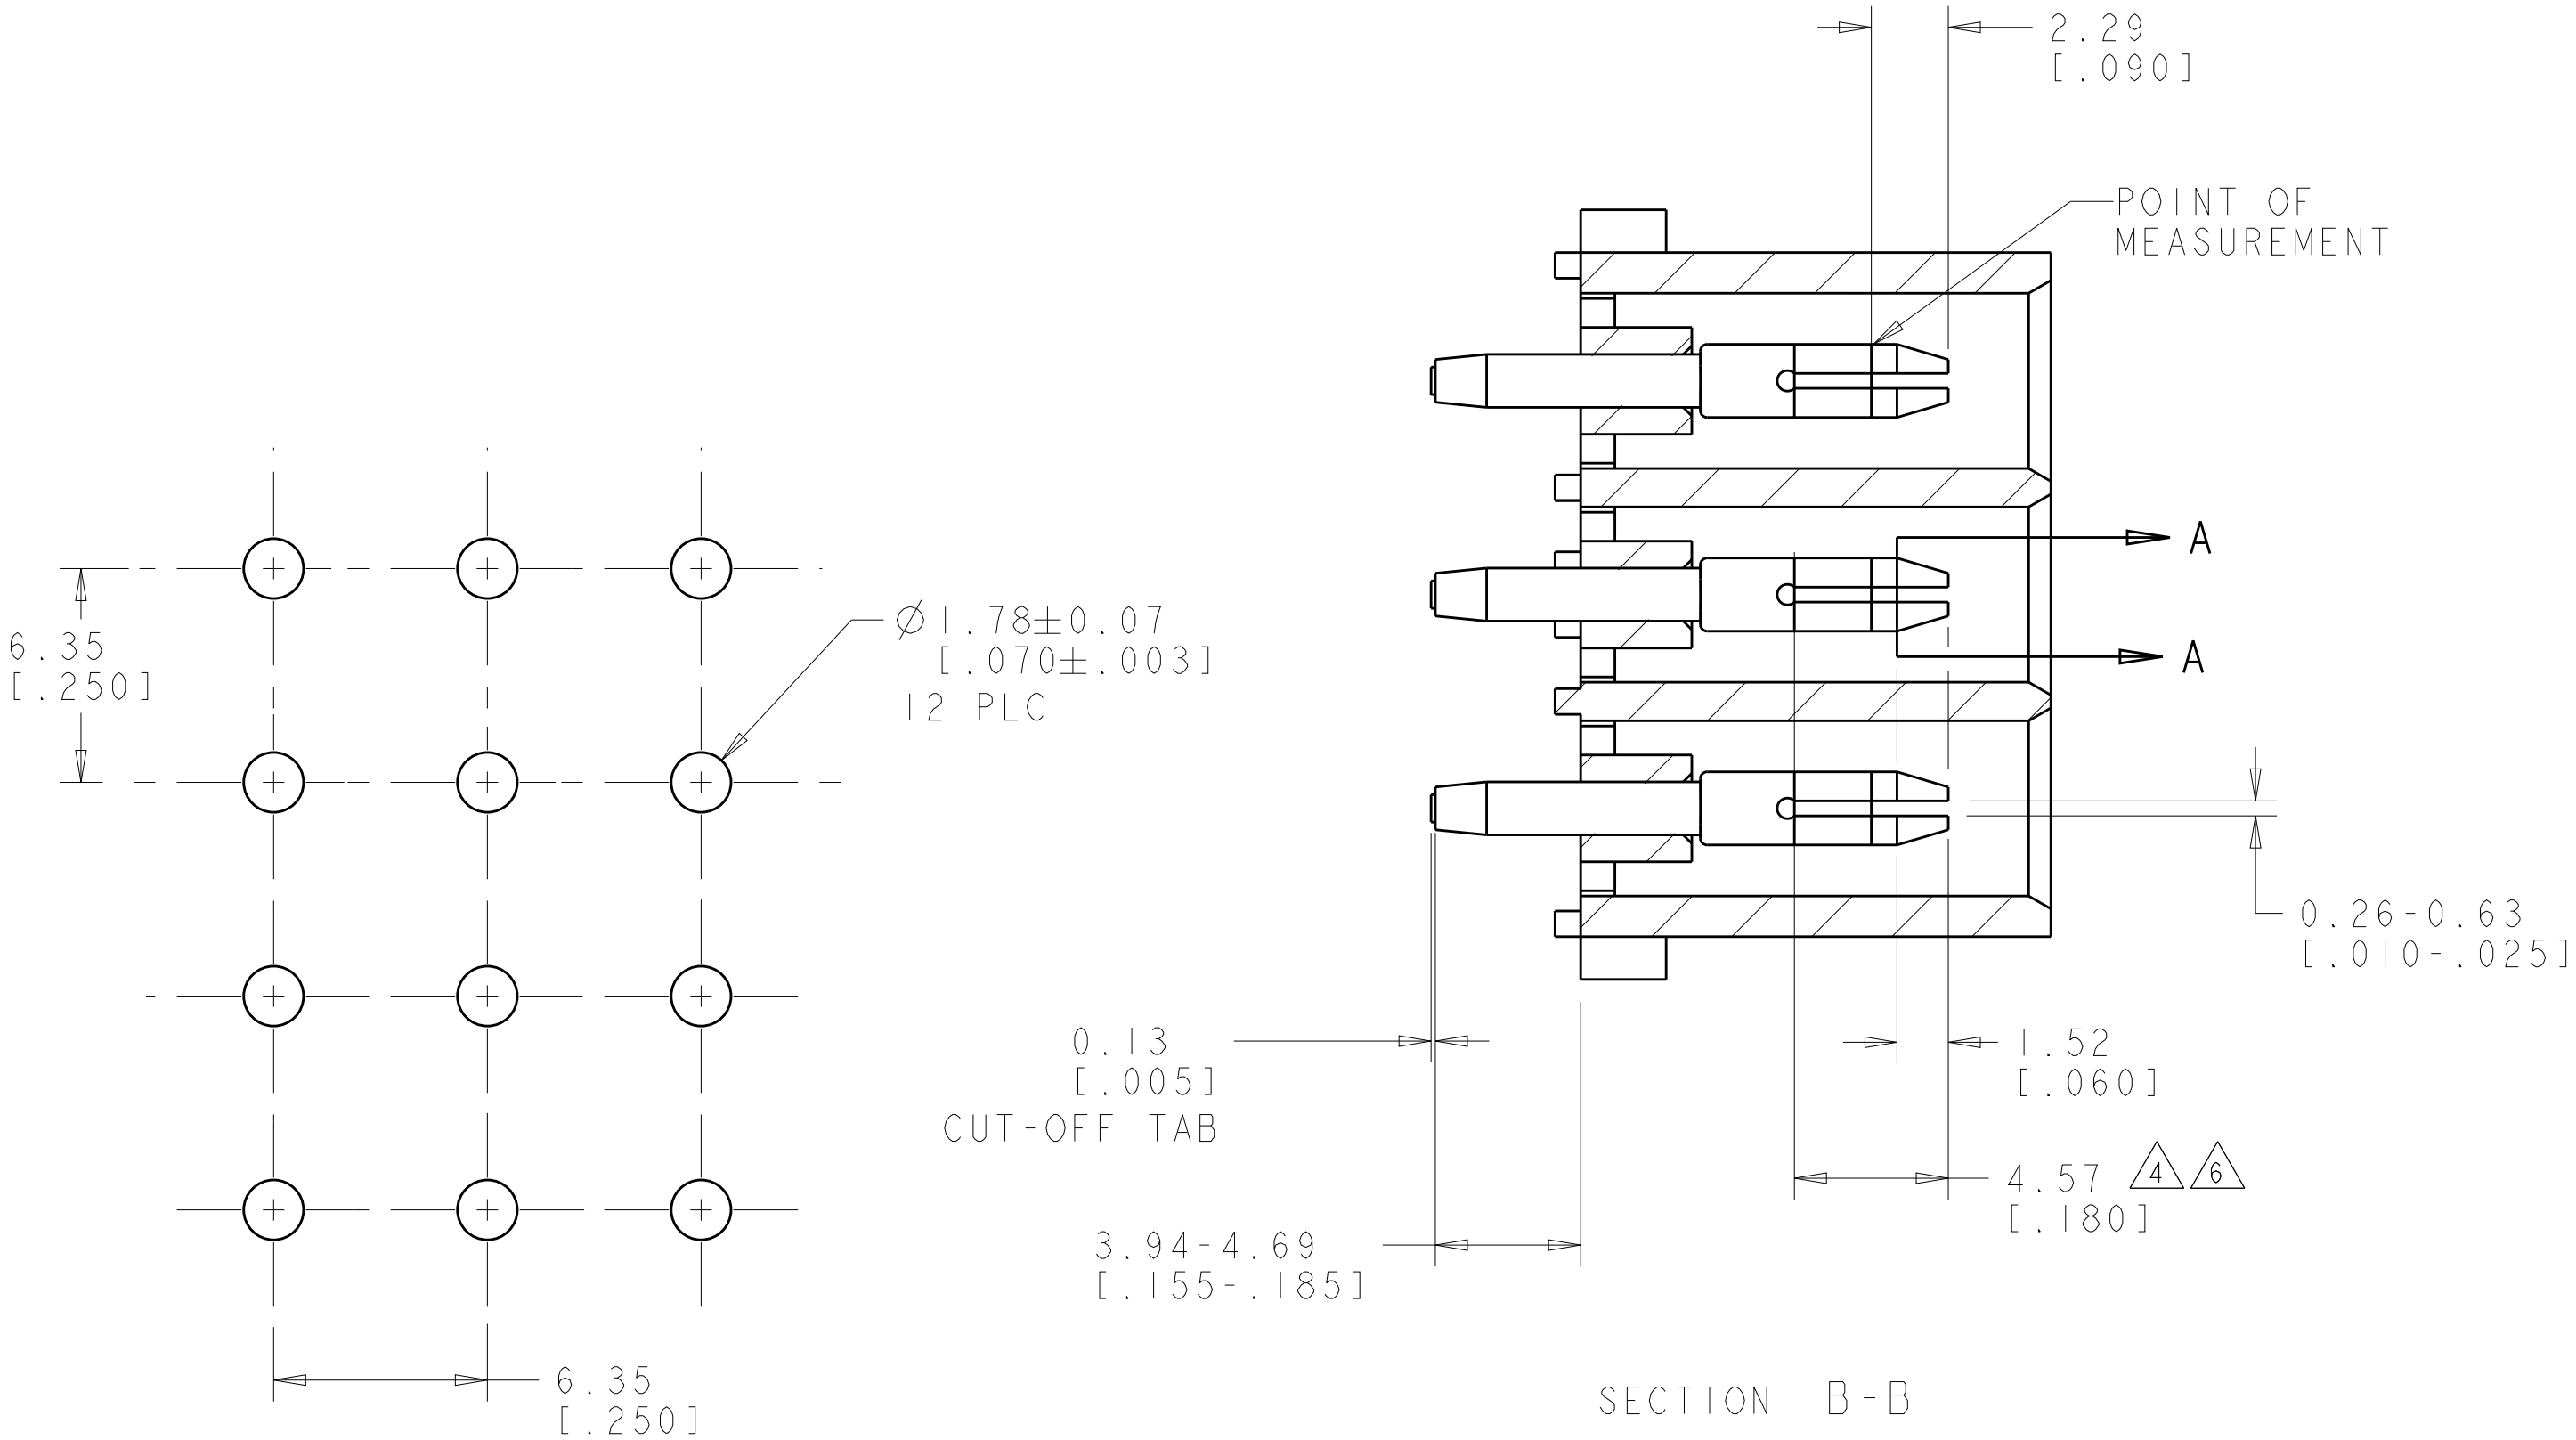
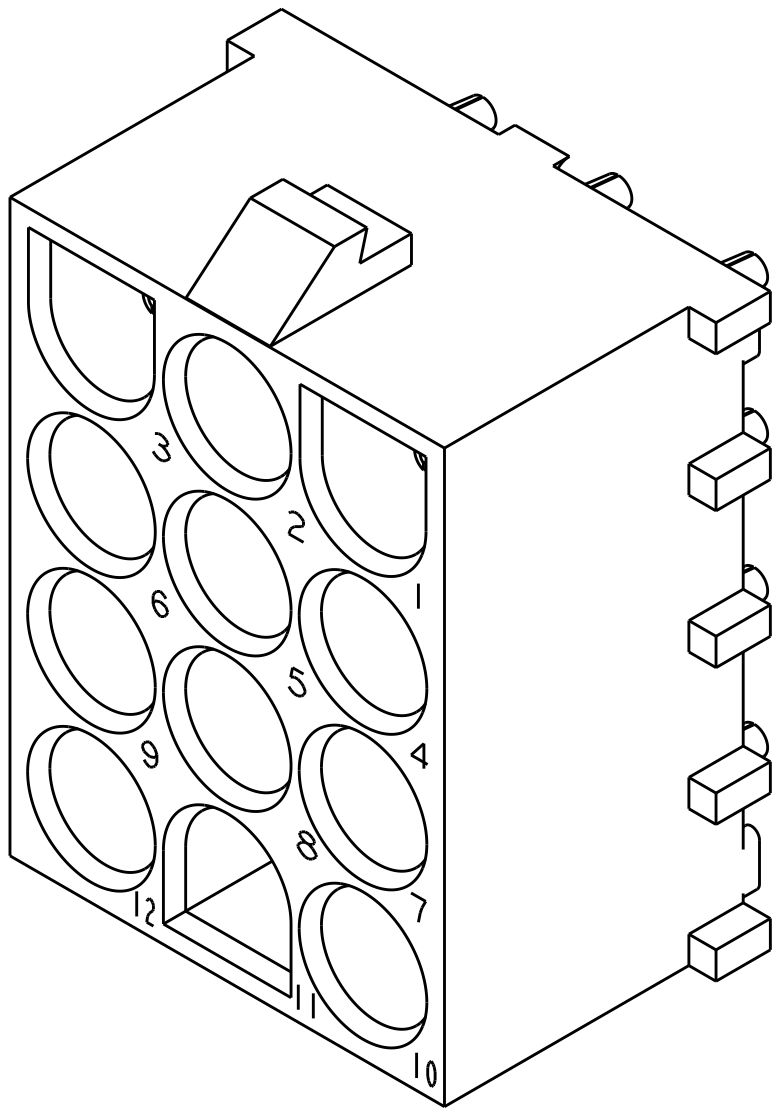



LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			M2	REVISED PER ECR-12-011660	24JAN2013	KH	TM

1. MATES WITH HOUSING 350735.
2. NOTE DELETED.
3. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
4. CONTACT IS PLATED OVERALL WITH 0.00127 [0.00050] NICKEL, THEN 0.00076 [0.00030] GOLD OVER CONTACT LENGTH INDICATED AND TIN LEAD ON SOLDER TAIL END.
5. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
6. CONTACT IS PLATED OVERALL WITH 0.00127 [0.00050] NICKEL, THEN 0.00076 [0.00030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
7. DIMENSIONS IN BRACKETS ARE IN INCHES.
8. SUPERSEDED BY 350713-4

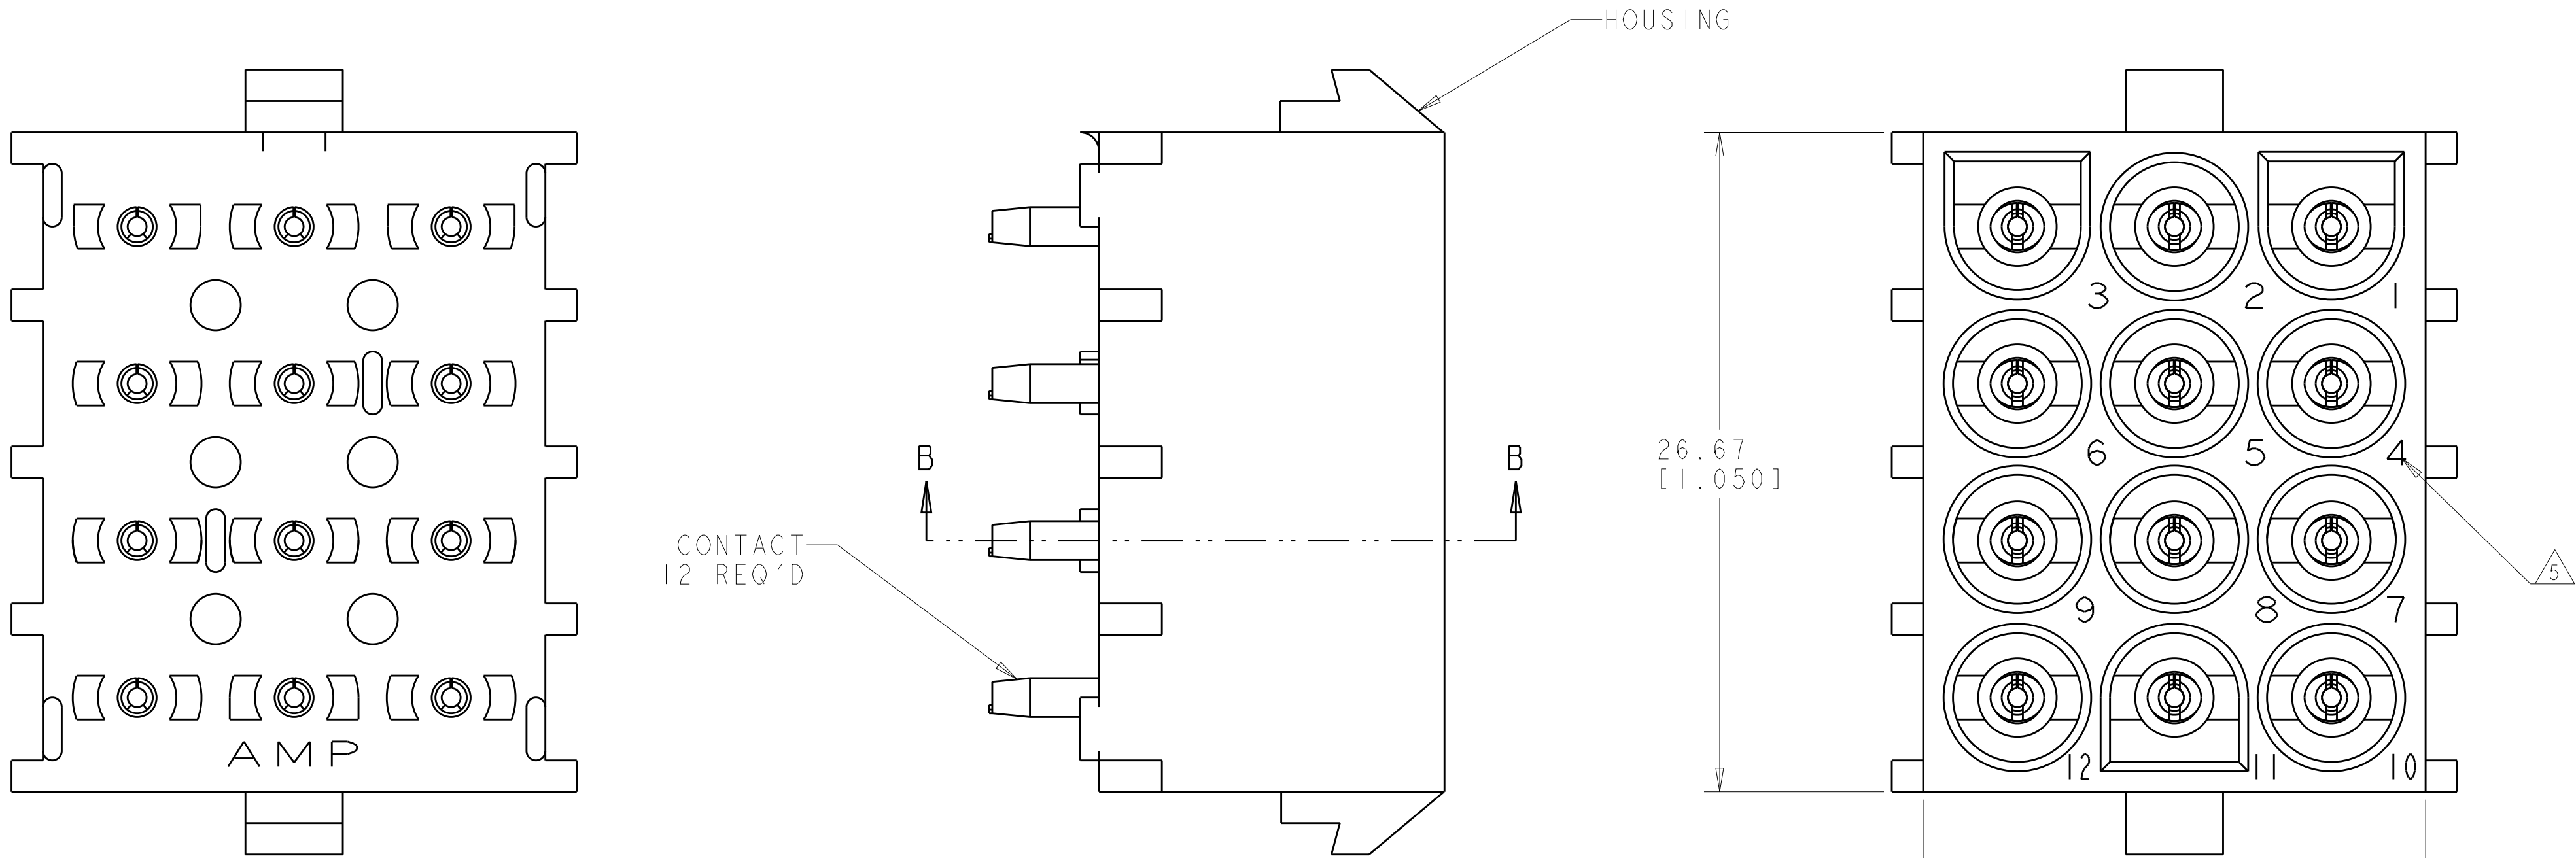

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [0.062] THICK P.C. BOARD
HOLE THAT CORRESPONDS TO REMOVED
CONTACT CAN BE OMITTED

PHOSPOR BRONZE, GOLD 6	NYLON, UL94V-0, NATURAL	350713-4
8 PHOSPOR BRONZE, GOLD 4	NYLON, UL94V-0, NATURAL	350713-2
PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, NATURAL	350713-1
PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL AND COLOR	PART NUMBER

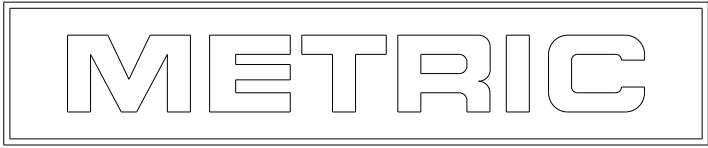

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 25JULY2005	NAME PIN HEADER ASSEMBLY, 12 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)		RESTRICTED TO -
DIMENSIONS: mm[INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK S. RIDGILL 25JULY2005			
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH #0°30'	APVD S. RIDGILL 25JULY2005	SIZE CAGE CODE DRAWING NO A100779C=350713		REV M2
	SEE TABLE	PRODUCT SPEC APPLICATION SPEC			
MATERIAL SEE TABLE	SEE TABLE	WEIGHT -	CUSTOMER DRAWING		SCALE 1:1
		SHEET 1 OF 1			