

# HOME PHONE NETWORKING BANDPASS FILTER



-  For use with Broadcom's® iLine 10™ Chipset (BCM4100 and BCM4210)
-  Includes isolation and EMI filtering
-  Designed to withstand 235°C peak infrared reflow temperature
-  B6013 is designed with a 2 kV, 1000 pf capacitor





## Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

PARAMETER	TEST CONDITION	UNITS	
		MIN	MAX
<b>HomePNA™ V2.0 Insertion Loss</b> (4.25 MHz to 9.75 MHz)	Input (1-3), Output (20-18)	1.0 dB	2.0 dB
<b>HomePNA™ V2.0 Attenuation</b> 1.1 MHz 22 MHz 54 MHz	Input (1-3), Output (20-18)	60 dB 35 dB 50 dB	
<b>HomePNA™ V2.0 Return Loss</b> (6.0 MHz to 9.0 MHz)	Input (20-18), Output (1-3)	12 dB	
<b>HomePNA™ V2.0 Common to Differential Mode Rejection</b> (200 kHz to 22 MHz)	Input (1-3), Output (20-18)	40 dB	
<b>Isolation</b>	Pins (1-3-5-7) shorted to (18-20) shorted	1500 Vrms <sup>1</sup>	
<b>Input Impedance</b>	(see table on page 2)		

**NOTE:** Filters are shipped in tubes unless Tape & Reel is specified. Please add the suffix "R" (for SF5770TR Tape & Reel orders) and the suffix "T" (for B6013T Tape & Reel orders). <sup>1</sup>Compliance with FCC Part 68 metallic and longitudinal voltage surge is provided by an external Teccor P3100SC sidactor across tip and ring.

## Mechanical

### SF5770T/B6013

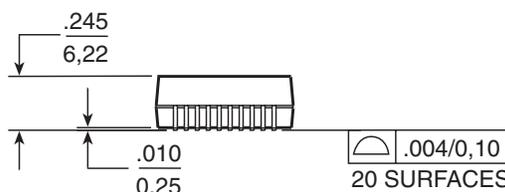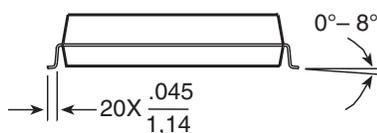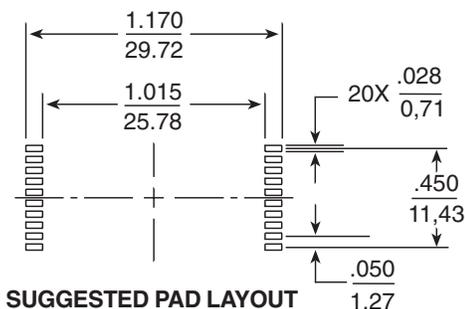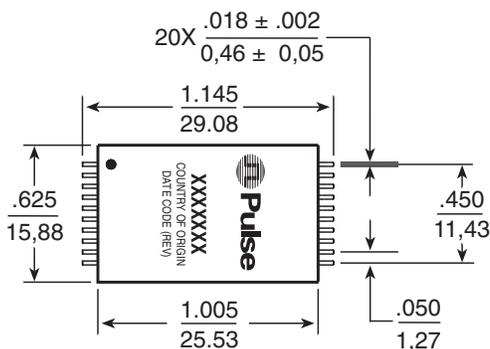

Weight ..... 4.5 grams  
 Tape & Reel ..... .250/reel  
 Tube ..... .30/tube  
**Dimensions:** Inches  
 mm  
 Unless otherwise specified,  
 all tolerances are ± .010  
 0,25

# HOME PHONE NETWORKING BANDPASS FILTER




## Schematics


SF5770T

B6013

URNS RATIO: (20-18):(1-3)=1:0.667  
(20-18):(5-7)=1:2

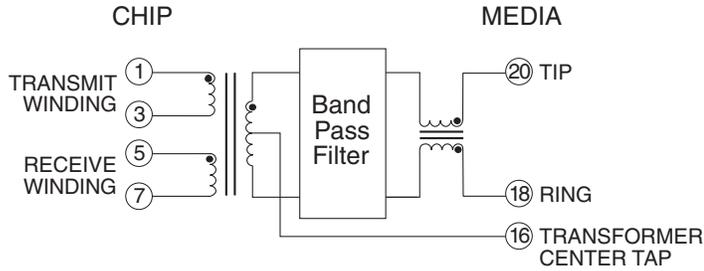

URNS RATIO: (20-18):(1-3)=1:0.667  
(20-18):(5-7)=1:2

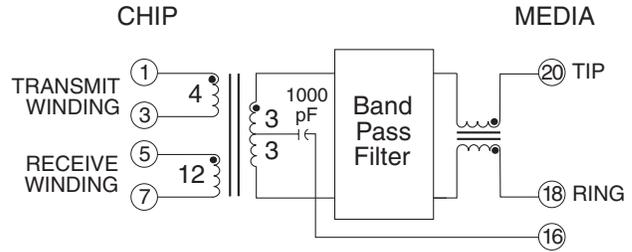

**NOTE:** Input impedance is measured across pins 18 to 20 with a 44.2 Ω load across pins 1 and 3. The magnitude of the input impedance shall be >10 Ω from 0-30 MHz and shall conform to the following lower-bound mask:

### Input Impedance

Frequency Range (kHz)	Minimum Impedance (Ω)
0 < f <= 0.285	1 M
0.285 < f <= 2.85	100 K
2.85 < f <= 28.5	10 K
28.5 < f <= 95	4.0 K
95 < f <= 190	2.0 K
190 < f <= 285	1.4 K
285 < f <= 380	1.0 K
380 < f <= 475	850
475 < f <= 570	700
570 < f <= 665	600
665 < f <= 760	525
760 < f <= 855	450
855 < f <= 950	400
950 < f <= 1000	350

Frequency Range (kHz)	Minimum Impedance (Ω)
1000 < f <= 1400	175
1400 < f <= 2300	100
2300 < f <= 2850	50
2850 < f <= 3085	25
3085 < f <= 3725	10
3725 < f <= 3935	25
3935 < f <= 4000	50
10000 < f <= 10450	40
10450 < f <= 10925	25
10925 < f <= 13125	10
13125 < f <= 14175	25
14175 < f <= 16800	50
16800 < f <= 21000	100
21000 < f <= 30000	50

### For More Information :

**UNITED STATES (Worldwide)**

12220 World Trade Drive  
San Diego, CA 92128  
U.S.A.  
http://www.pulseeng.com  
TEL: 858 674 8100  
FAX: 858 674 8262

**UNITED KINGDOM (Northern Europe)**

1 & 2 Huxley Road  
The Surrey Research Park  
Guildford, Surrey GU2 5RE  
United Kingdom  
TEL: 44 1483 401700  
FAX: 44 1483 401701

**FRANCE (Southern Europe)**

Zone Industrielle  
F-39270  
Orgelet  
France  
TEL: 33 3 84 35 04 04  
FAX: 33 3 84 25 46 41

**SINGAPORE (Southern Asia)**

150 Kampong Ampat  
#07-01/02  
KA Centre  
Singapore 368324  
TEL: 65 287 8998  
FAX: 65 280 0080

**TAIWAN, R.O.C. (Northern Asia)**

3F-4, No. 81, Sec. 1  
HsinTai Wu Road  
Hsi-Chih, Taipei Hsien  
Taiwan, R.O.C.  
Tel: 886 2 2698 0228  
FAX: 886 2 2698 0948

**HONG KONG (China/Hong Kong)**

19/F, China United Plaza  
1008 Tai Nan West Street  
Cheung Sha Wan, Kowloon  
Hong Kong, China  
TEL: 852 2788 6588  
FAX: 852 2776 1055

**DISTRIBUTOR**

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.