

September 1998 - Revised June 2002

Dual D-Type Flip-Flop with Set and Reset Positive-Edge-Triggered

Features

- **Buffered Inputs**
- **Typical Propagation Delay (AC00)**
 - 4.9ns at $V_{CC} = 5V$, $T_A = 25^{\circ}C$, $C_L = 50pF$
- **Exceeds 2kV ESD Protection MIL-STD-883, Method 3015**
- **SCR-Latchup-Resistant CMOS Process and Circuit Design**
- **Speed of Bipolar FAST™/AS/S with Significantly Reduced Power Consumption**
- **Balanced Propagation Delays**
- **AC Types Feature 1.5V to 5.5V Operation and Balanced Noise Immunity at 30% of the Supply**
- **±24mA Output Drive Current**
 - Fanout to 15 FAST™ ICs
 - Drives 50Ω Transmission Lines

Description

The 'AC74 and 'ACT74 dual D-type, positive edge triggered flip-flops use ADVANCED CMOS technology. These flip-flops have independent DATA, SET, RESET, and CLOCK inputs and Q and \bar{Q} outputs. The logic level present at the data input is transferred to the output during the positive going transition of the clock pulse. \overline{SET} and \overline{RESET} are independent of the clock and are accomplished by a low level at the appropriate input.

Ordering Information

PART NUMBER	TEMP. RANGE (°C)	PACKAGE
CD54AC74F3A	-55 to 125	14 Ld Cerdip
CD74AC74E	0 to 70, -40 to 85, -55 to 125	14 Ld PDIP
CD74AC74EX	0 to 70, -40 to 85, -55 to 125	14 Ld PDIP
CD74AC74M	0 to 70, -40 to 85, -55 to 125	14 Ld SOIC
CD54ACT74F3A	-55 to 125	14 Ld Cerdip
CD74ACT74E	0 to 70, -40 to 85, -55 to 125	14 Ld PDIP
CD74ACT74EX	0 to 70, -40 to 85, -55 to 125	14 Ld PDIP
CD74ACT74M	0 to 70, -40 to 85, -55 to 125	14 Ld SOIC


NOTES:

1. When ordering, use the entire part number. Add the suffix 96 to obtain the variant in the tape and reel.
2. Wafer and die for this part number is available which meets all electrical specifications. Please contact your local TI sales office or customer service for ordering information.


CD54/74AC74, CD54/74ACT74

Pinout

CD54AC74, CD54ACT74
(CERDIP)
CD74AC74, CD74ACT74
(PDIP, SOIC)
TOP VIEW

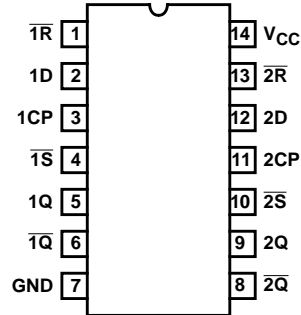

Functional Diagram

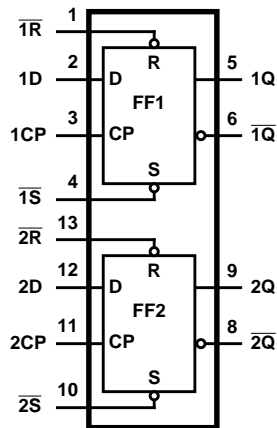

TRUTH TABLE

INPUTS				OUTPUTS	
SET	RESET	CP	D	Q	\bar{Q}
L	H	X	X	H	L
H	L	X	X	L	H
L	L	X	X	H (Note 5)	H (Note 5)
H	H	\uparrow	H	H	L
H	H	\uparrow	L	L	H
H	H	L	X	Q0	$\bar{Q}0$

NOTES:

- H = High level (steady state), L = Low level (steady state), X = Don't care, \uparrow = Transition from Low to High level.
- Q0 = the level of Q before the indicated input conditions were established.
- This configuration is nonstable, that is, it will not persist when set and reset inputs return to their inactive (high) level.

CD54/74AC74, CD54/74ACT74

Absolute Maximum Ratings

DC Supply Voltage, V_{CC} -0.5V to 6V
 DC Input Diode Current, I_{IK}
 For $V_I < -0.5V$ or $V_I > V_{CC} + 0.5V$ $\pm 20mA$
 DC Output Diode Current, I_{OK}
 For $V_O < -0.5V$ or $V_O > V_{CC} + 0.5V$ $\pm 50mA$
 DC Output Source or Sink Current per Output Pin, I_O
 For $V_O > -0.5V$ or $V_O < V_{CC} + 0.5V$ $\pm 50mA$
 DC V_{CC} or Ground Current, I_{CC} or I_{GND} (Note 6) $\pm 100mA$

Thermal Information

Thermal Resistance (Typical, Note 8) θ_{JA} ($^{\circ}C/W$)
 PDIP Package 90
 SOIC Package 175
 Maximum Junction Temperature (Plastic Package) $150^{\circ}C$
 Maximum Storage Temperature Range $-65^{\circ}C$ to $150^{\circ}C$
 Maximum Lead Temperature (Soldering 10s) $300^{\circ}C$

Operating Conditions

Temperature Range, T_A $-55^{\circ}C$ to $125^{\circ}C$
 Supply Voltage Range, V_{CC} (Note 7)
 AC Types 1.5V to 5.5V
 ACT Types 4.5V to 5.5V
 DC Input or Output Voltage, V_I , V_O 0V to V_{CC}
 Input Rise and Fall Slew Rate, dt/dv
 AC Types, 1.5V to 3V 50ns (Max)
 AC Types, 3.6V to 5.5V 20ns (Max)
 ACT Types, 4.5V to 5.5V 10ns (Max)

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTES:

6. For up to 4 outputs per device, add $\pm 25mA$ for each additional output.
7. Unless otherwise specified, all voltages are referenced to ground.
8. θ_{JA} is measured with the component mounted on an evaluation PC board in free air.

DC Electrical Specifications

PARAMETER	SYMBOL	TEST CONDITIONS		V _{CC} (V)	25°C		-40°C TO 85°C		-55°C TO 125°C		UNITS
		V _I (V)	I _O (mA)		MIN	MAX	MIN	MAX	MIN	MAX	
AC TYPES											
High Level Input Voltage	V _{IH}	-	-	1.5	1.2	-	1.2	-	1.2	-	V
				3	2.1	-	2.1	-	2.1	-	V
				5.5	3.85	-	3.85	-	3.85	-	V
Low Level Input Voltage	V _{IL}	-	-	1.5	-	0.3	-	0.3	-	0.3	V
				3	-	0.9	-	0.9	-	0.9	V
				5.5	-	1.65	-	1.65	-	1.65	V
High Level Output Voltage	V _{OH}	V _{IH} or V _{IL}	-0.05	1.5	1.4	-	1.4	-	1.4	-	V
			-0.05	3	2.9	-	2.9	-	2.9	-	V
			-0.05	4.5	4.4	-	4.4	-	4.4	-	V
			-4	3	2.58	-	2.48	-	2.4	-	V
			-24	4.5	3.94	-	3.8	-	3.7	-	V
			-75 (Note 9, 10)	5.5	-	-	3.85	-	-	-	V
			-50 (Note 9, 10)	5.5	-	-	-	-	3.85	-	V

CD54/74AC74, CD54/74ACT74

DC Electrical Specifications (Continued)

PARAMETER	SYMBOL	TEST CONDITIONS		V _{CC} (V)	25°C		-40°C TO 85°C		-55°C TO 125°C		UNITS
		V _I (V)	I _O (mA)		MIN	MAX	MIN	MAX	MIN	MAX	
Low Level Output Voltage	V _{OL}	V _{IH} or V _{IL}	0.05	1.5	-	0.1	-	0.1	-	0.1	V
			0.05	3	-	0.1	-	0.1	-	0.1	V
			0.05	4.5	-	0.1	-	0.1	-	0.1	V
			12	3	-	0.36	-	0.44	-	0.5	V
			24	4.5	-	0.36	-	0.44	-	0.5	V
			75 (Note 9, 10)	5.5	-	-	-	1.65	-	-	V
			50 (Note 9, 10)	5.5	-	-	-	-	-	1.65	V
Input Leakage Current	I _I	V _{CC} or GND	-	5.5	-	±0.1	-	±1	-	±1	μA
Quiescent Supply Current, FF	I _{CC}	V _{CC} or GND	0	5.5	-	4	-	40	-	80	μA
ACT TYPES											
High Level Input Voltage	V _{IH}	-	-	4.5 to 5.5	2	-	2	-	2	-	V
Low Level Input Voltage	V _{IL}	-	-	4.5 to 5.5	-	0.8	-	0.8	-	0.8	V
High Level Output Voltage	V _{OH}	V _{IH} or V _{IL}	-0.05	4.5	4.4	-	4.4	-	4.4	-	V
			-24	4.5	3.94	-	3.8	-	3.7	-	V
			-75 (Note 9, 10)	5.5	-	-	3.85	-	-	-	V
			-50 (Note 9, 10)	5.5	-	-	-	-	3.85	-	V
Low Level Output Voltage	V _{OL}	V _{IH} or V _{IL}	0.05	4.5	-	0.1	-	0.1	-	0.1	V
			24	4.5	-	0.36	-	0.44	-	0.5	V
			75 (Note 9, 10)	5.5	-	-	-	1.65	-	-	V
			50 (Note 9, 10)	5.5	-	-	-	-	-	1.65	V
Input Leakage Current	I _I	V _{CC} or GND	-	5.5	-	±0.1	-	±1	-	±1	μA
Quiescent Supply Current, FF	I _{CC}	V _{CC} or GND	0	5.5	-	4	-	40	-	80	μA
Additional Supply Current per Input Pin TTL Inputs High 1 Unit Load	ΔI _{CC}	V _{CC} -2.1	-	4.5 to 5.5	-	2.4	-	2.8	-	3	mA

NOTES:

- Test one output at a time for a 1-second maximum duration. Measurement is made by forcing current and measuring voltage to minimize power dissipation.
- Test verifies a minimum 50Ω transmission-line-drive capability at 85°C, 75Ω at 125°C.

ACT Input Load Table

INPUT	UNIT LOAD
D	0.53
\bar{R} , \bar{S}	0.58
CP	1

NOTE: Unit load is ΔI_{CC} limit specified in DC Electrical Specifications Table, e.g., 2.4mA max at 25°C.

CD54/74AC74, CD54/74ACT74

Prerequisite For Switching Function

PARAMETER	SYMBOL	V _{CC} (V)	-40°C TO 85°C		-55°C TO 125°C		UNITS
			MIN	MAX	MIN	MAX	
AC TYPES							
Data to CP Setup Time	t _{SU}	1.5	39	-	44	-	ns
		3.3 (Note 11)	4.3	-	4.9	-	ns
		5 (Note 12)	3.1	-	3.5	-	ns
Hold Time	t _H	1.5	0	-	0	-	ns
		3.3	0	-	0	-	ns
		5	0	-	0	-	ns
Removal Time, \overline{R} , \overline{S} to CP	t _{REM}	1.5	30	-	34	-	ns
		3.3	4.1	-	4.7	-	ns
		5	2.4	-	2.7	-	ns
Pulse Width, \overline{R} , \overline{S}	t _W	1.5	44	-	50	-	ns
		3.3	4.9	-	5.6	-	ns
		5	3.5	-	4	-	ns
Pulse Width, CP	t _W	1.5	49	-	56	-	ns
		3.3	5.5	-	6.3	-	ns
		5	3.9	-	4.5	-	ns
CP Frequency	f _{MAX}	1.5	10	-	9	-	MHz
		3.3	90	-	79	-	MHz
		5	125	-	110	-	MHz
ACT TYPES							
Data to CP Setup Time	t _{SU}	5 (Note 12)	3.5	-	4	-	ns
Hold Time	t _H	5	0	-	0	-	ns
Removal Time, \overline{R} , \overline{S} to CP	t _{REM}	5	2.4	-	2.7	-	ns
Pulse Width, \overline{R} , \overline{S}	t _W	5	4.4	-	5	-	ns
Pulse Width, CP	t _W	5	5	-	5.7	-	ns
CP Frequency	f _{MAX}	5	97	-	85	-	MHz

NOTES:

11. 3.3V Min at 3.6V.

12. 5V Min at 4.5V.

Switching Specifications Input t_p, t_f = 3ns, C_L = 50pF (Worst Case)

PARAMETER	SYMBOL	V _{CC} (V)	-40°C TO 85°C			-55°C TO 125°C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
AC TYPES									
Propagation Delay, CP to Q, \overline{Q}	t _{PLH} , t _{PHL}	1.5	-	-	114	-	-	125	ns
		3.3 (Note 14)	3.6	-	12.7	3.5	-	14	ns
		5 (Note 15)	2.6	-	9.1	2.5	-	10	ns

CD54/74AC74, CD54/74ACT74

Switching Specifications Input $t_r, t_f = 3\text{ns}$, $C_L = 50\text{pF}$ (Worst Case) (Continued)

PARAMETER	SYMBOL	V_{CC} (V)	-40°C TO 85°C			-55°C TO 125°C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Propagation Delay, \bar{R}, \bar{S} to Q, \bar{Q}	t_{PLH}	1.5	-	-	120	-	-	132	ns
		3.3	3.8	-	13.4	3.7	-	14.7	ns
		5	2.7	-	9.5	2.6	-	10.5	ns
	t_{PHL}	1.5	-	-	131	-	-	144	ns
		3.3	4.1	-	14.6	4	-	16.1	ns
		5	3	-	10.4	2.9	-	11.5	ns
Input Capacitance	C_I	-	-	-	10	-	-	10	pF
Power Dissipation Capacitance	C_{PD} (Note 16)	-	-	55	-	-	55	-	pF
ACT TYPES									
Propagation Delay, CP to Q, \bar{Q}	t_{PHL} t_{PLH}	5 (Note 15)	2.5	-	8.6	2.4	-	9.5	ns
Propagation Delay, \bar{R}, \bar{S} to Q, \bar{Q}	t_{PLH}	5	3	-	10.5	2.9	-	11.5	ns
	t_{PHL}	5	3.2	-	11.4	3.1	-	12.5	ns
Input Capacitance	C_I	-	-	-	10	-	-	10	pF
Power Dissipation Capacitance	C_{PD} (Note 16)	-	-	55	-	-	55	-	pF

NOTES:

13. Limits tested 100%.

14. 3.3V Min at 3.6V, Max at 3V.

15. 5V Min at 5.5V, Max at 4.5V.

16. C_{PD} is used to determine the dynamic power consumption per flip-flop.

$P_D = C_{PD}V_{CC}^2 f_i + \Sigma (C_L V_{CC}^2 f_o) + V_{CC} \Delta I_{CC}$ where f_i = input frequency, f_o = output frequency, C_L = output load capacitance, V_{CC} = supply voltage.

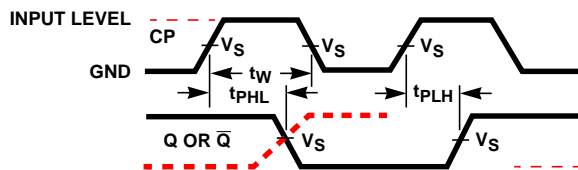


FIGURE 1.

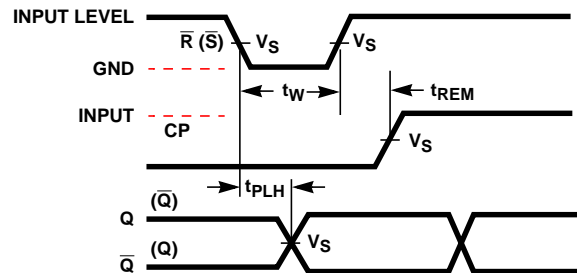


FIGURE 2.


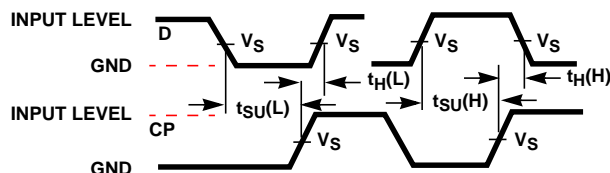


FIGURE 3.



NOTE: For AC Series Only: When $V_{CC} = 1.5V$, $R_L = 1kΩ$.

	AC	ACT
Input Level	V_{CC}	3V
Input Switching Voltage, V_S	$0.5 V_{CC}$	1.5V
Output Switching Voltage, V_S	$0.5 V_{CC}$	$0.5 V_{CC}$

FIGURE 4. PROPAGATION DELAY TIMES

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Mailing Address:

Texas Instruments
Post Office Box 655303
Dallas, Texas 75265