



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

C-F005.DWG		

REVISIONS			DDC. ND. SPC-F005 * Effective: 7/8/02 * DCP No: 1398					
DCP #	RE∨	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVI	DATE
2070	Α	Released	JN	09-03-09	JWM	09-03-09	JWM	09-03-09





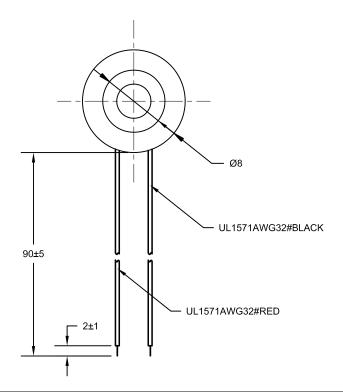

Specification

1. Rated Voltage: 1.5V

2. Operating Voltage: 1~2V

3. Max. Rated Current: 30mA

4. Coil Resistance: $16\pm4\Omega$

5. Coil Impedance: 40Ω

6. Min. Sound Pressure Level: 75dB/ 10cm

7. Resonant Frequency: 2048 Hz

8. Case Material/ Color: NORYL/ Black

9. Operating Temperature: -20~+70°C

10. Store Temperature: -30~+80°C

11. Weight: 2g

DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

TOLERANCES:

DRAWN BY:	DATE:
Jason Nash	09-03-09
CHECKED BY:	DATE:
Jason Nash	09-03-09
APPROVED BY:	DATE:
Jason Nash	09-03-09

-	DRAW	ING TITLE:					
09			Magnetic Tr	ansc	lucer		
<u>.</u>	SIZE	DWG. N□.		ELEC	TRONIC FI	LE	REV
09	Α	MCKP12-G1	05AL1-K4081	25	5R0894.	Α	
·09	SCALI	E: NTS	UM.: INCHES [mm]		SHEET:	1 OF	1