

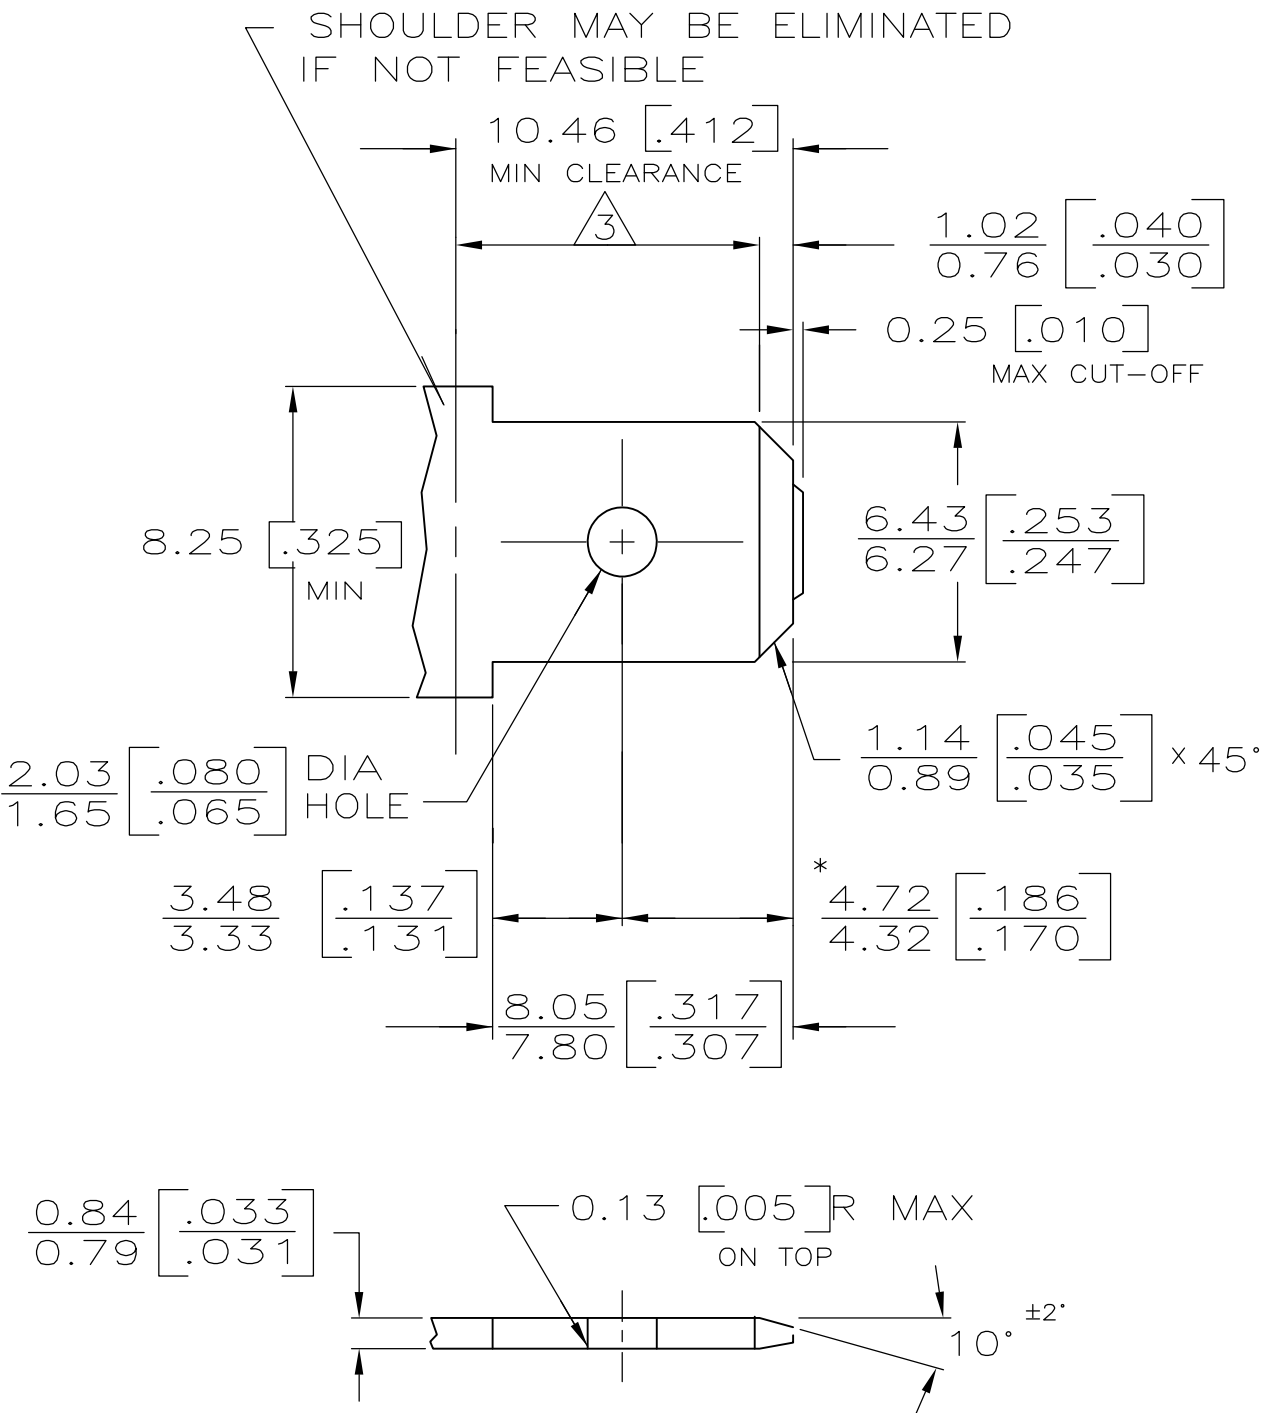
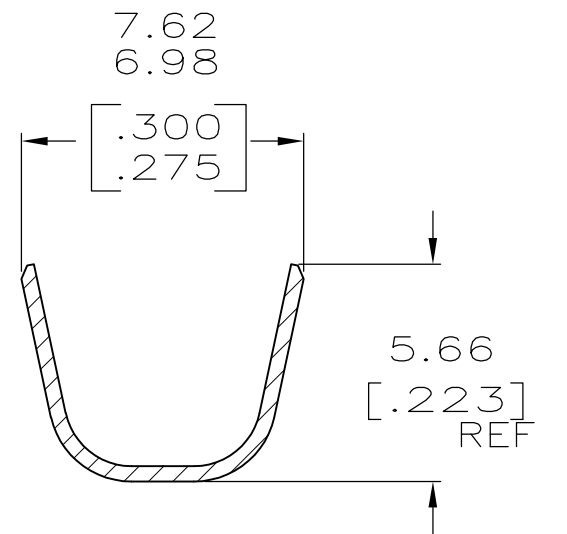
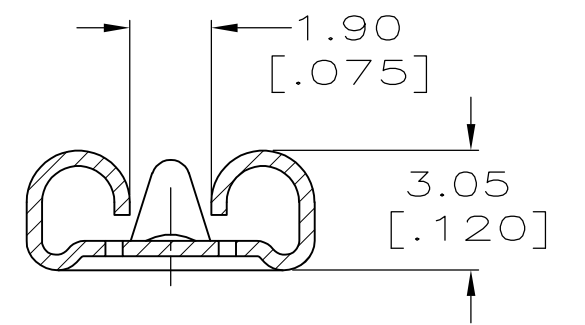
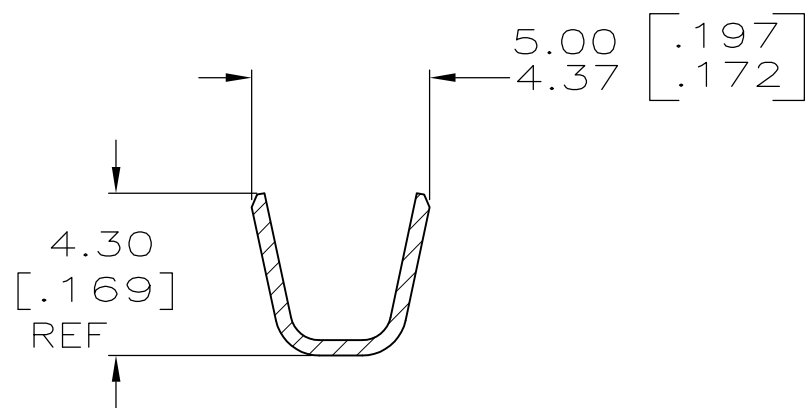


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
AF	50		C	REVISED PER ECR-12-013486	09JAN13	KH KR

SUGGESTED MATING TAB

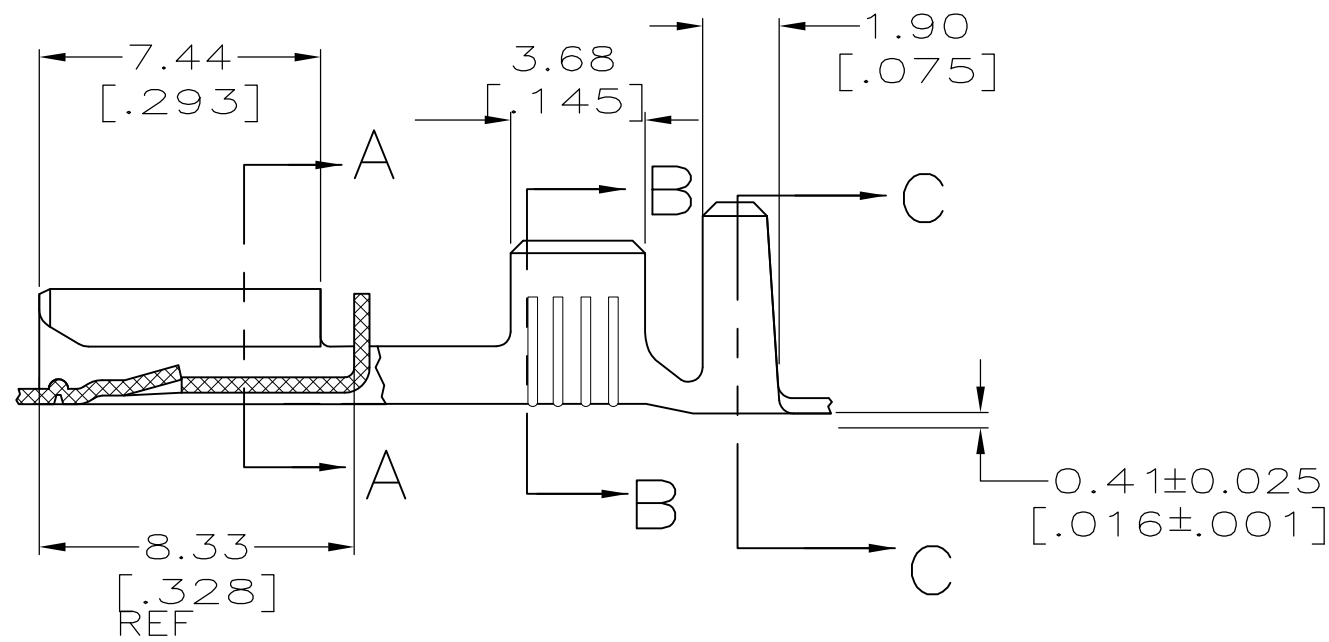

- MATL: 1/2 H BRASS OR NICKEL PL STEEL.
- NO BURRS PERMISSIBLE AT HOLE.
MUST BE FLAT WITHIN 0.076 [.003] OVER THIS LENGTH.
- TIN PLATING IS REQUIRED ON BRASS WHEN TERMINAL TEMP. IS OVER 225° F
- HOLE MUST BE SYMMETRICAL ABOUT TAB C WITHIN 0.076 [.003]
- * TO BE USED ONLY WHEN SHOULDER IS ELIMINATED.

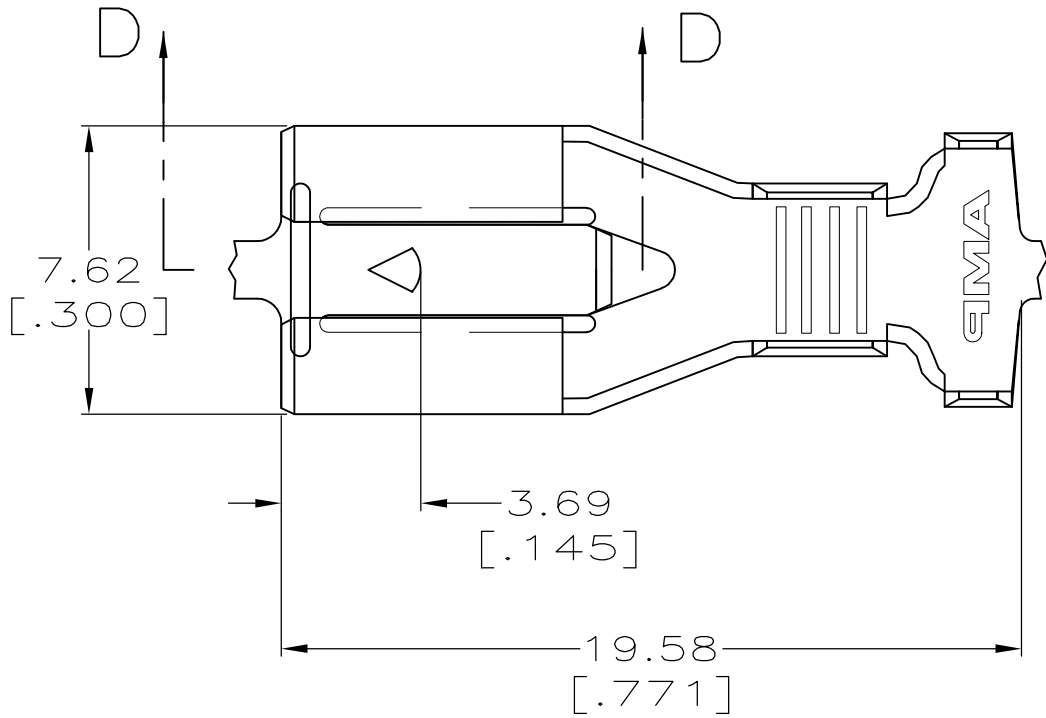

TIN PLATE	1217092-2
-	1217092-1
FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 6/3/98	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK MS FEHER 6/3/98				
		APVD D BRATINA 6/3/98	NAME RECEPTACLE, POSITIVE LOCK, 6.35 [.250] SERIES			
		PRODUCT SPEC	-			
		APPLICATION SPEC	114-2061			
MATERIAL BRASS		WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C-1217092	RESTRICTED TO -
		FINISH SEE TABLE	CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1
					REV C	