

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16		A	REV PER ECO 08-014295	6/9/2008	DW	JL

D

C

B


A

D




C

B

A

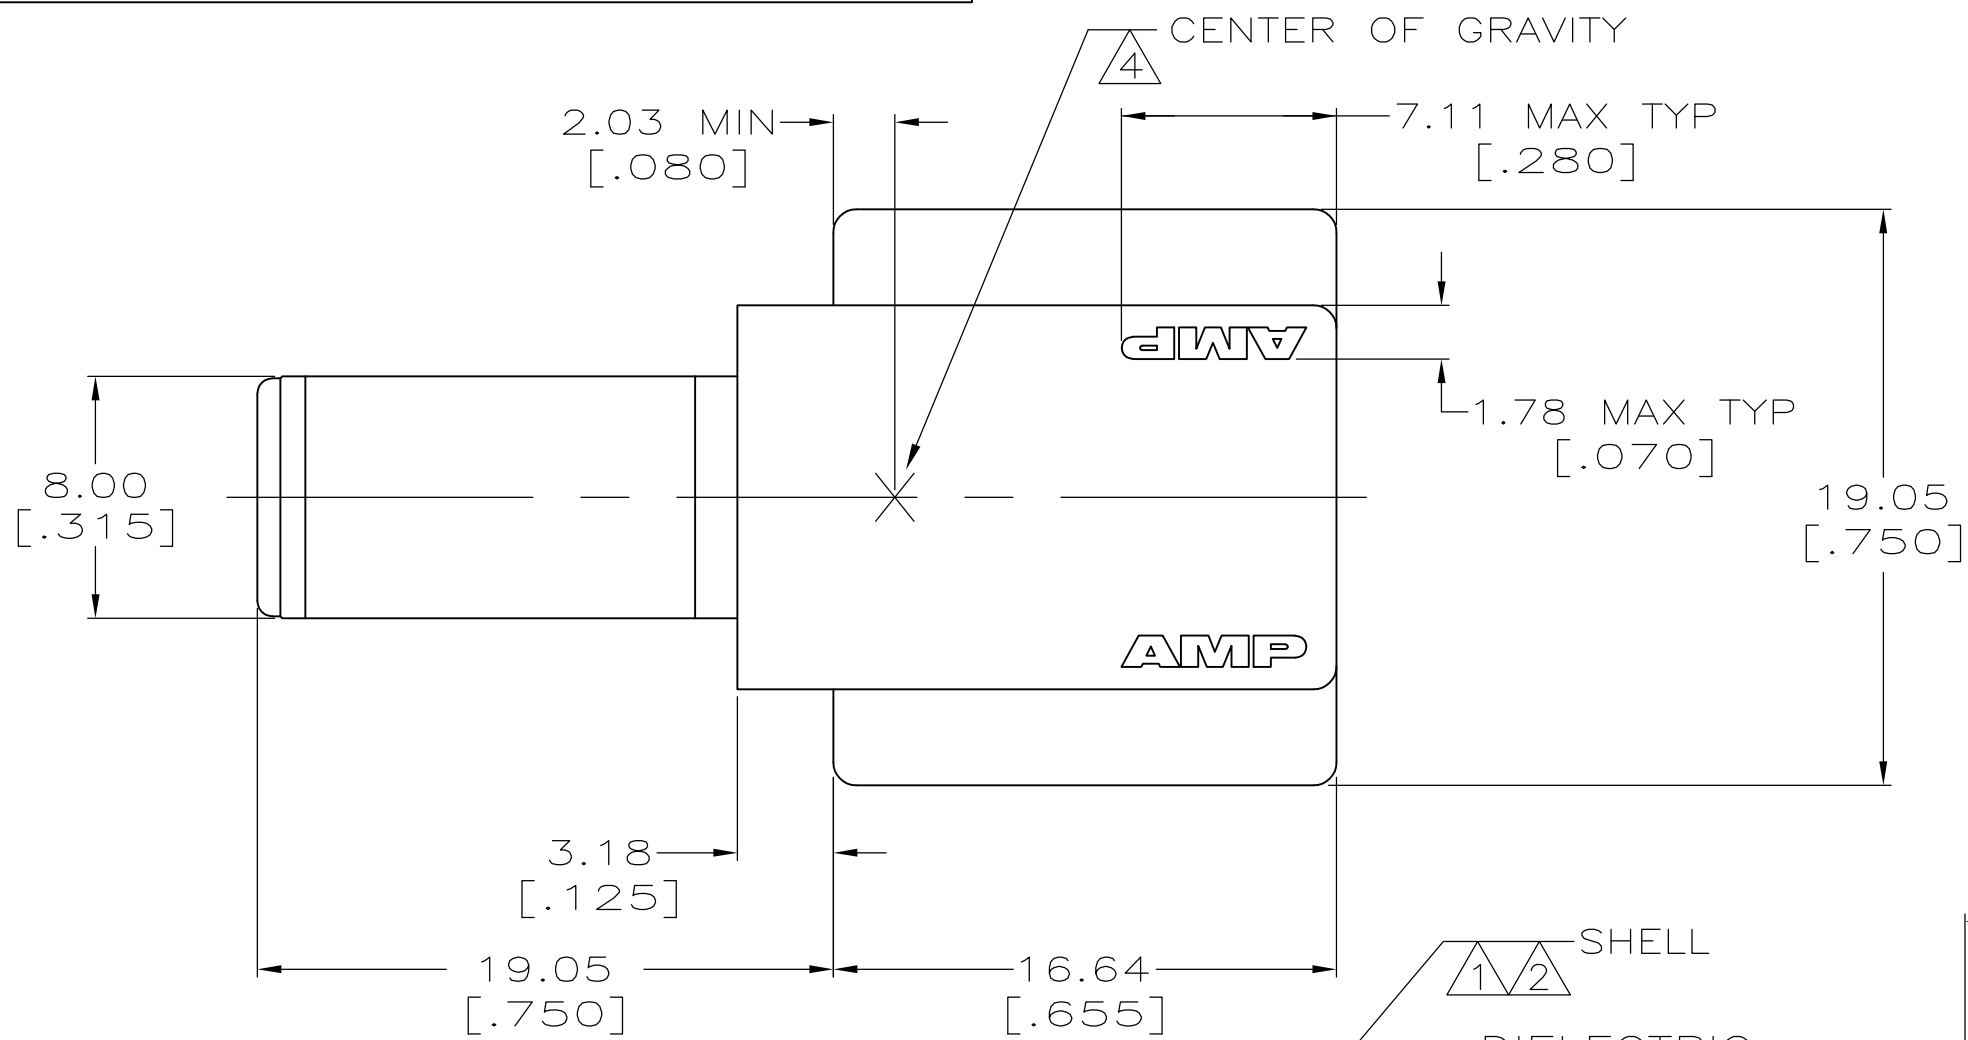

- 1 ZINC PER QQ-Z-363.
- 2 TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.
- 3. CONTACT WILL ACCEPT CENTER CONDUCTOR DIAMETER RANGE OF 0.56 [.022]–1.07 [.042].
- 4 CONNECTOR IS COUNTERBALANCED FOR VACUUM PICKUP AND ANTI-TIPPING ON PCB.
- 5 PHOSPHOR BRONZE PER QQ-B-750.
- 6 POLYESTER PCT GENERAL PURPOSE.
- 7 MAJOR DIA MODIFIED TO .363 REF.

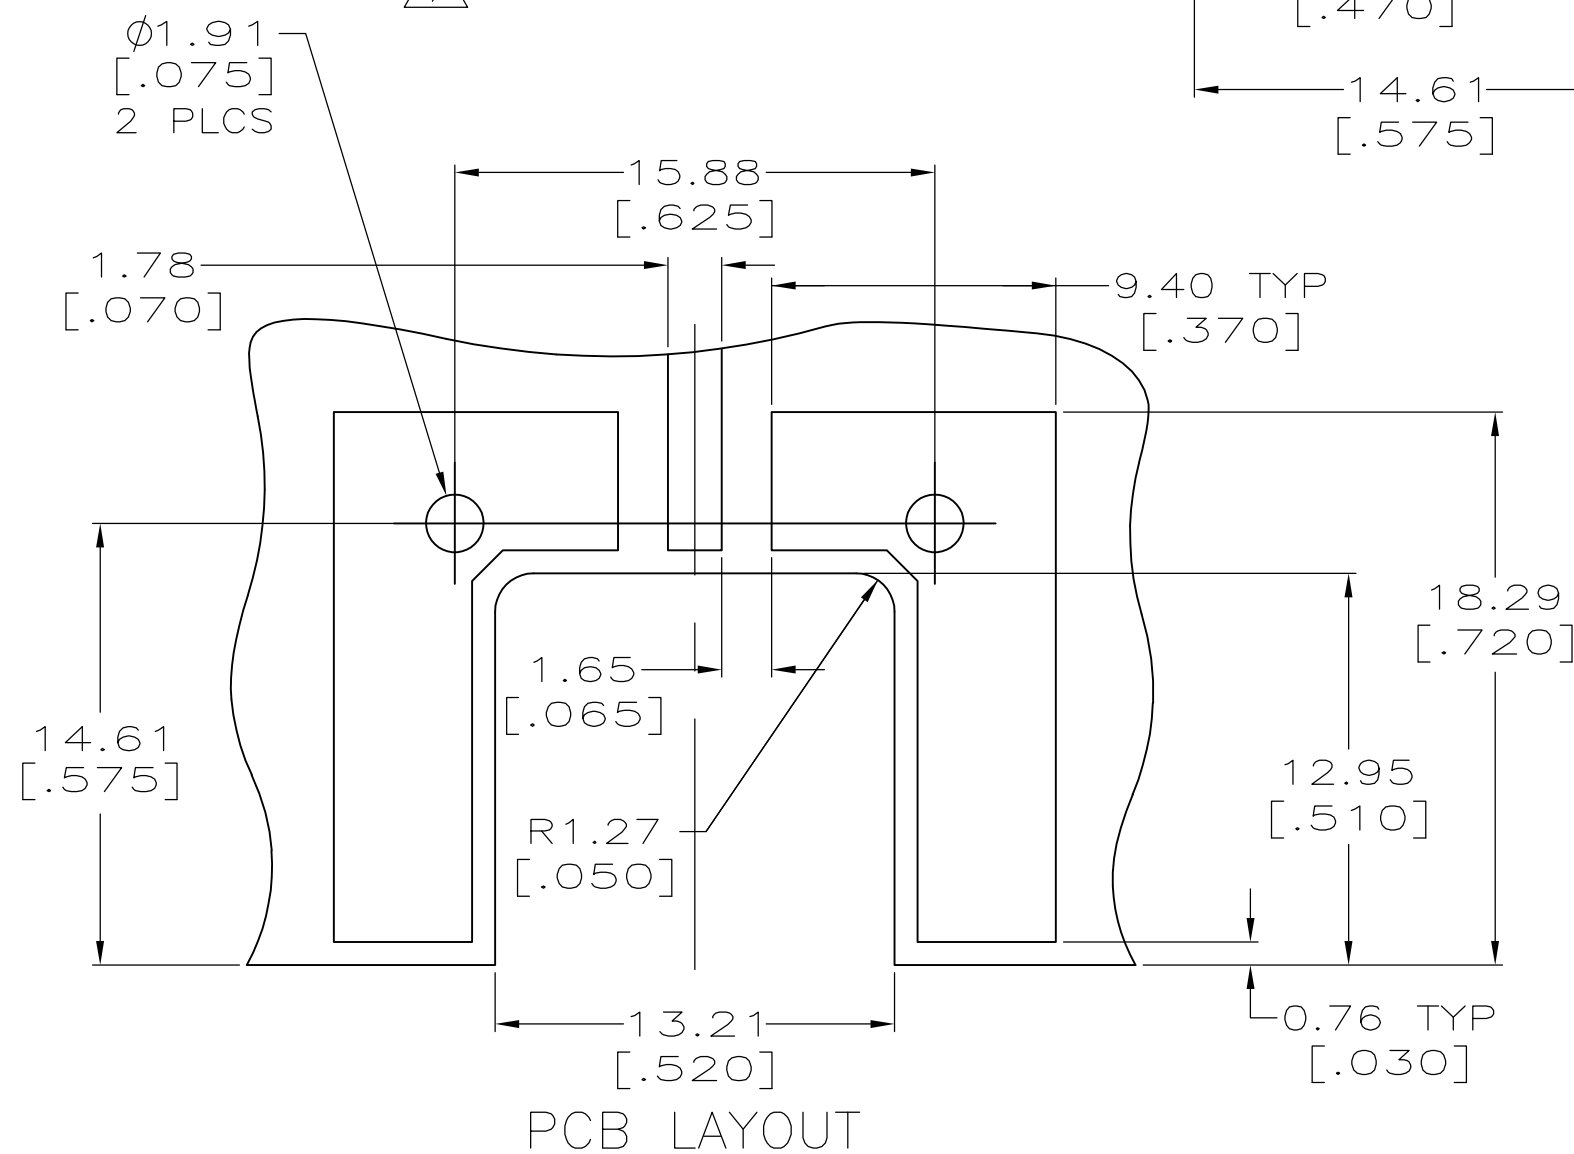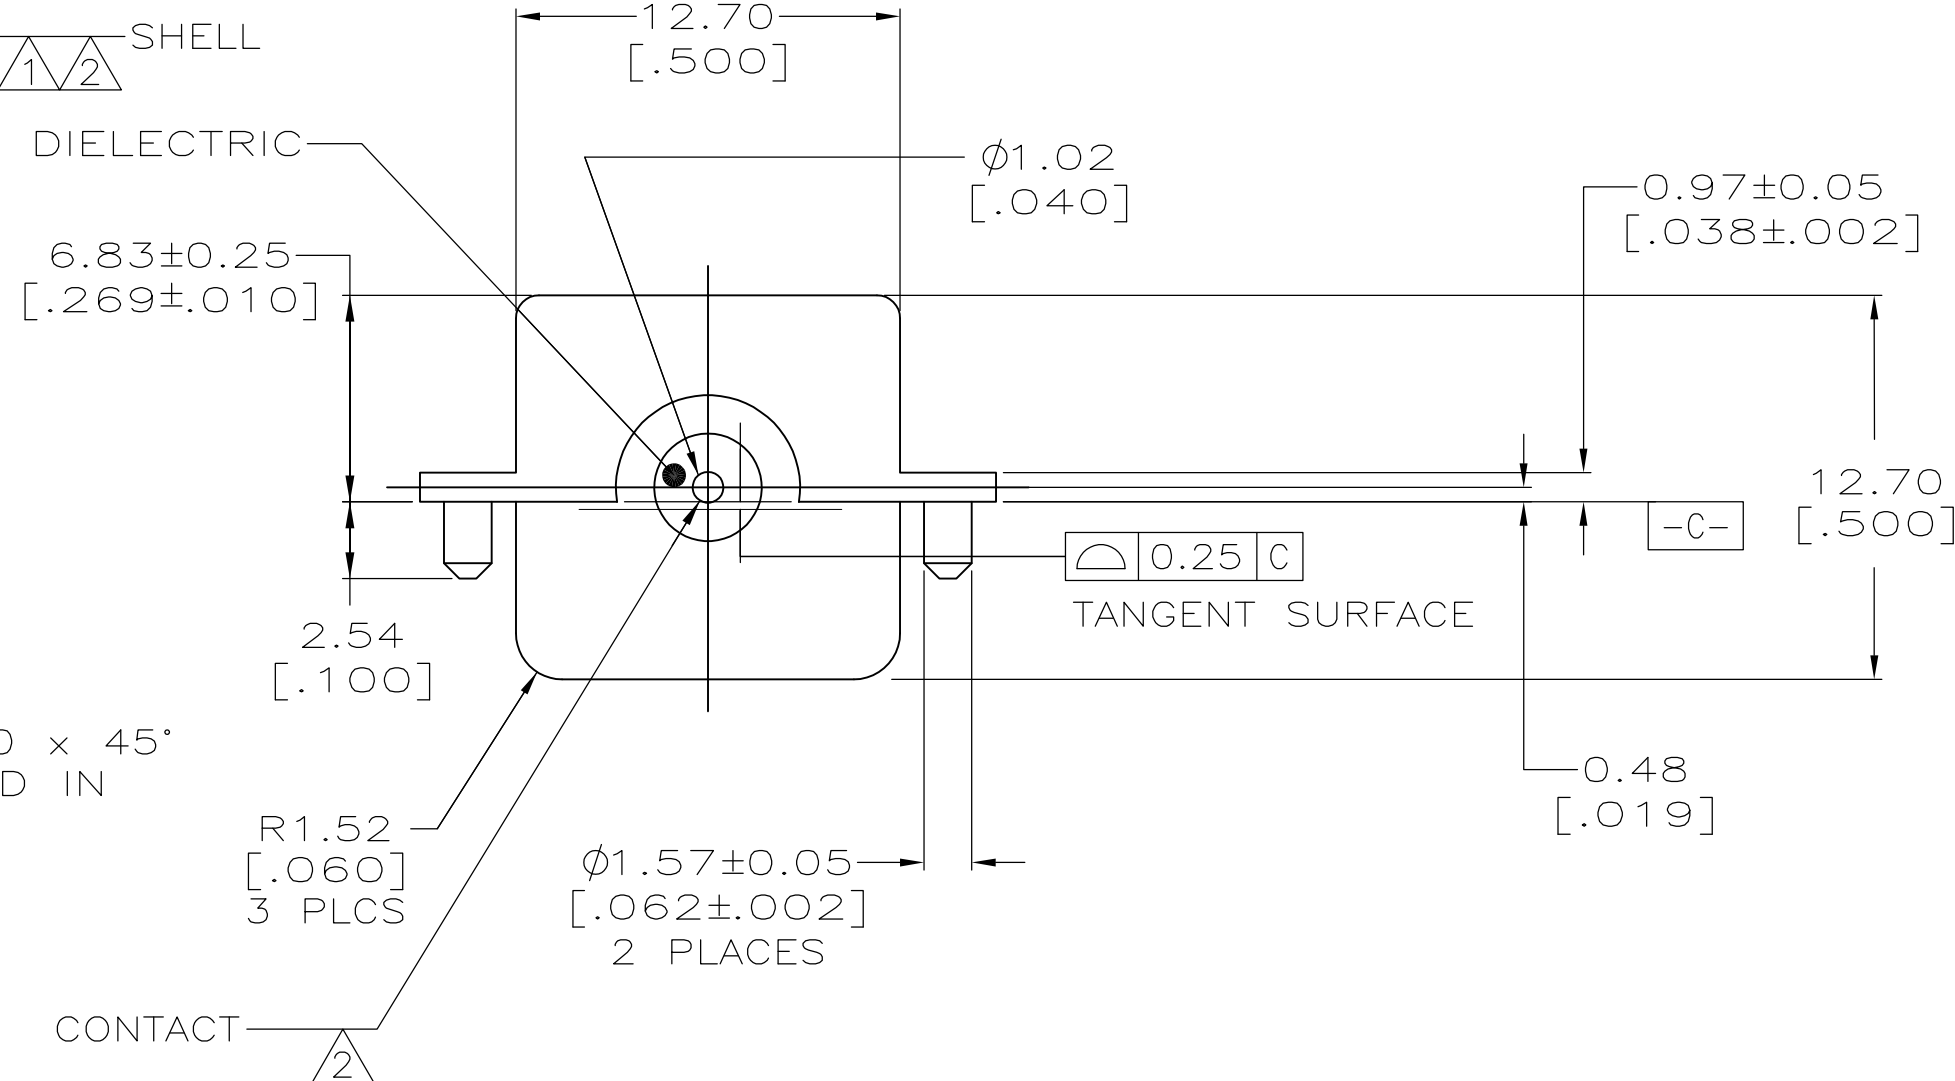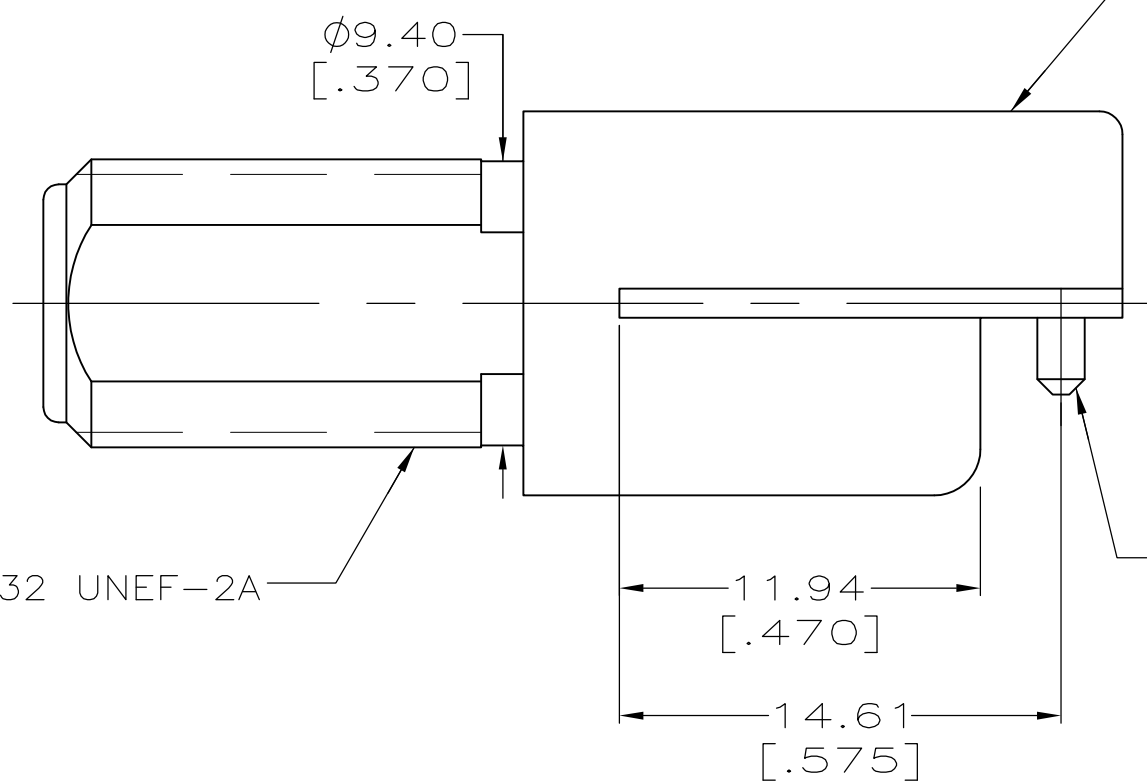

CONTACT MATERIAL	DIELECTRIC MATERIAL	PART NUMBER
		5415322-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G. ATTADIA - 01FEB2005	Tyco Electronics Corporation			
		CHK J. HAVENER 01FEB2005	Harrisburg, Pa 17105-3608			
		APVD K. WEIDNER 01FEB2005	NAME			
		PRODUCT SPEC	JACK, PCB,			
		APPLICATION SPEC	SURFACE MT, F SERIES			
		—	—			
MATERIAL		WEIGHT 22 GRAMS	SIZE A2	CAGE CODE 00779	DRAWING NO C=5415322	RESTRICTED TO —
SEE NOTES 1		SEE NOTE 2	CUSTOMER DRAWING			
			SCALE 4:1	SHEET 1	OF 1	REV A