

SPECIFICATION SHEET

55FA0444

CABLE, ELECTRIC, FILTER LINE - ELECTROLOSS"
FOUR COMPONENT


20 June 1983

150°C

Revision D

The complete requirements for procuring the cable described herein shall consist of this document and the issue in effect of Raychem Specification 55F.

COMPONENT WIRES - 55FA0414

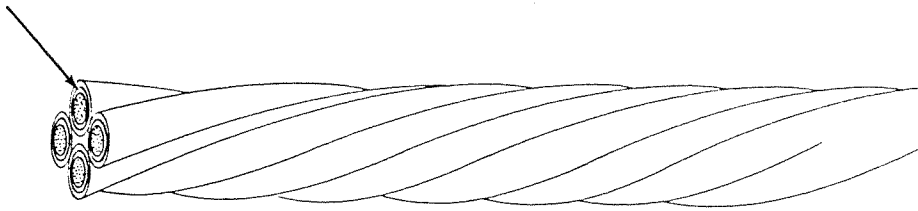

CABLE CONSTRUCTION DETAILS				
PART NUMBER	CONDUCTOR SIZE (AWG)	OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lb/1000 ft)
		NOMINAL 1/	MAXIMUM	
55FA0444-26-*	26	.121	.144	12.6
55FA0444-24-*	24	.128	.153	14.7

1/ Nominal values are for information only. Nominal values are not requirements.

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

BLOCKING: 200 ± 3°C for 6 hours

INSULATION FLAWS:

Spark Test, 3.0 kV (rms), 60 Hz

Impulse Dielectric Test, 8.0 kV (peak)

VOLTAGE WITHSTAND (DIELECTRIC):

Conductor to conductor, 1500 volts (rms), 60 Hz

PART NUMBER:

The "*" in the part numbers above shall be replaced by color code designators in accordance with MIL-STD-681; except that violet shall be light violet and the designator shall be 7L; with slashes separating the component wire colors.

Example: AWG 24, light violet, light violet with blue stripe, light violet with orange stripe and light violet with green stripe component wires:

55FA0444-24- 7L/7L6/7L3/7L5.

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
415) 361 3333 TWX 910 373 1205