


### GLOBAL PERFORMANCE SWITCHERS

#### Features:

- Cost-effective power source
- Universal input 90-264 Vac
- 2-year warranty
- Single and multiple outputs
- Overload and overvoltage protection
- Built-in EMI filter
- UL1950, CSA-C22.2 No. 234 Level 3, IEC950 and EN60950
- Operation at no-load (single output models)
- RoHS Compliant (with G suffix)
- CE marked to LVD

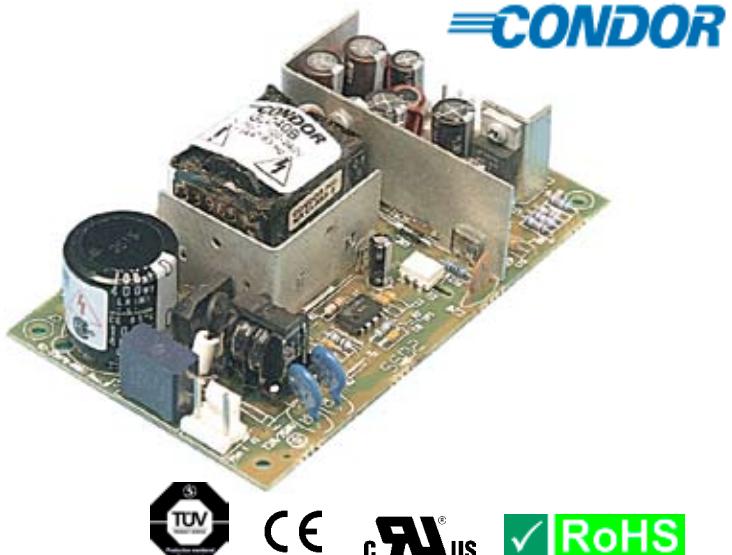

#### SPECIFICATIONS

Ac Input 90-264 Vac, 47-63 Hz single phase.	Voltage Setting Factory set on standard units with fixed resistors for added reliability. 3.3 V unit has voltage adjustment pot.						
Input Current Maximum input current at 120 Vac, 60 Hz with full rated output load not to exceed 1.3 A.	Efficiency 70% typical depending on model.						
Output Power Normal continuous output power is 40 W for unrestricted natural convection cooling, 45 W peak for 60 seconds. During peak load conditions output regulation may exceed total regulation and noise limits.	Turn-on Time Less than 1 second at 120 Vac, 25°C (inversely proportional to input voltage and thermistor temperature).						
Output Regulation Regulation for multiple-output models measured by $\pm 40\%$ load change from 60% rated load with all other outputs at 60% full rated load and a line voltage change from low line to high line. Initial set tolerance is measured with all outputs at 60% of full rated load. Output voltage V1 requires 1 A load for proper regulation of multiple output models. Regulation for single-output models measured by changing from 5% to 50% load or 50% load to full load in either direction.	Input Protection Internal ac fuse provided on all units. Designed to blow only if a catastrophic failure occurs in the unit. Fuse does not blow on overload or short circuit.						
Power Limit Factory set to begin power limiting at approximately 55 W. Fully protected against short circuit and output overload. Short circuit protection is cycling type power limit.	Inrush Current Inrush limited by internal thermistors. Inrush at 240 Vac, averaged over the first ac half-cycle under cold start conditions will not exceed 37 A.						
Output Noise 0.5% rms, 1% pk-pk, 20 MHz bandwidth, mode. Measured with noise probe terminals of the power supply.	Temperature Coefficient 0.03%/°C typical on all outputs.						
Transient Response Main Output: 500 $\mu$ s typical response time for return to within 0.5% of final value for a 50% load step change, $\Delta i / \Delta t < 0.2 \text{ A}/\mu\text{s}$ . Maximum voltage deviation is 3.5%. Startup/shutdown overshoot less than 3%.	EMI/EMC Compliance All models include built-in EMI filtering to meet the following emissions requirements:						
Overvoltage Protection Built in on V1 with firing point set per table. OVP firing reduces output #1 and #2 to less than 50% of nominal voltage in 50 ms.	<table border="1"> <thead> <tr> <th>EMI SPECIFICATIONS</th> <th>COMPLIANCE LEVEL</th> </tr> </thead> <tbody> <tr> <td>Conducted Emissions Static Discharge RF Field Susceptibility Fast Transients/Bursts Surge Susceptibility</td> <td>EN55022 Class A; FCC Class A EN61000-4-2, 6 kV contact, 8 kV air EN61000-4-3, 3 V/meter EN61000-4-4, 2 kV, 5 kHz EN61000-4-5, 1 kV diff, 2 kV com.</td> </tr> <tr> <td>Safety All GLC40 models are approved to UL1950, CSA-C22.2 No. 234 Level 3, IEC950 and EN60950. Class I input.</td> <td></td> </tr> </tbody> </table>	EMI SPECIFICATIONS	COMPLIANCE LEVEL	Conducted Emissions Static Discharge RF Field Susceptibility Fast Transients/Bursts Surge Susceptibility	EN55022 Class A; FCC Class A EN61000-4-2, 6 kV contact, 8 kV air EN61000-4-3, 3 V/meter EN61000-4-4, 2 kV, 5 kHz EN61000-4-5, 1 kV diff, 2 kV com.	Safety All GLC40 models are approved to UL1950, CSA-C22.2 No. 234 Level 3, IEC950 and EN60950. Class I input.	
EMI SPECIFICATIONS	COMPLIANCE LEVEL						
Conducted Emissions Static Discharge RF Field Susceptibility Fast Transients/Bursts Surge Susceptibility	EN55022 Class A; FCC Class A EN61000-4-2, 6 kV contact, 8 kV air EN61000-4-3, 3 V/meter EN61000-4-4, 2 kV, 5 kHz EN61000-4-5, 1 kV diff, 2 kV com.						
Safety All GLC40 models are approved to UL1950, CSA-C22.2 No. 234 Level 3, IEC950 and EN60950. Class I input.							

Commercial Model	Output No.	Output	Output Minimum	Output Maximum	V 1 OVP Set	Noise P-P	Total Regulation
GLC40AG	1	+ 5.1 V	1 A	3 A	+ 6.2 ± 0.6 V	50 mV	2%
	2	+ 12 V	0 A	2 A		120 mV	6%
	3	- 12 V	0 A	0.4 A		120 mV	5%
GLC40BG	1	+ 5.1 V	1 A	3 A	+ 6.2 ± 0.6 V	50 mV	2%
	2	+ 15 V	0 A	1.5 A		150 mV	6%
	3	- 15 V	0 A	0.4 A		150 mV	5%
GLC40DG	1	+5 V	1 A	3 A	+ 6.2 ± 0.6 V	50 mV	2%
	2	+24 V	0 A	1 A		240 mV	6%
	3	-12 V	0 A	0.4 A		120 mV	5%
GLC40-3.3G	1	3.3 V	0 A	8 A	4.2 ± 0.6 V	33 mV	2%
GLC40-5G	1	5 V	0 A	8 A	6.2 ± 0.6 V	50 mV	2%
GLC40-9G	1	9 V	0 A	4.4 A	11 ± 0.9 V	90 mV	2%
GLC40-12G	1	12 V	0 A	3.3 A	14 ± 1.1 V	120 mV	2%
GLC40-13.8G	1	13.8 V	0 A	2.9 A	17.7 +/- 1.5 V	138 mV	2%
GLC40-15G	1	15 V	0 A	2.7 A	18.5 ± 1.5 V	150 mV	2%
GLC40-24G	1	24 V	0 A	1.7 A	28.5 ± 2.5 V	240 mV	2%
GLC40-28G	1	28 V	0 A	1.4 A	34 ± 2.8 V	280 mV	2%

## GLC40 MECHANICAL SPECIFICATIONS

J1 CONNECTOR: AMP P/N 640445-3  
W/CENTER PIN REMOVED,  
0.156 [3.96mm] CTR HEADER

J2 CONNECTOR: AMP P/N 640445-6,  
0.156 [3.96mm] CTR HEADER

INPUT: J1  
PIN 1) AC LINE  
PIN 2) AC NEUTRAL  
PIN 3) GND

	J2	MULTI OUTPUT MODELS	SINGLE OUTPUT MODELS
PIN 1	OUTPUT #2	OUTPUT #1	
PIN 2	OUTPUT #1	OUTPUT #1	
PIN 3	OUTPUT #1	OUTPUT #1	
PIN 4	COMMON	COMMON	
PIN 5	COMMON	COMMON	
PIN 6	OUTPUT #3	COMMON	

MATING CONNECTORS AMP P/N


	HOUSING	CONTACT
INPUT	640250-3	770476-1
OUTPUT	640250-6	770476-1

NOTE: 5A MAXIMUM RECOMMENDED CURRENT PER CONNECTOR PIN

OPTIONAL ENCLOSURE (P/N 08-30466-1040)

WEIGHT: 1.0 LBS MAX. [0.45 kg MAX.]

TOLERANCES: X.XX=0.030 [0.76mm]  
X.XXX=0.010 [0.25mm]

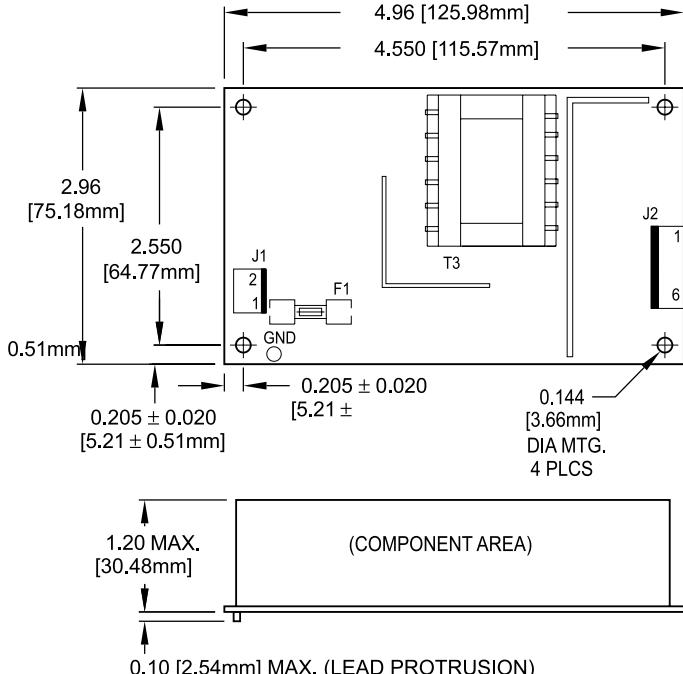

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## SL Power:

[GLC40-12](#) [GLC40-15](#) [GLC40-24](#) [GLC40-48](#) [GLC40-28](#) [GLC40-5](#) [GLC40-3.3](#) [GLC40A](#) [GLC40B](#) [GLC40D](#)  
[GLC40-48G](#) [GLC40-24G](#) [GLC40-28G](#) [GLC40-3.3G](#) [GLC40DG](#) [GLC40AG](#) [GLC40BG](#) [GLC40-15G](#) [GLC40-5G](#)  
[GLC40-12G](#) [GPC40-28](#) [GLC40-9G](#)