


# SPECIFICATION CONTROL DRAWING

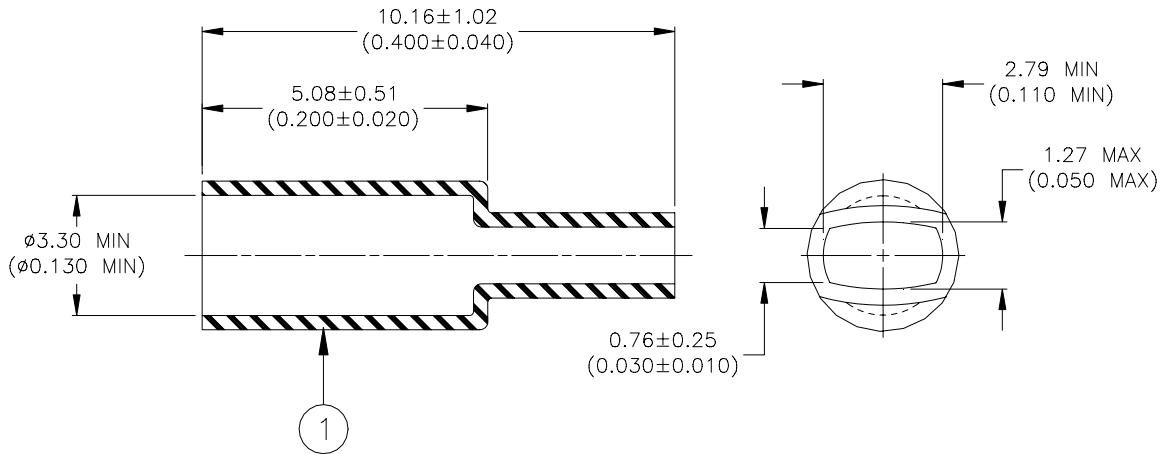

## MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.

## APPLICATION

1. This part is designed for insulating unterminated ends of shielding on cables having 24 to 16 AWG conductors.
2. This part is installed by abutting inner shoulder against cable jacket and heating in excess of 200°C until sleeve has recovered onto the jacket and conductor.
3. Maximum weight: 0.08 lbs./Mpc.

<b>tyco / Electronics / Raychem</b> 307 Constitution Drive Menlo Park, CA 94025, USA		<b>Wire and Harnessing Products</b>	<b>TITLE : PREFORM, FLOATING SHIELD INSULATOR</b>			
Unless otherwise specified dimensions are in millimeters. Inches dimensions are in between brackets.				<b>DOCUMENT NO.: D-306-38</b>		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D010120	REPLACES: N/A	
DRAWN BY: M. FORONDA	DATE: 11-Apr.-01	PROD. REV. E	DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[D-306-38](#)