

DUAL ENTRY SOLENOID KEY OPERATED SAFETY INTERLOCK NOMENCLATURE

GK

GK

BODY / INDICATOR		CONDUIT / SEAL		BASIC 		HEAD		KEY		TYPE / OVER-RIDE		SOLENOID VOLTAGE	MODIFICATION CODE 	
L	HEAD TO LEFT - WITH INDICATORS	A	1/2 NPT - VITON SEALS	2	2 SNAP ACTION DPDT	L	OPENING TO FRONT AND TOP	6	STRAIGHT	A	SOLENOID UNLOCK WITH SCREWDRIVER	1	12 VDC	F04
R	HEAD TO RIGHT - WITH INDICATORS	B	PG 13.5 - VITON SEALS	3	2 SLOW ACTING SPDT BBM	M	OPENING TO RIGHT AND TOP	7	90 DEGREE		SLOT OVER-RIDE	2	24 VDC	F05
F	HEAD TO LEFT - WITHOUT INDICATORS	C	20 MM - VITON SEALS	6	SLOW ACTING 2 NC	N	OPENING TO BACK AND TOP	8	UP - DOWN, SPRING LOADED	B	SOLENOID UNLOCK WITHOUT OVER-RIDE	3	48 VDC	FW
G	HEAD TO RIGHT - WITHOUT INDICATORS	D	PF 1/2 - VITON SEALS	10	SLOW ACTING 4 NC	P	OPENING TO LEFT AND TOP	9	SIDE - SIDE, SPRING LOADED	S	SOLENOID LOCK WITH SCREWDRIVER	4	120 VAC	
		E	1/2 NPT - BUNA-N SEALS	12	SLOW ACTING 2 NC - 1 NO BBM			X	NO KEY		SLOT OVER-RIDE	6	240 VAC	
		F	PG 13.5 - BUNA-N SEALS	14	SLOW ACTING 2 NC - 2 NO BBM					T	SOLENOID LOCK WITHOUT OVER-RIDE			
		G	20 MM - BUNA-N SEALS	15	SLOW ACTING 2 NC - 2 NO BBM - GOLD									
		H	PF 1/2 - BUNA-N SEALS	16	SLOW ACTING 3 NC - 1 NO BBM									
				30	2 SLOW ACTING 4 NC - GOLD									
				32	2 SLOW ACTING 2 NC - 1 NO BBM - GOLD									
				34	2 SLOW ACTING 2 NC - 2 NO BBM - GOLD									
				36	2 SLOW ACTING 3 NC - 1 NO BBM - GOLD									
				40	2 SLOW ACTING 4 NC									
				42	2 SLOW ACTING 2 NC - 1 NO BBM									
				44	2 SLOW ACTING 2 NC - 2 NO BBM									
				46	2 SLOW ACTING 3 NC - 1 NO BBM									

NOTES

- 1 - ZINC DIECAST BODY AND HEAD WITH STEEL COVER. BODY, HEAD AND COVER FINISHED WITH EPOXY PAINT
- 2 - PROVIDED WITH PLASTIC SNAP FIT COVER TO PLUG UNUSED KEY ENTRY WINDOW
-  THE LEFT INDICATOR IS GREEN AND THE RIGHT INDICATOR IS RED. NOT PRESENT ON BODY/INDICATOR CODES F OR G
- 4 - MAXIMUM OPERATING FREQUENCY (Fmax) = 100 OPS/MIN
- 5 - INSERTION FORCE = 35 N
- EXTRACTION FORCE = 28 N
- 6 LB
- MAXIMUM SOLENOID LOCKING FORCE = 1000 N
- 224 LB
-  ROTATE 1/4 TURN CLOCKWISE TO UNLOCK DEVICES WITH HEAD TO LEFT, SOLENOID UNLOCK AND DEVICES WITH HEAD TO RIGHT, SOLENOID LOCK. ROTATE 1/4 TURN COUNTERCLOCKWISE TO UNLOCK DEVICES WITH HEAD TO LEFT, SOLENOID LOCK AND DEVICES WITH HEAD TO RIGHT, SOLENOID UNLOCK.
-  NOT PRESENT ON TYPE/OVER-RIDE CODES B OR T
-  SWITCH MUST OPERATE BEFORE REACHING MINIMUM INSERTION DISTANCE
- 8 - T-15 TAMPERPROOF TORX DRIVER BIT PROVIDED
-  ELECTRICAL RATINGS ARE FOR BASIC SWITCHES
- 10 - MINIMUM SOLENOID VOLTAGE = 80% DC / 85% AC OF RATED VOLTAGE
- MAXIMUM SOLENOID VOLTAGE = 110% OF RATED VOLTAGE
- SOLENOID POWER = 12 WATTS NOMINAL
-  SEE PAGES 10, 11, 12 AND 13 FOR CIRCUIT DIAGRAMS
- 12 - NO CHANGES CAN BE MADE TO THIS DRAWING WITHOUT JOINT FREEPORT / NEWHOUSE APPROVAL
-  THE LEFT INDICATOR IS YELLOW AND THE RIGHT INDICATOR IS RED
-  10-PIN CONNECTOR, BRAD HARRISON PART NO.3RI006AZIF010 OR EQUIVALENT
-  4-PIN CONNECTOR, WOODHEAD PART NO.80599-19 OR MOLEX PART NO.08631MZ1 OR EQUIVALENT
-  5-PIN CONNECTOR, BRAD HARRISON PART NO.41310 OR EQUIVALENT
-  CONNECTOR INSTALLED IN BOTTOM CONDUIT HOLE
-  CONNECTOR INSTALLED IN SIDE CONDUIT HOLE
-  FOR CONNECTOR AND CIRCUIT DETAILS OF MODIFICATION CODE, REFER PAGE 14 FOR CODE F05, PAGE 15 FOR CODE FW AND PAGE 16 FOR CODE F04

ELECTRICAL RATING 				ENVIRONMENTAL RATINGS		APPROVALS
AC		DC		IP68 NEMA 1, 4, 6P, 12 & 13		   IEC 947-5-1 EN60947-5-1
A300	AC 15	Q300	DC 13	TEMP RANGE -25°C TO 40°C		
Ue	Ie	Ue	Ie	-13°F TO 104°F		
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)	STORAGE -40°C TO 120°C		
120	6	24	2.9	-40°F TO 248°F		
240	3	125	.55	SHOCK: 50G PER IEC 68-2-27		
		250	.27	VIBRATION: 10G PER IEC 68-2-6		
Ith = 10 A						

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

 **MICRO SWITCH**
a Honeywell Division

CATALOG LISTING

SWITCH - DOOR INTERLOCK

GK SERIES CHART 4

DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY

WEIGHT 1,5 kg / 3,3 LB




THIRD ANGLE PROJECTION

SCALE NTS

DO NOT SCALE PRINT




TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1

NO PLACES	ONE PLACE	TWO PLACES	THREE PLACES	FOUR PLACES
0.00	0.00	0.00	0.00	0.00
0.00	0.00	0.00	0.00	0.00
0.00	0.00	0.00	0.00	0.00
0.00	0.00	0.00	0.00	0.00

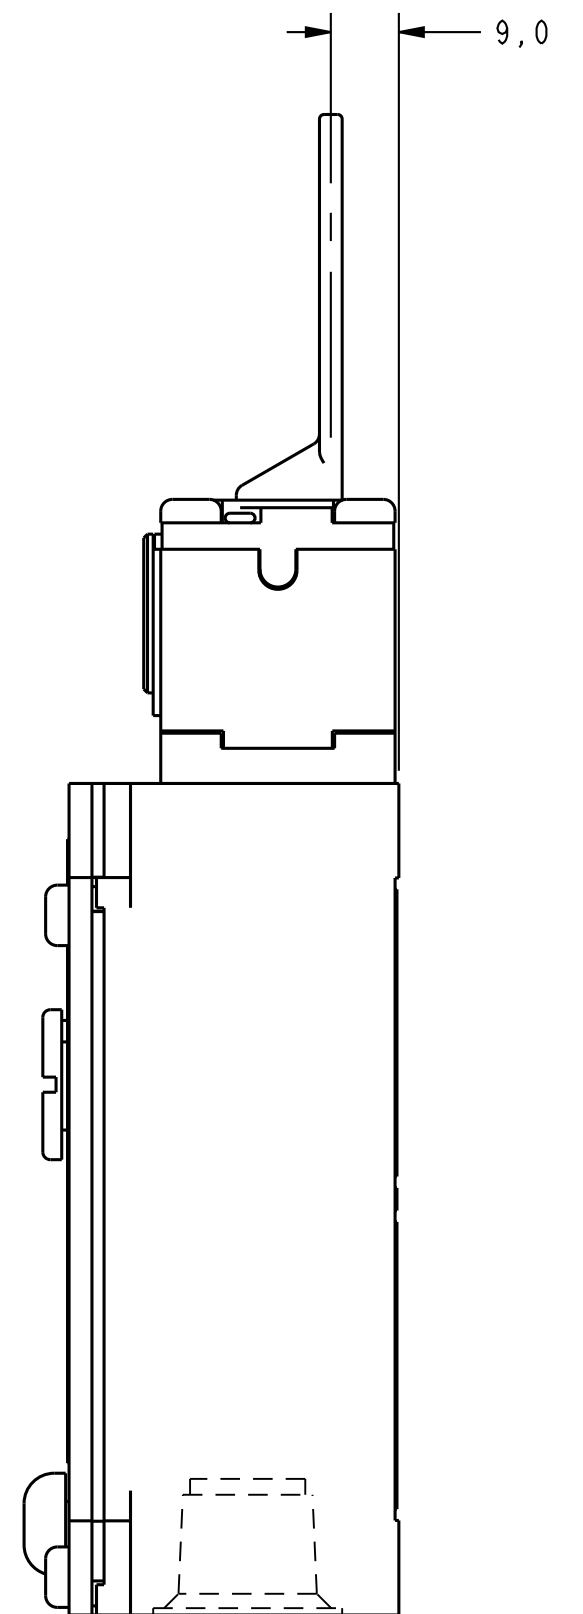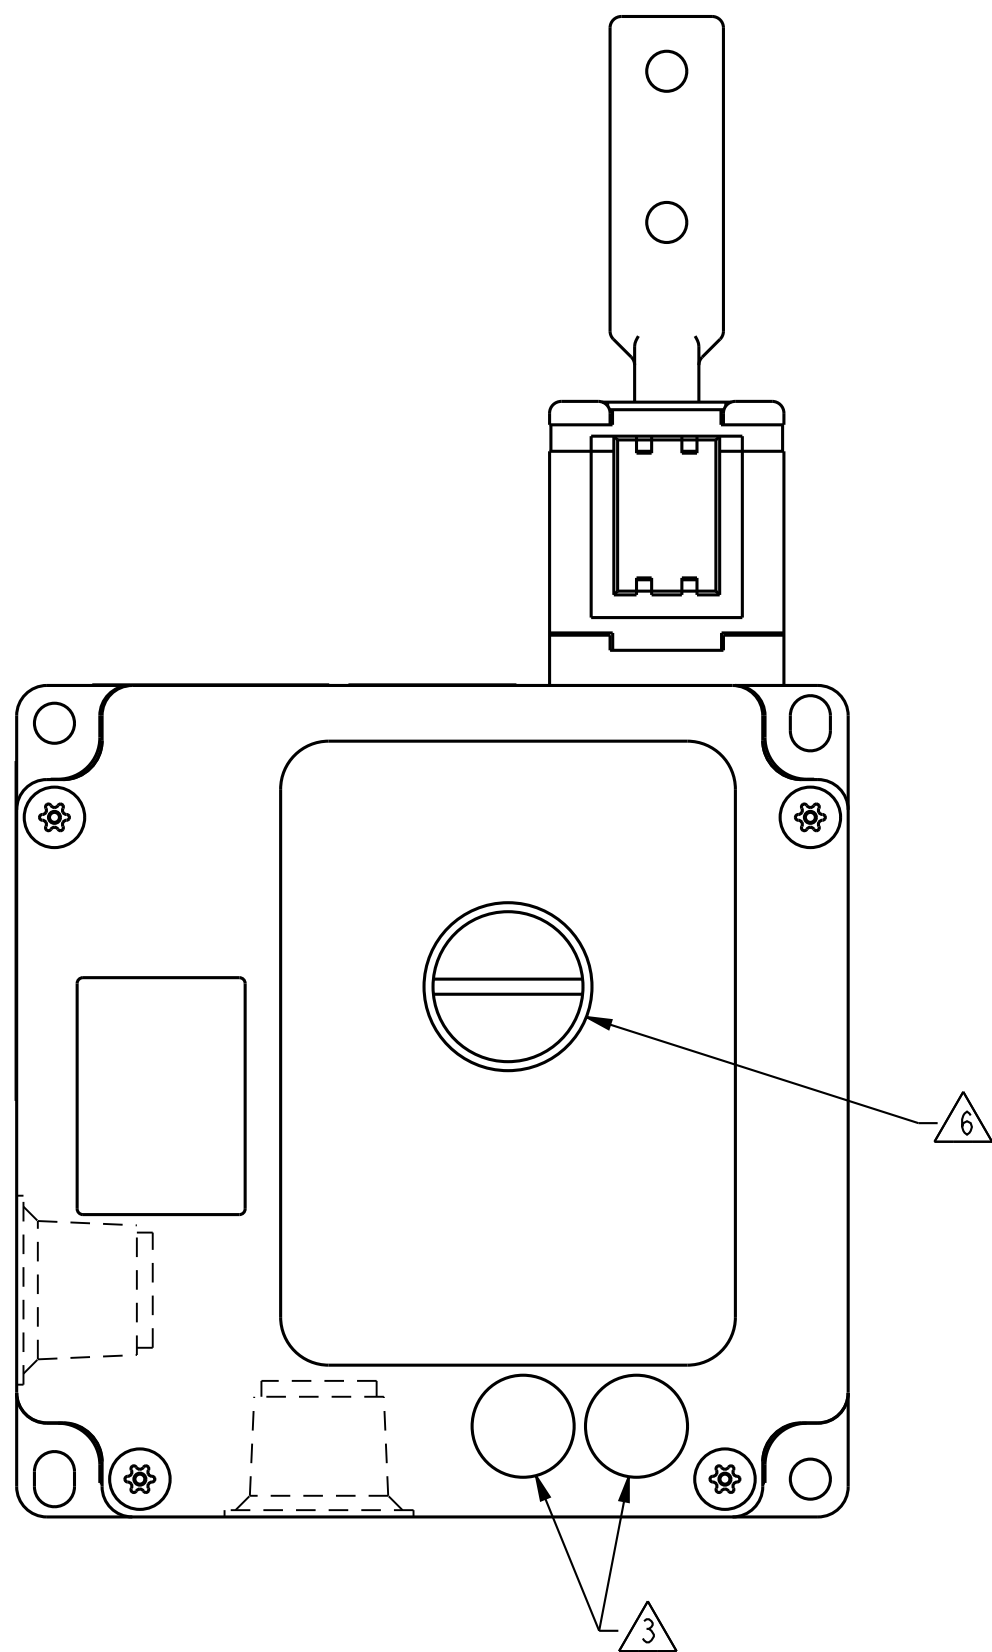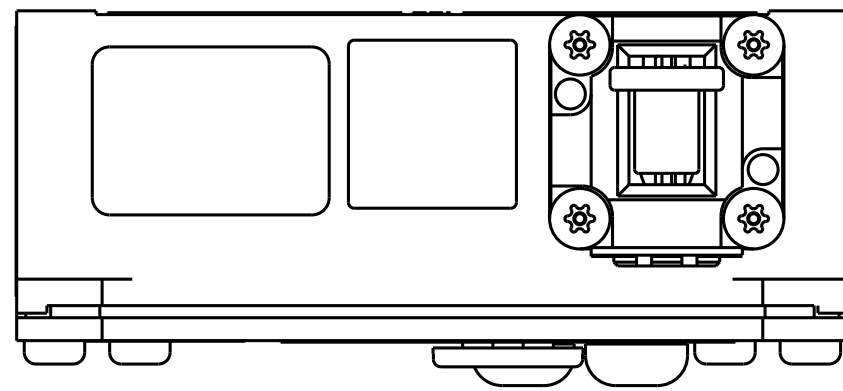

TOP KEY ENTRY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			<table border="1"> <tr> <td>NO PLACES</td> <td>1</td> <td>1.04</td> <td>1.1</td> <td>8.87.03</td> </tr> <tr> <td>ONE PLACE</td> <td>2.1</td> <td>0.47.016</td> <td>2.1</td> <td>3.86.015</td> </tr> <tr> <td>TWO PLACES</td> <td>3.1</td> <td>1.17.004</td> <td>3.1</td> <td>1.121.005</td> </tr> </table>		NO PLACES	1	1.04	1.1	8.87.03	ONE PLACE	2.1	0.47.016	2.1	3.86.015	TWO PLACES	3.1	1.17.004	3.1	1.121.005
NO PLACES	1	1.04	1.1	8.87.03															
ONE PLACE	2.1	0.47.016	2.1	3.86.015															
TWO PLACES	3.1	1.17.004	3.1	1.121.005															
FED. MFG. CODE 91929	CATALOG LISTING		<table border="1"> <tr> <td>DESIGN UNITS</td> <td> <table border="1"> <tr> <td>SI METRIC</td> <td>☒</td> </tr> <tr> <td>US CUSTOMARY</td> <td>☐</td> </tr> </table> </td> </tr> </table>		DESIGN UNITS	<table border="1"> <tr> <td>SI METRIC</td> <td>☒</td> </tr> <tr> <td>US CUSTOMARY</td> <td>☐</td> </tr> </table>	SI METRIC	☒	US CUSTOMARY	☐									
DESIGN UNITS	<table border="1"> <tr> <td>SI METRIC</td> <td>☒</td> </tr> <tr> <td>US CUSTOMARY</td> <td>☐</td> </tr> </table>	SI METRIC	☒	US CUSTOMARY	☐														
SI METRIC	☒																		
US CUSTOMARY	☐																		
MICRO SWITCH a Honeywell Division	SWITCH - DOOR INTERLOCK	GK SERIES CHART 4	WEIGHT 1,5 kg / 3.3 LB																

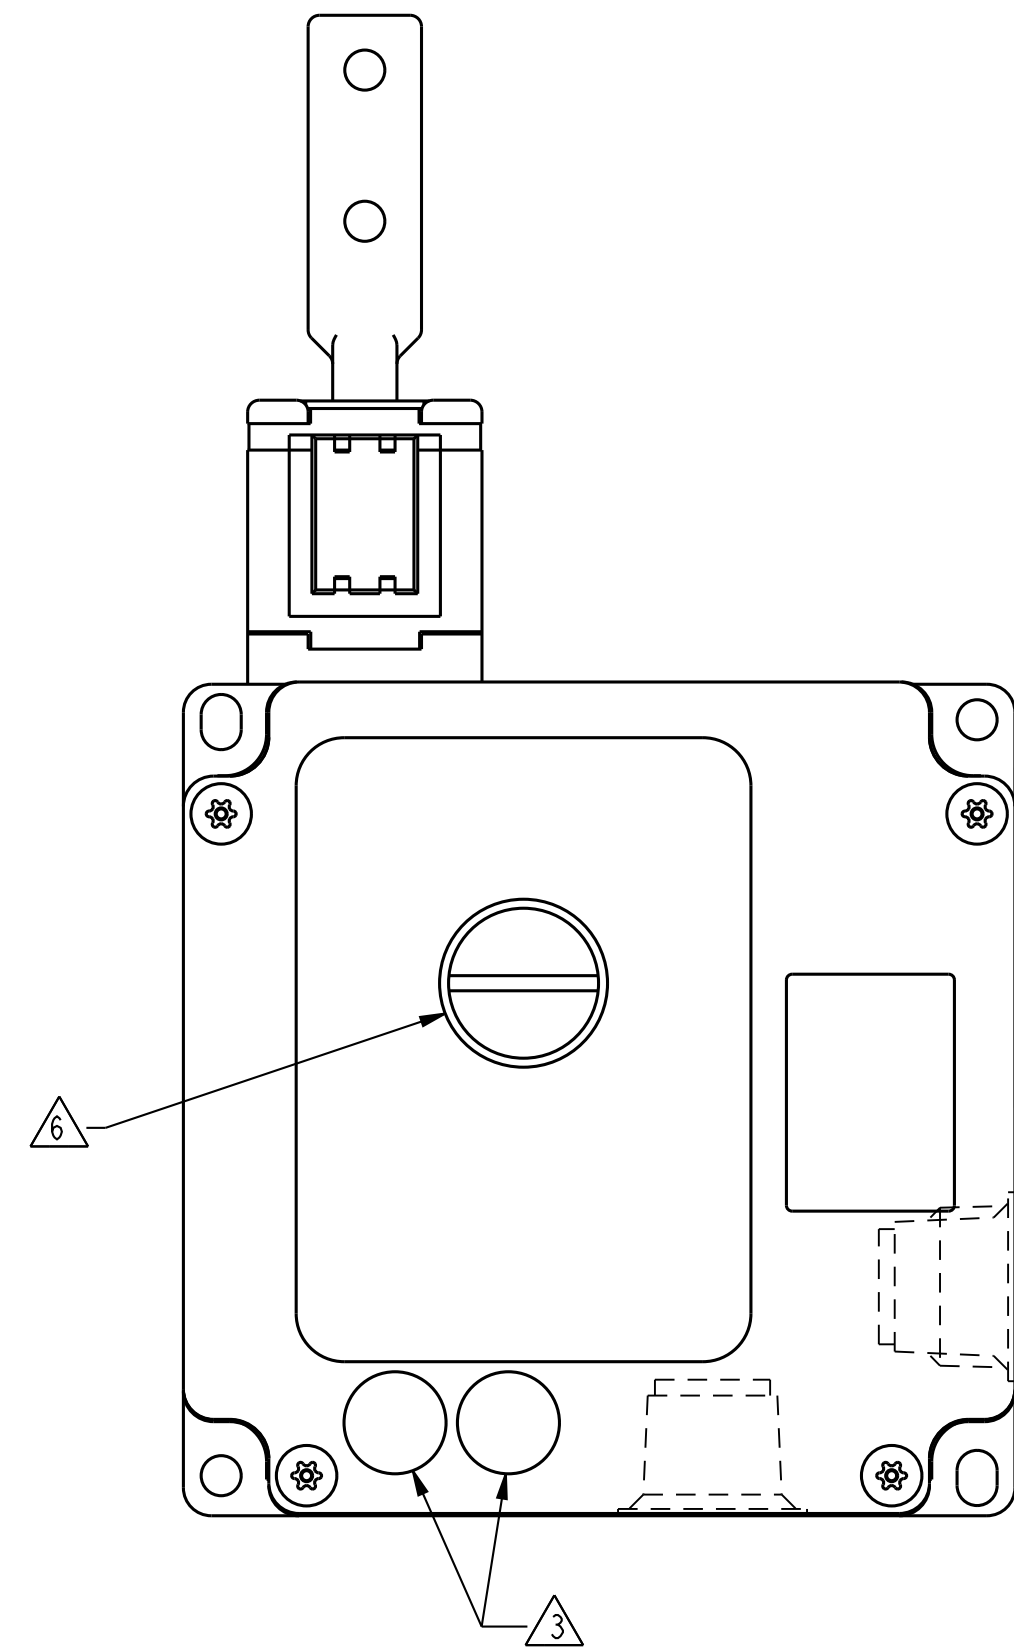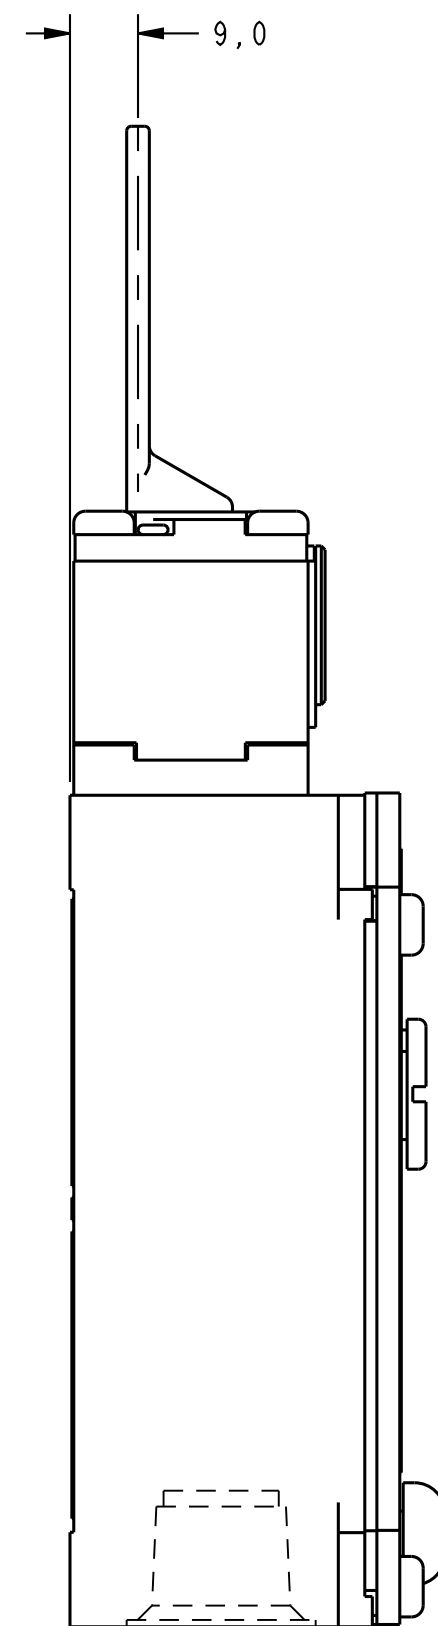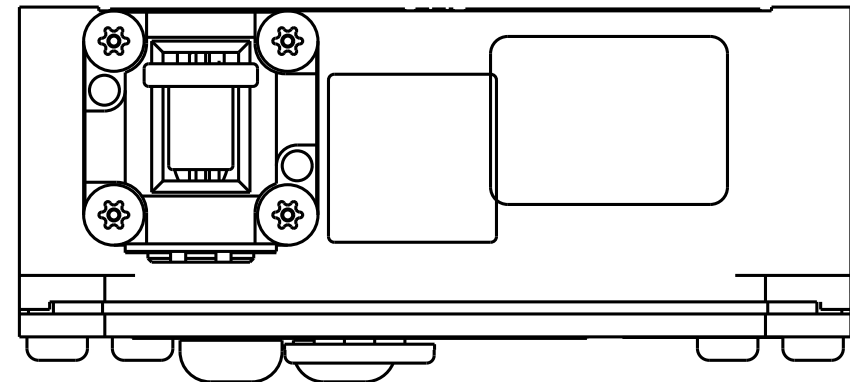


TOP KEY ENTRY

FRONT KEY ENTRY


BODY / INDICATOR CODES L OR F

[illegible]

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		DIM. TOL. mm mm / in.	
FED. MFG. CODE 91929	CATALOG LISTING	NO PLACES ONE PLACE TWO PLACES THREE PLACES ANGLES	0.00 / 0.0 0.47 / 0.018 0.157 / 0.006 0.157 / 0.006
MICRO SWITCH a Honeywell Division	SWITCH - DOOR INTERLOCK	SI METRIC US CUSTOMARY	
		DESIGN UNITS ☒	
		WEIGHT 1,5 kg / 3.3 LB	


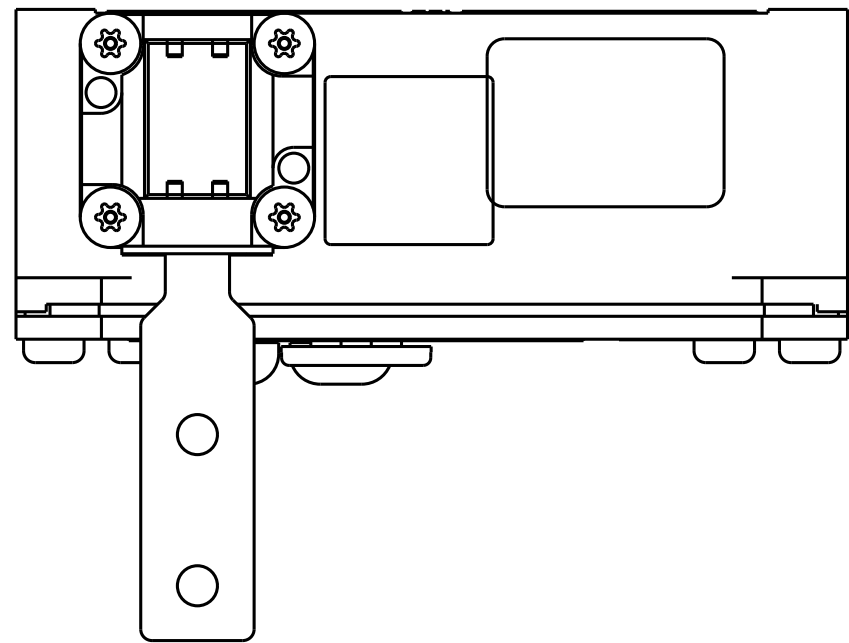


WITH KEY IN FRONT ENTRY POSITION

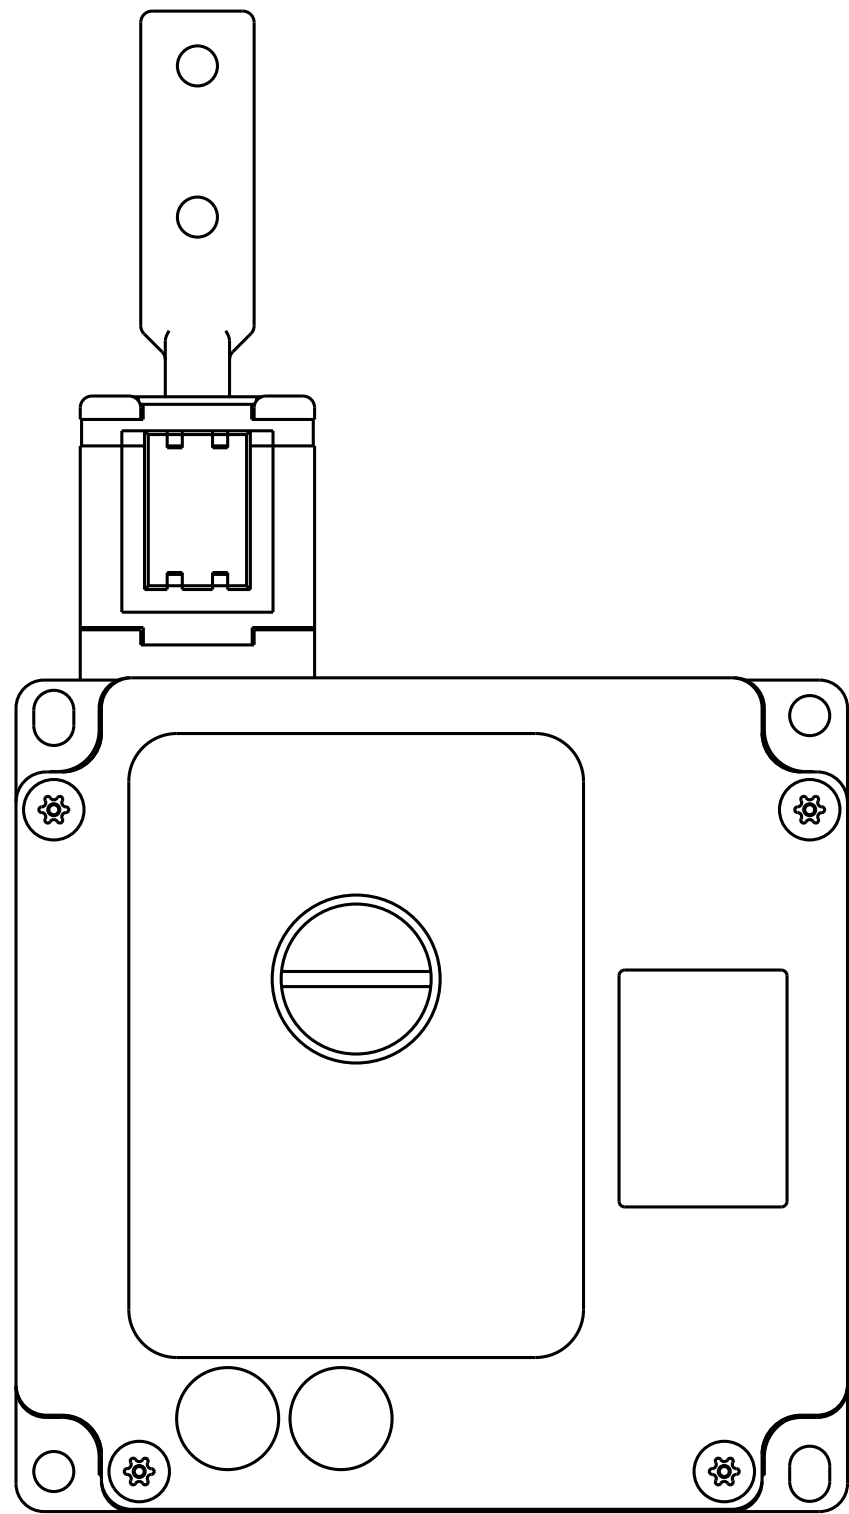


WITH KEY IN TOP ENTRY POSITION

HEAD CODE L

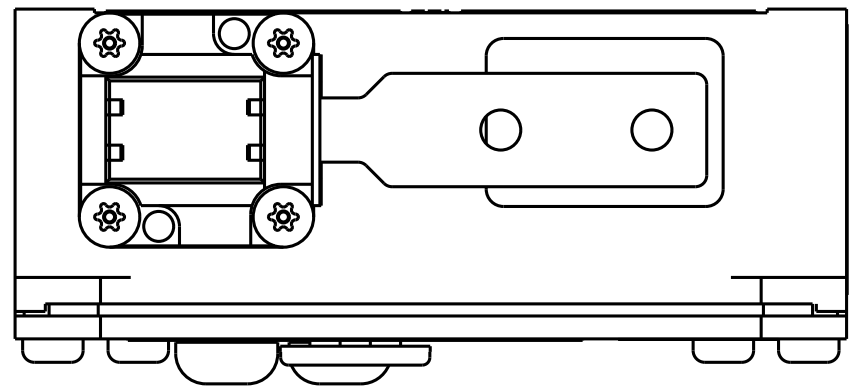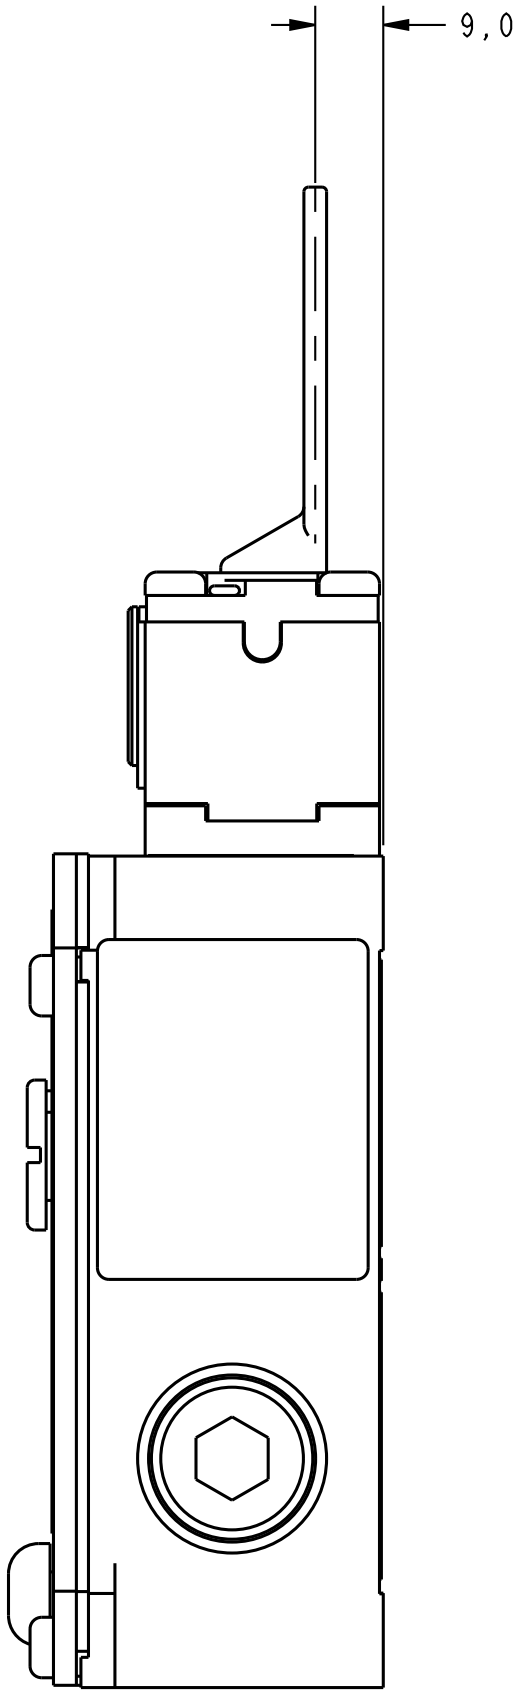


WITH KEY IN FRONT ENTRY POSITION

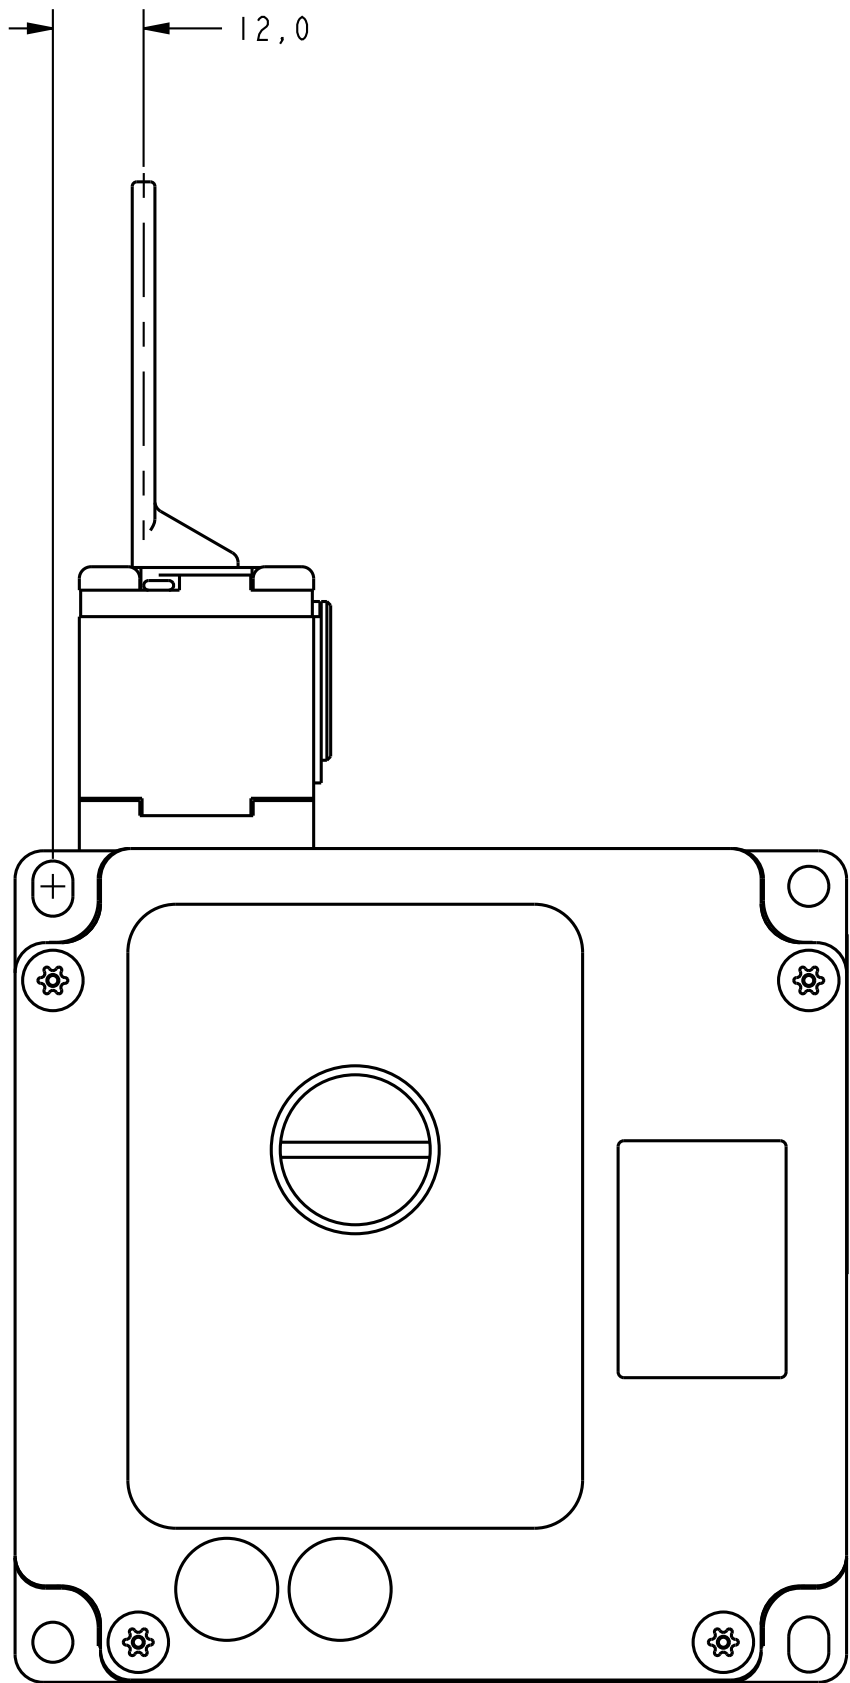


WITH KEY IN TOP ENTRY POSITION


HEAD CODE M

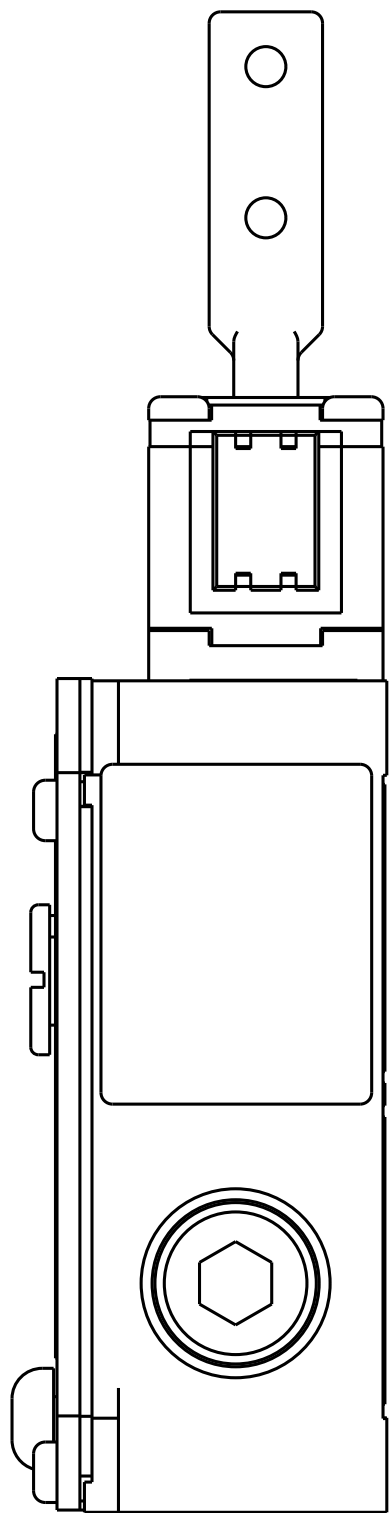

M


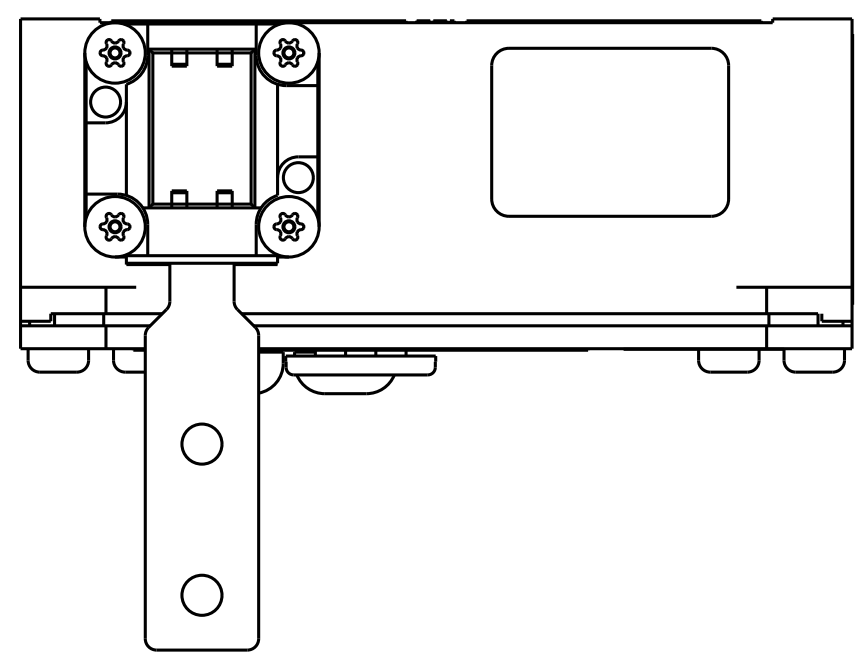


WITH KEY IN FRONT ENTRY POSITION

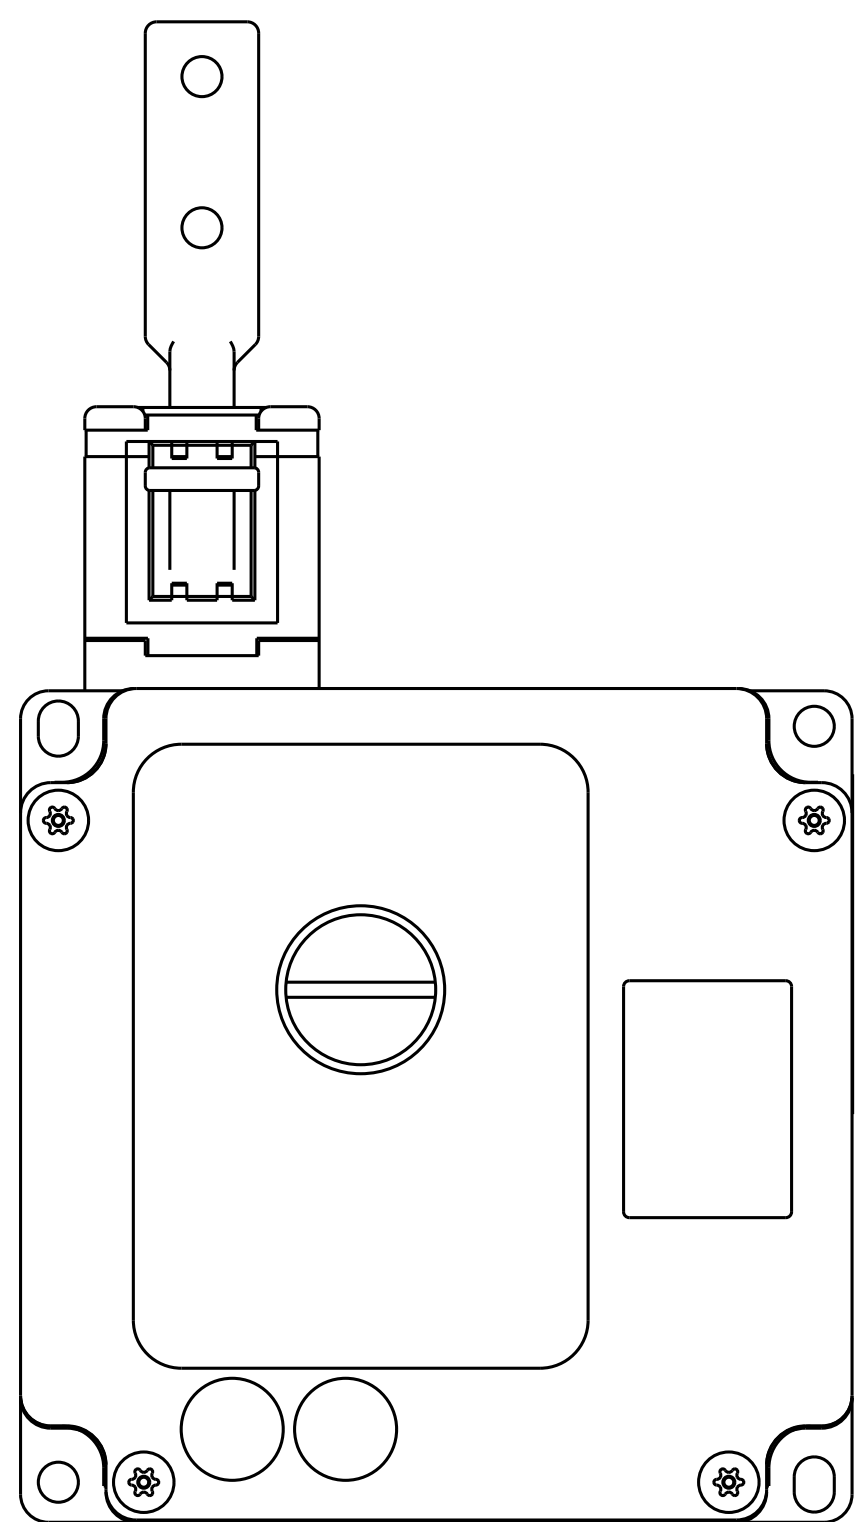


WITH KEY IN TOP ENTRY POSITION

HEAD CODE N

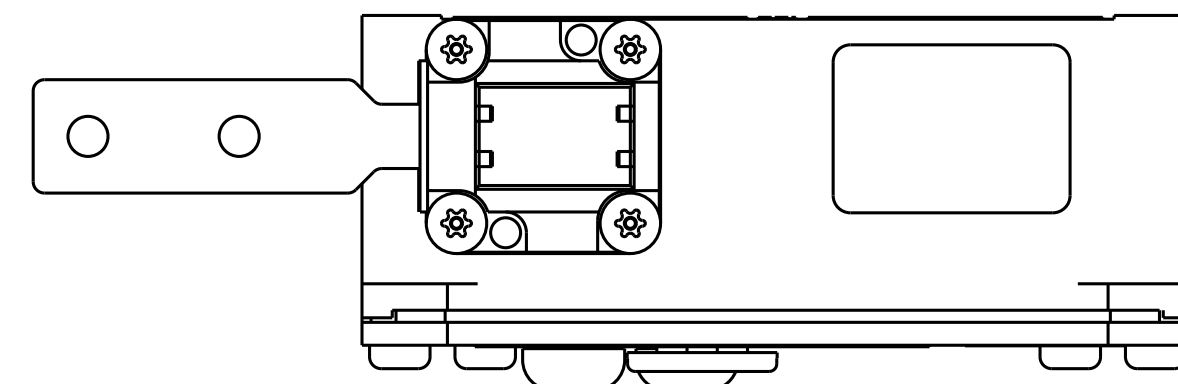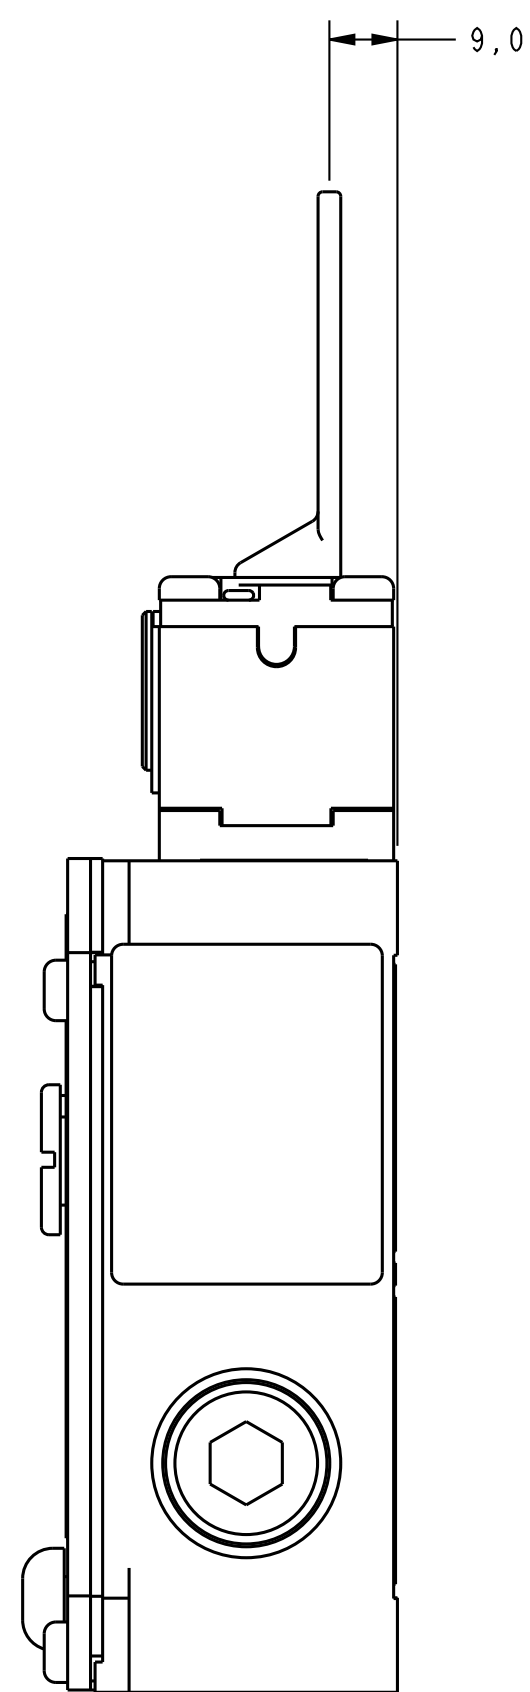

WITH KEY IN FRONT ENTRY POSITION

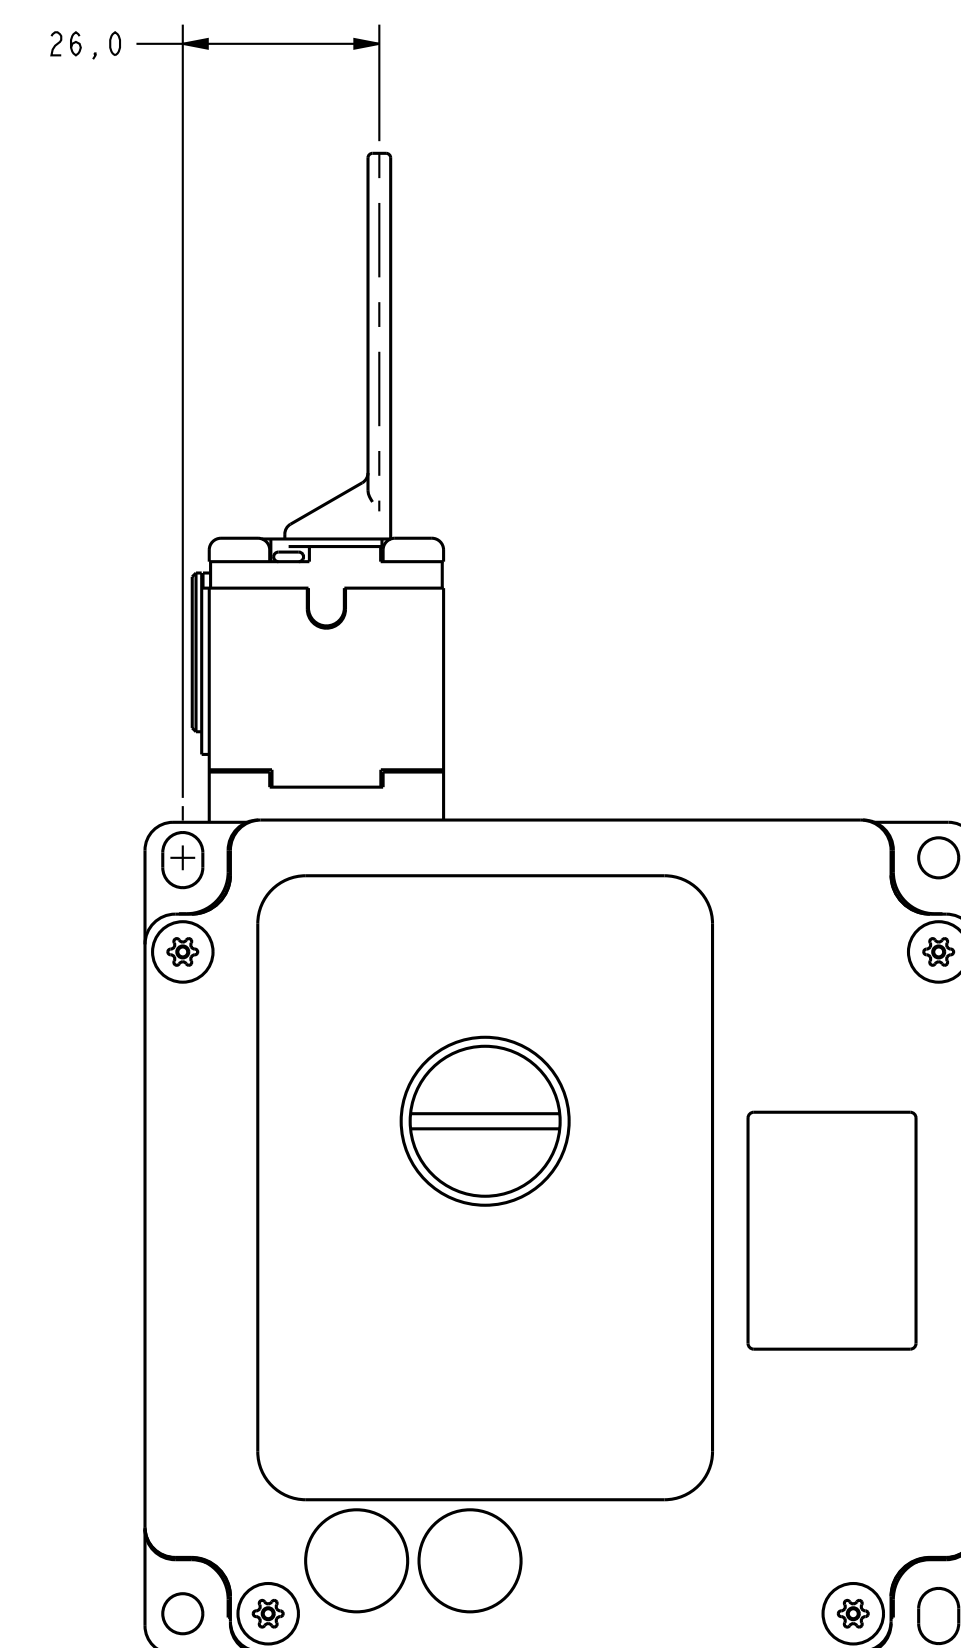





WITH KEY IN TOP ENTRY POSITION

HEAD CODE P


[illegible]

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		DIM. TOL. DIA. DIA. NO PLACES 0.1 / .04 ONE PLACE 0.1 / .01 TWO PLACES 0.01 / .006 THREE PLACES 0.131 / .006 ANGLES 0.131 / .005	
FED. MFG. CODE 91929	CATALOG LISTING		SI METRIC US CUSTOMARY DESIGN UNITS ☒ ☐
 MICRO SWITCH a Honeywell Division	SWITCH - DOOR INTERLOCK		GK SERIES CHART 4
			WEIGHT 1.5 KC 1.2 2 1.0


KEY CODE 6

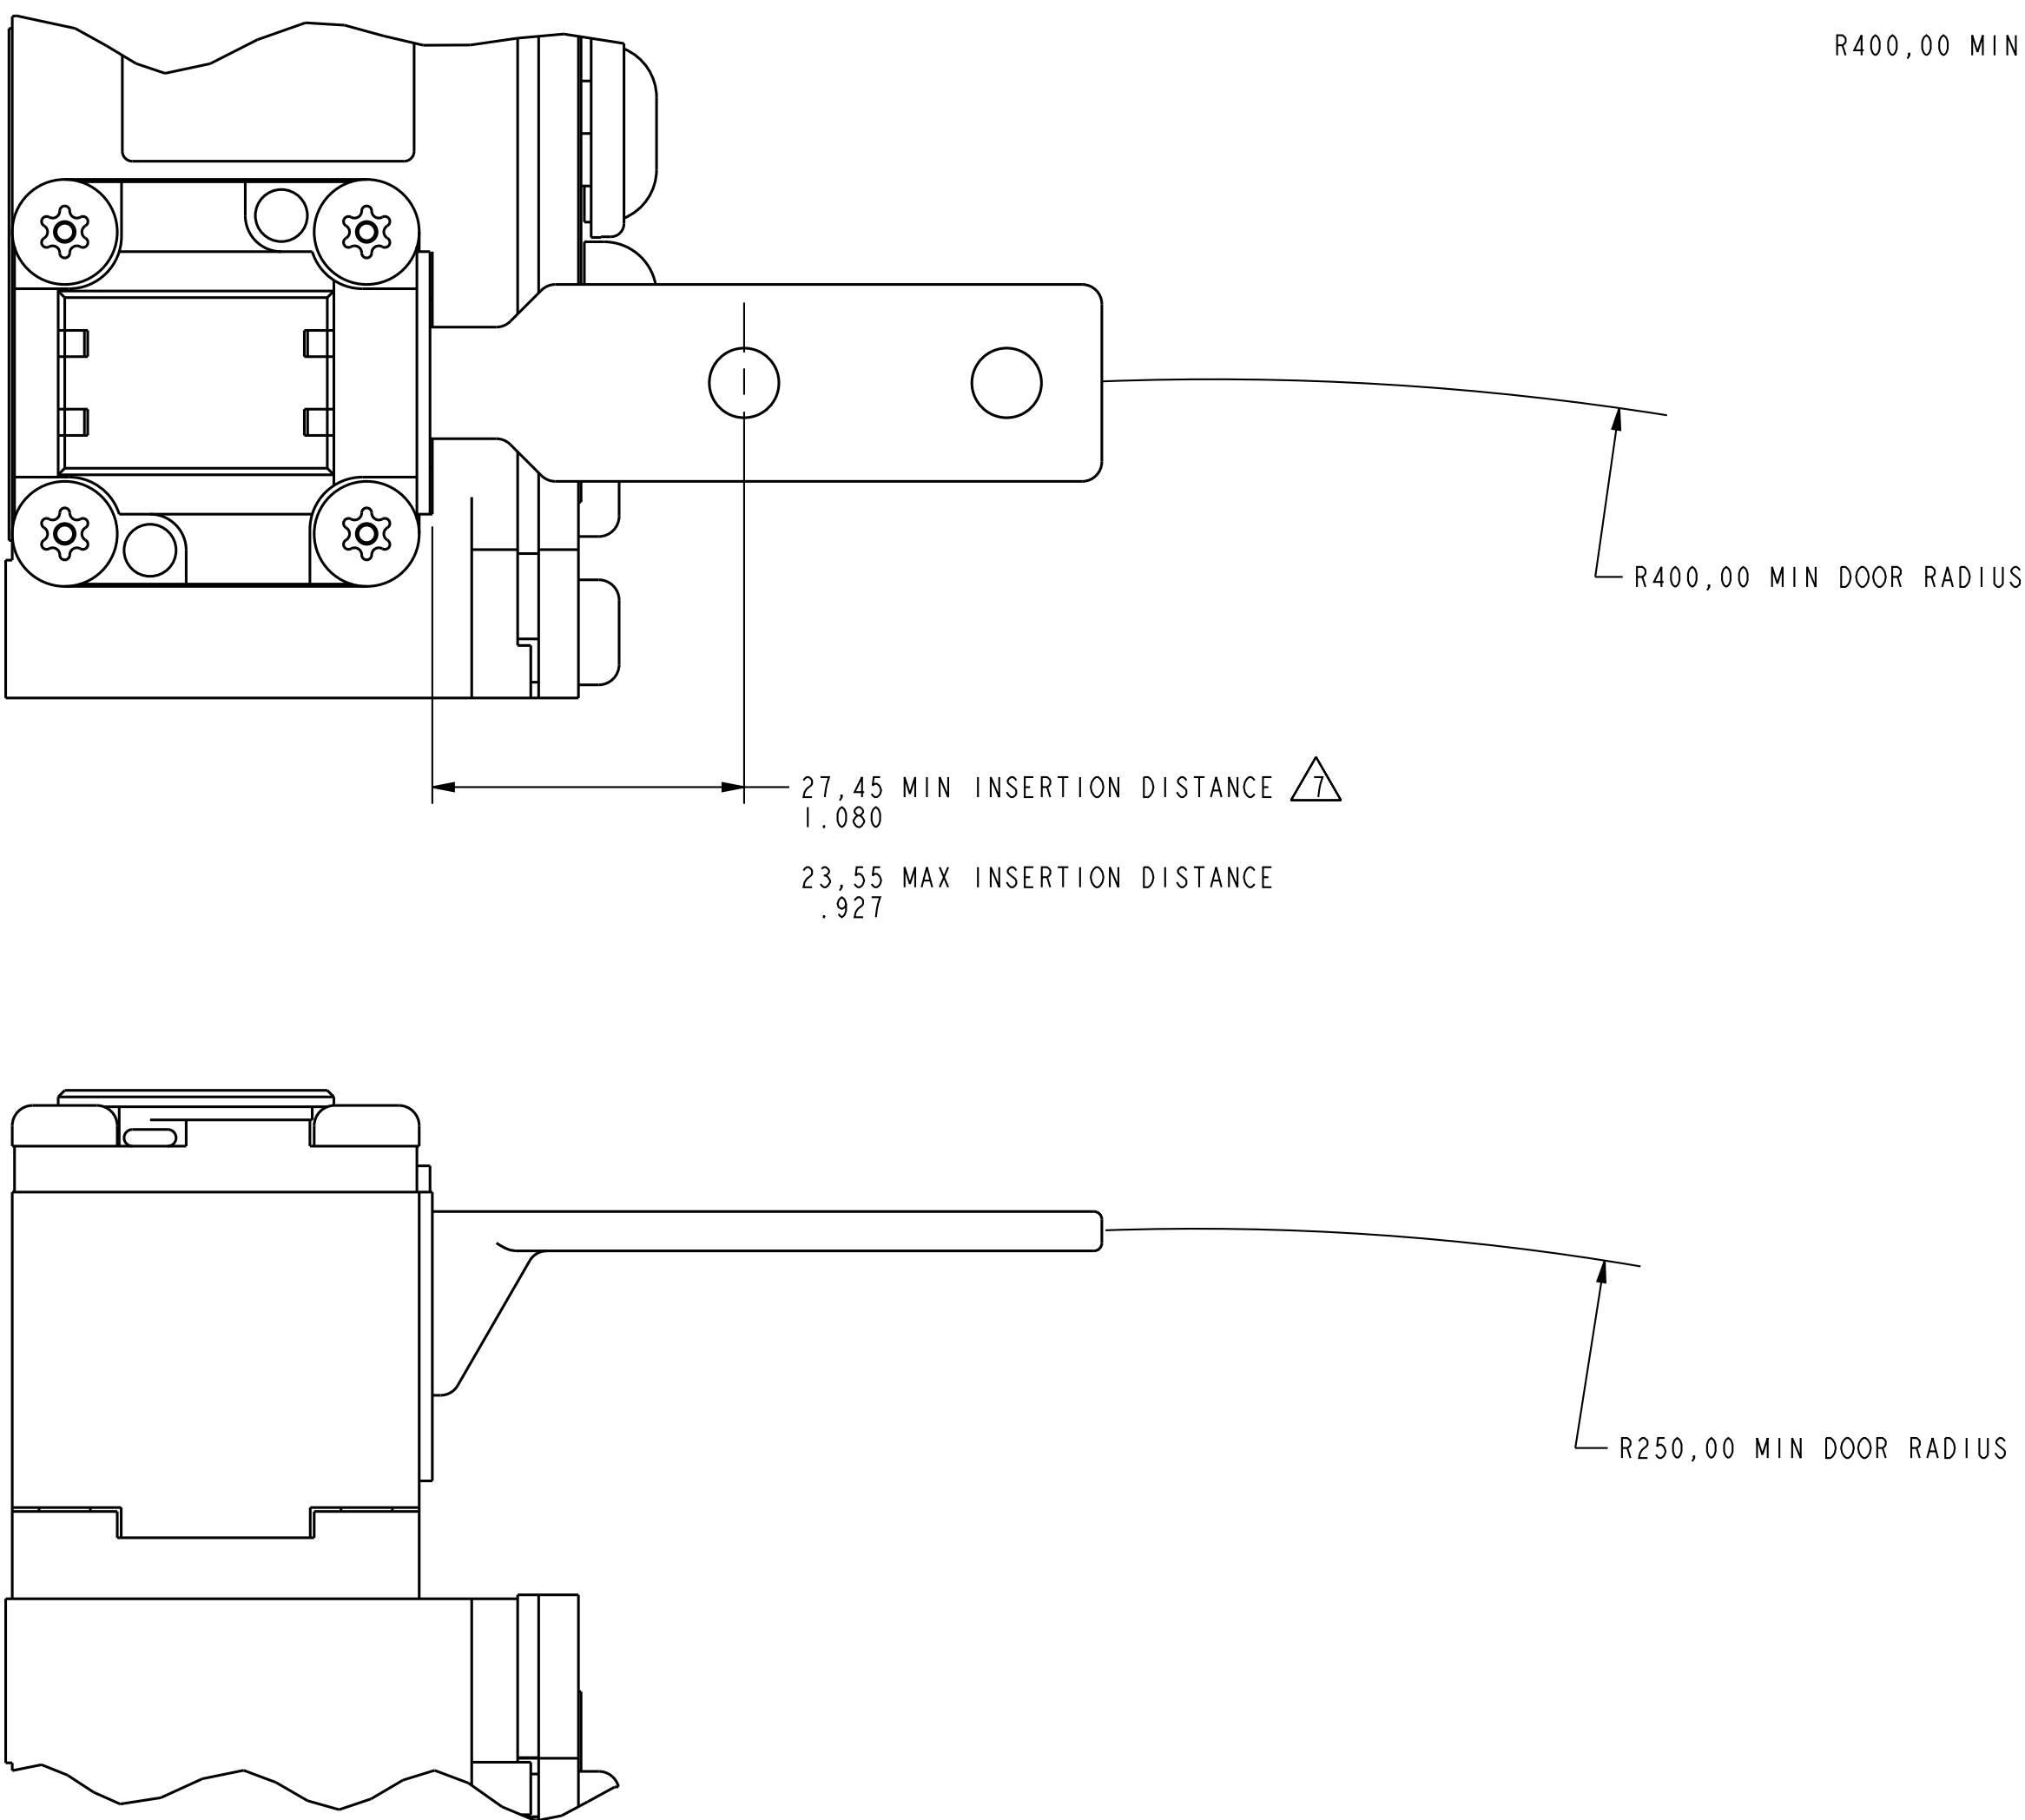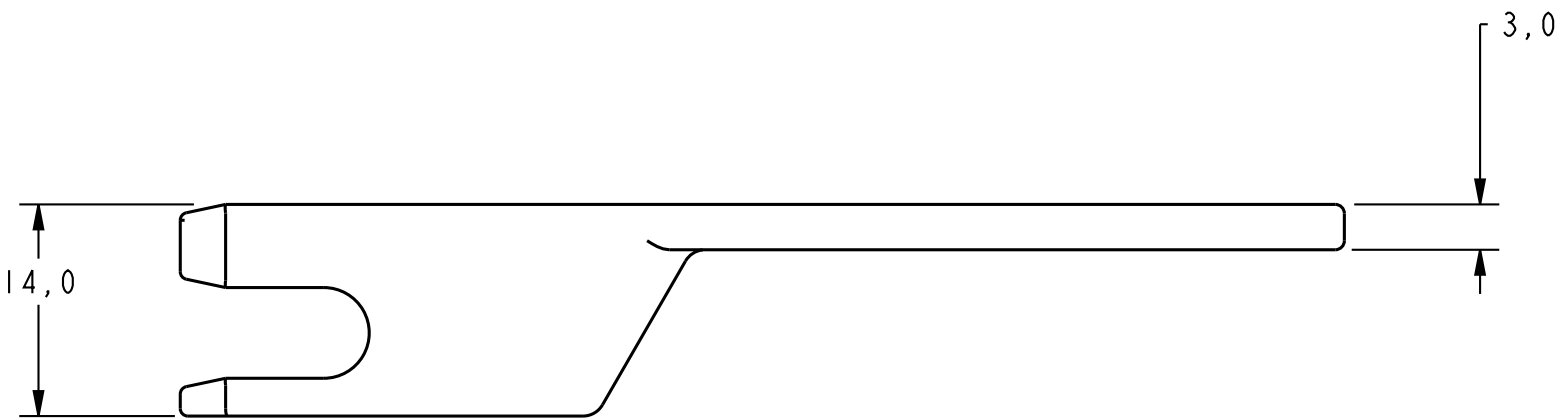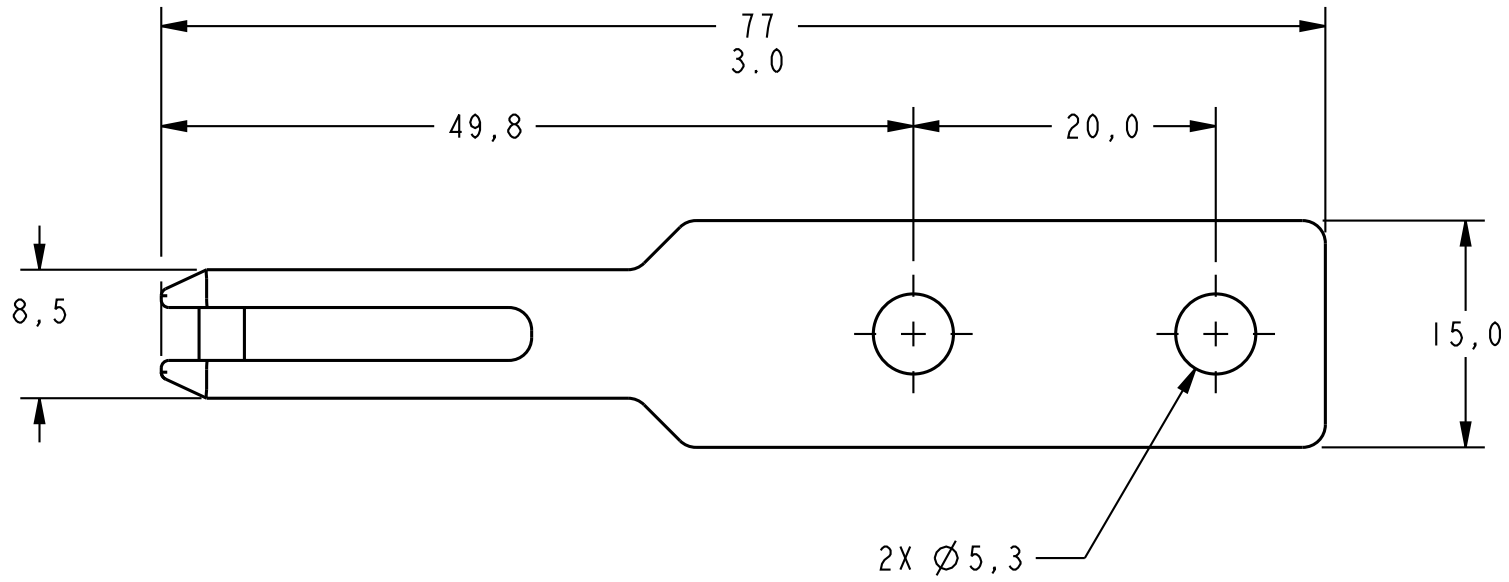

FRONT KEY ENTRY

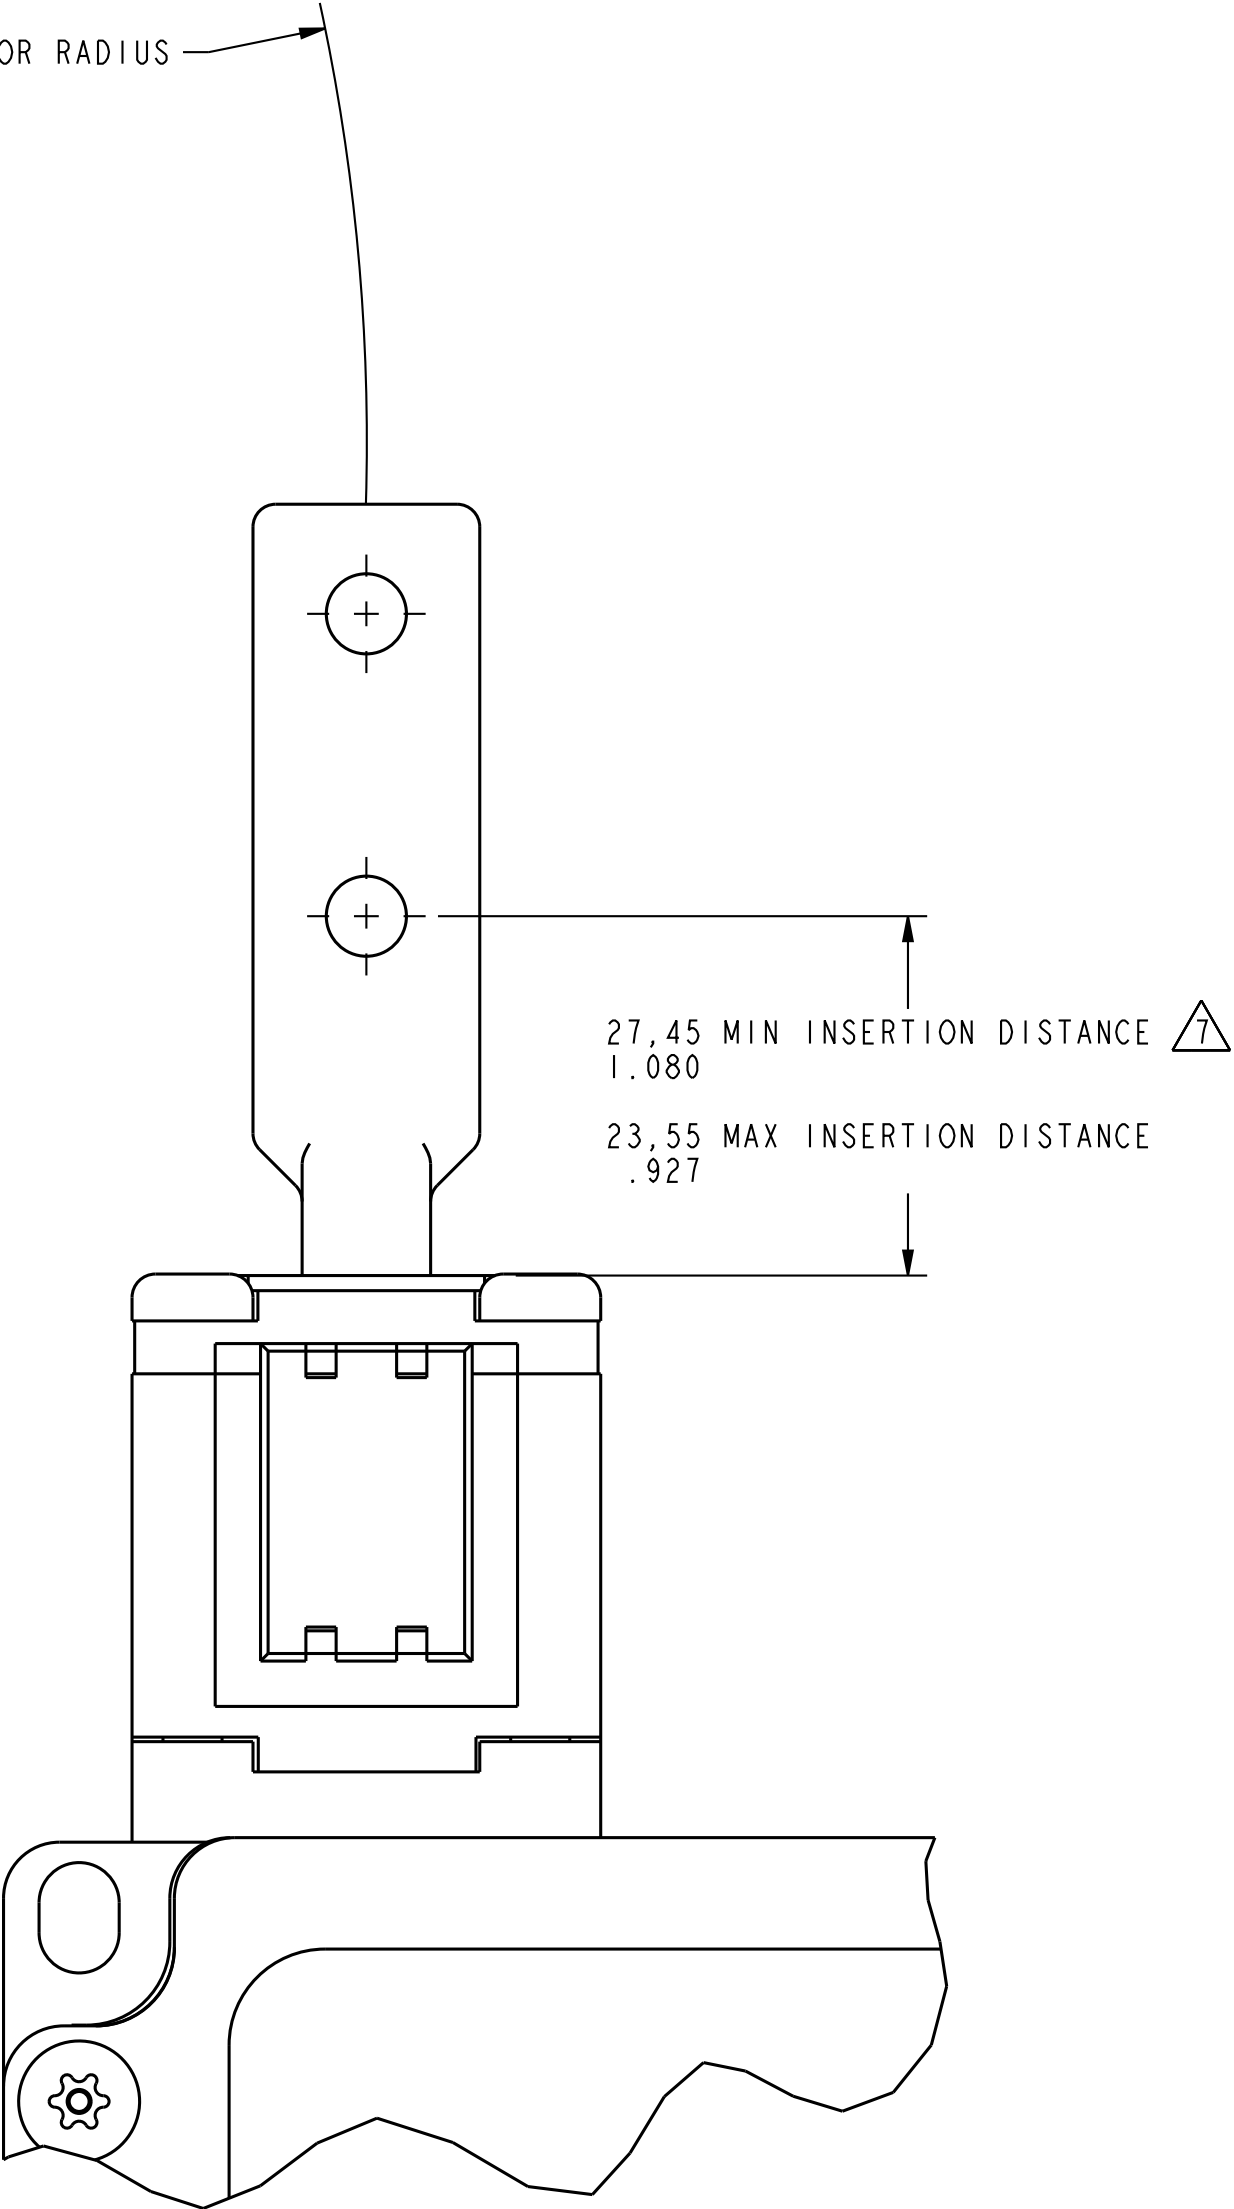


TOP KEY ENTRY


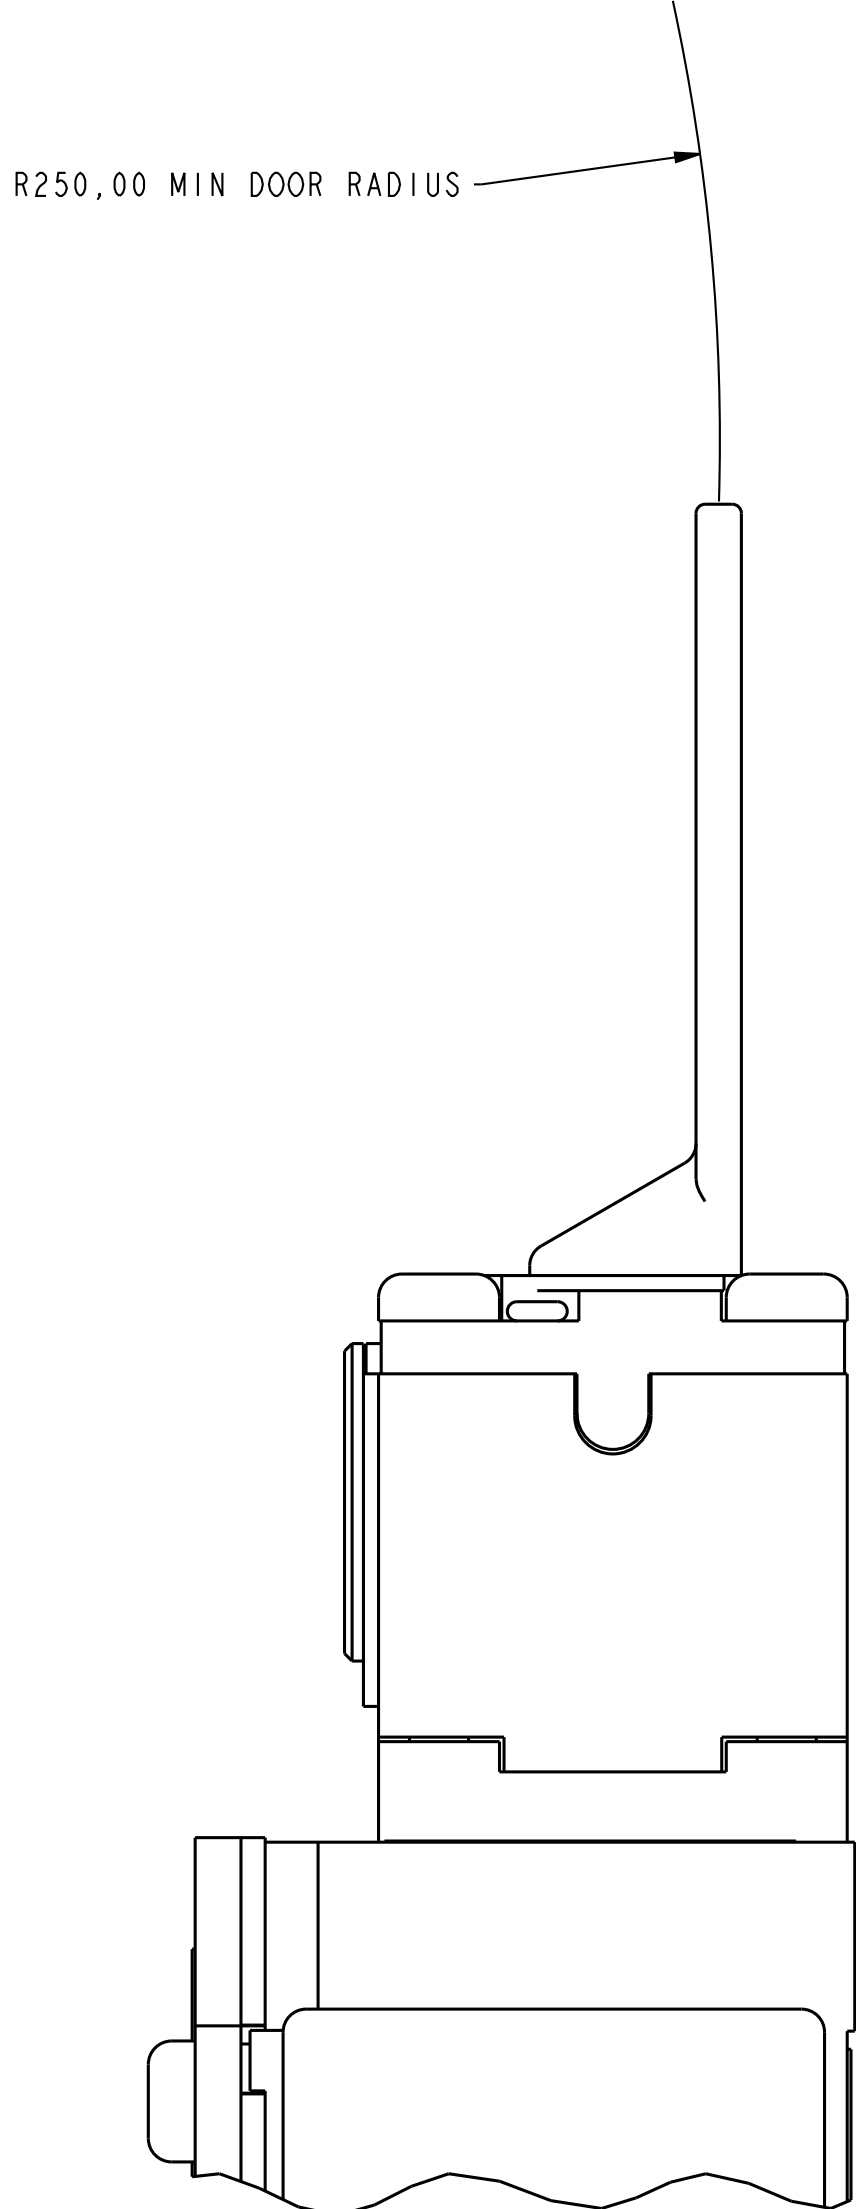


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.				CATALOG LISTING			
FED. MFG. CODE 91929		MICRO SWITCH a Honeywell Division		SWITCH - DOOR INTERLOCK		GK SERIES CHART 4	
DESIGN UNITS		SI METRIC		US CUSTOMARY		WEIGHT 1.5 KG / 3.3 LB	
NO PLACES		TOL.		TOL.		TOL.	
ONE PLACE		0.13/.04		0.01/.016		0.001/.005	
TWO PLACES		0.01/.006		0.001/.005		0.001/.005	
THREE PLACES		0.001/.005		0.001/.005		0.001/.005	
ANGLES		°		°		°	
DESIGN UNITS		SI METRIC		US CUSTOMARY		WEIGHT 1.5 KG / 3.3 LB	
SCALE		2 : 1		DO NOT SCALE PRINT		TOLERANCES	
THIRD ANGLE PROJECTION		APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1		DO NOT SCALE PRINT		TOLERANCES	
SCALE		2 : 1		DO NOT SCALE PRINT		TOLERANCES	



KEY CODE 7

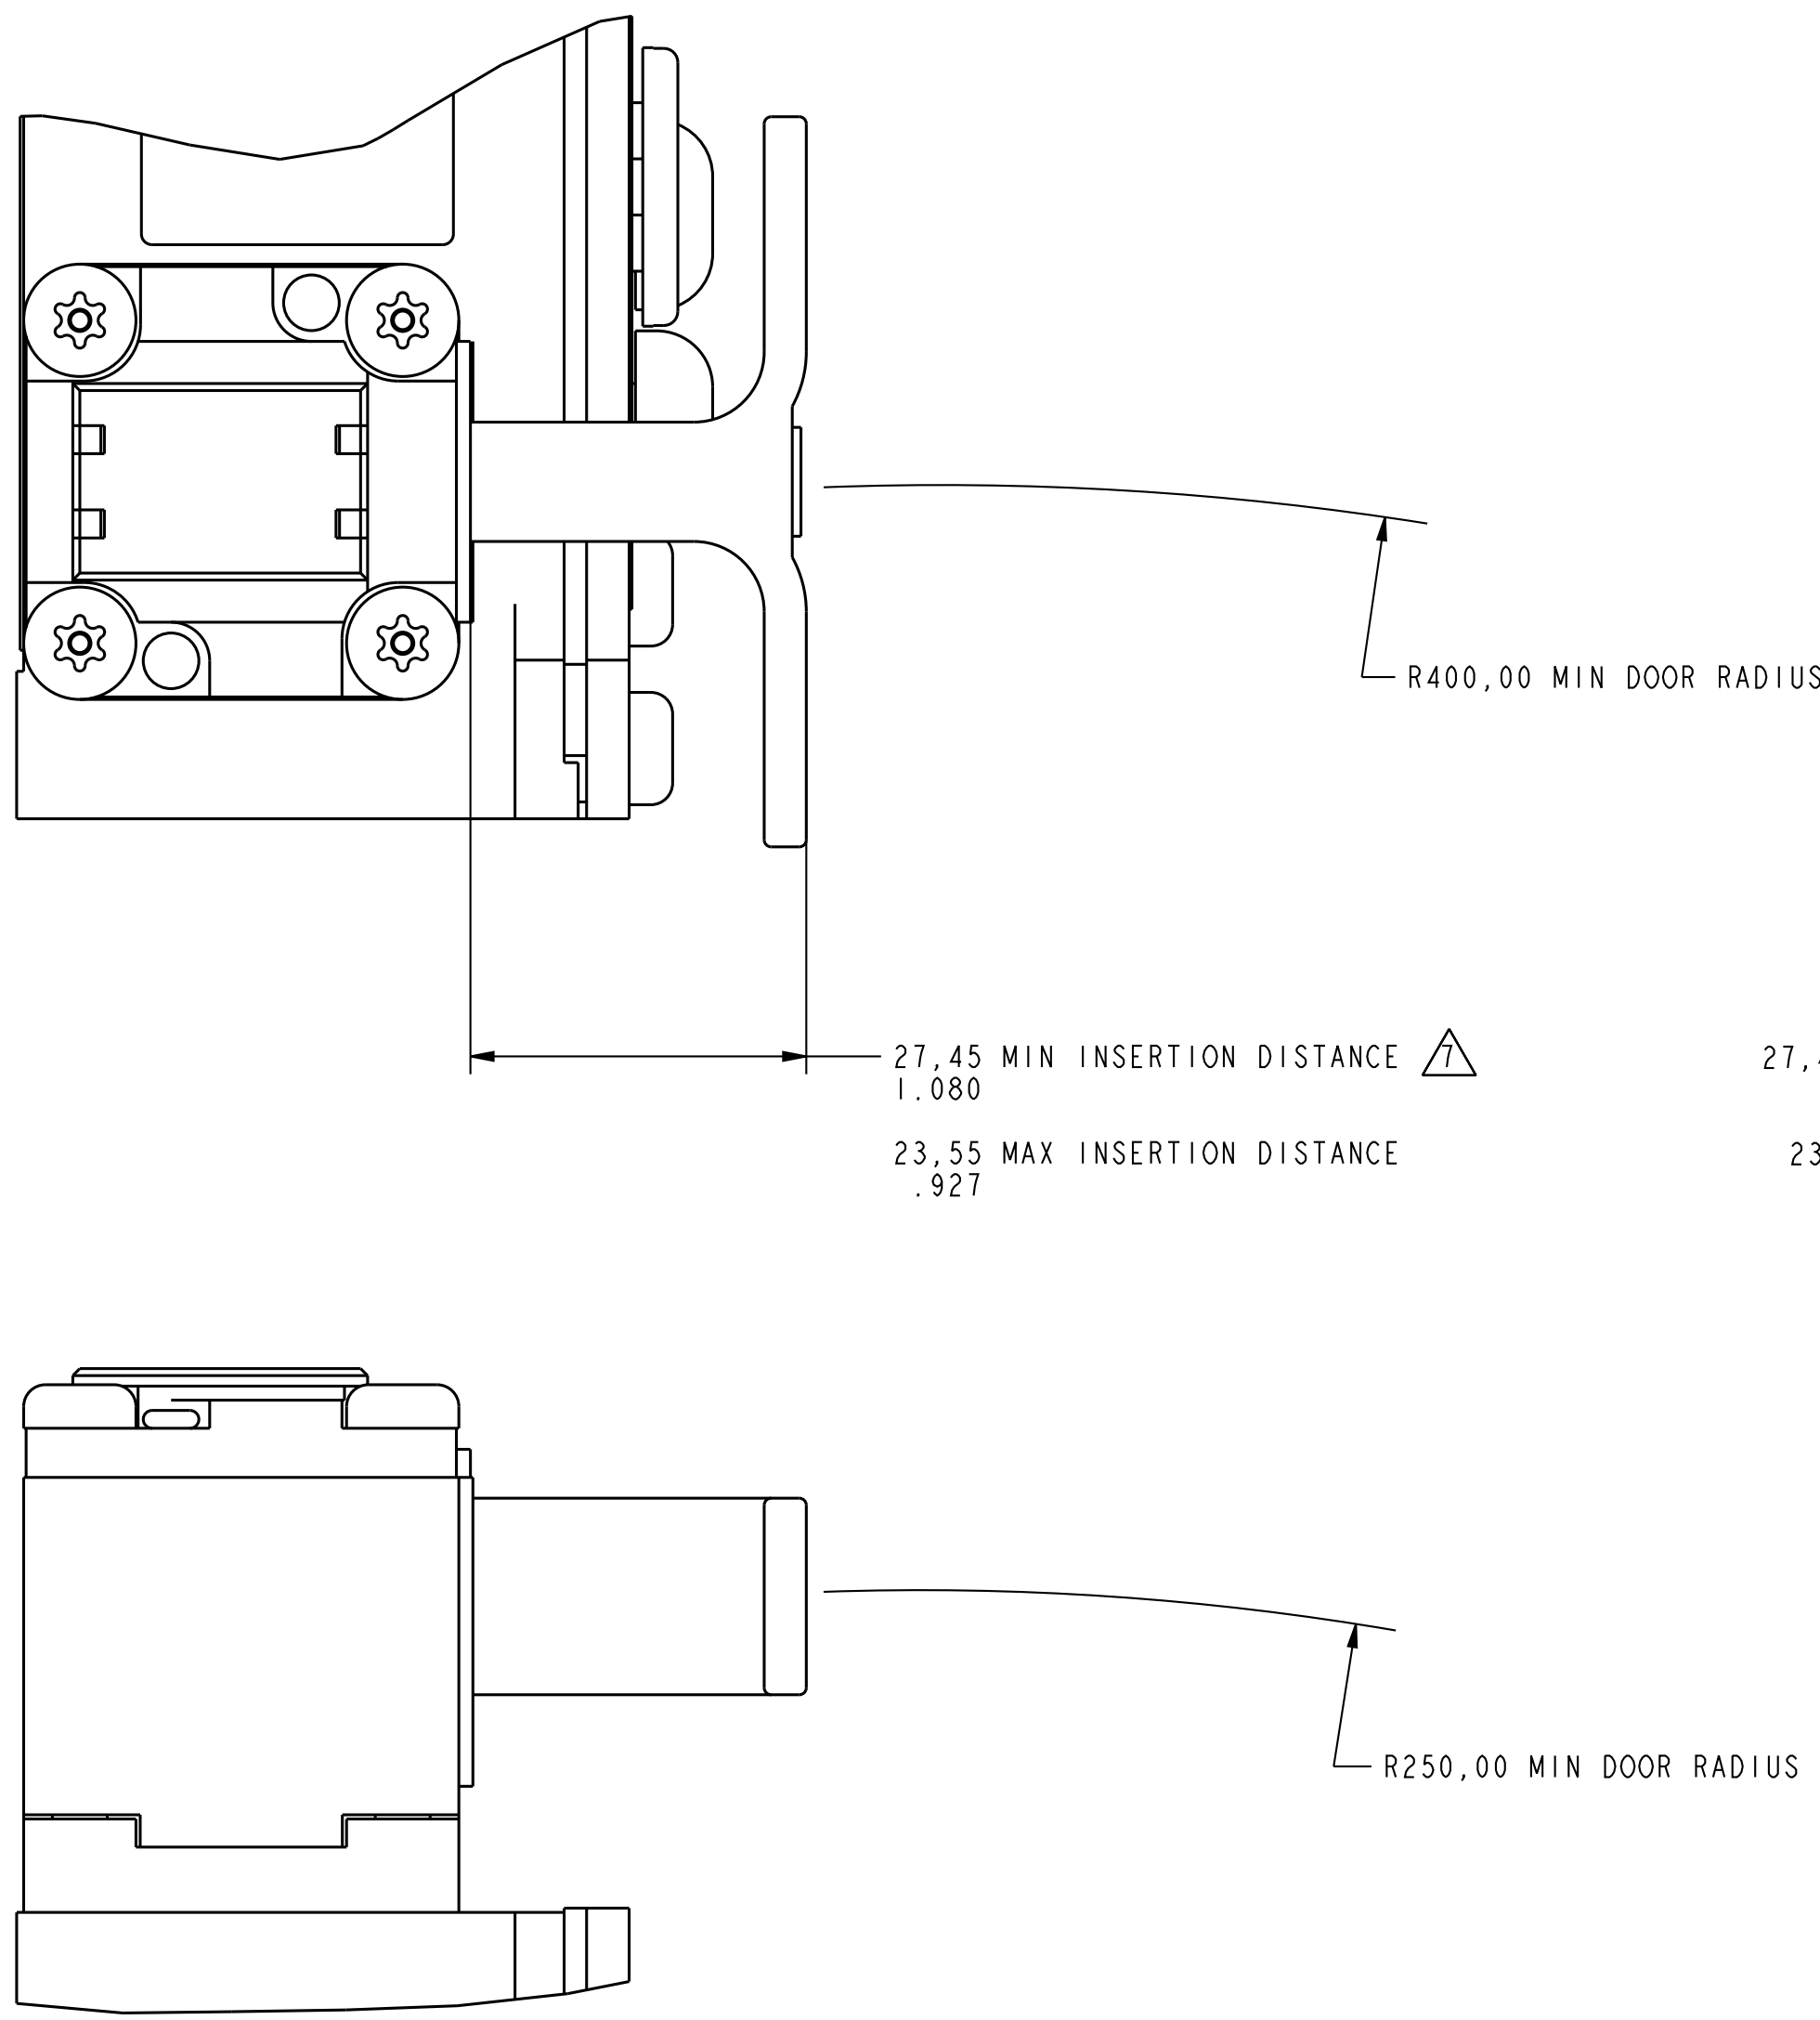

FRONT KEY ENTRY

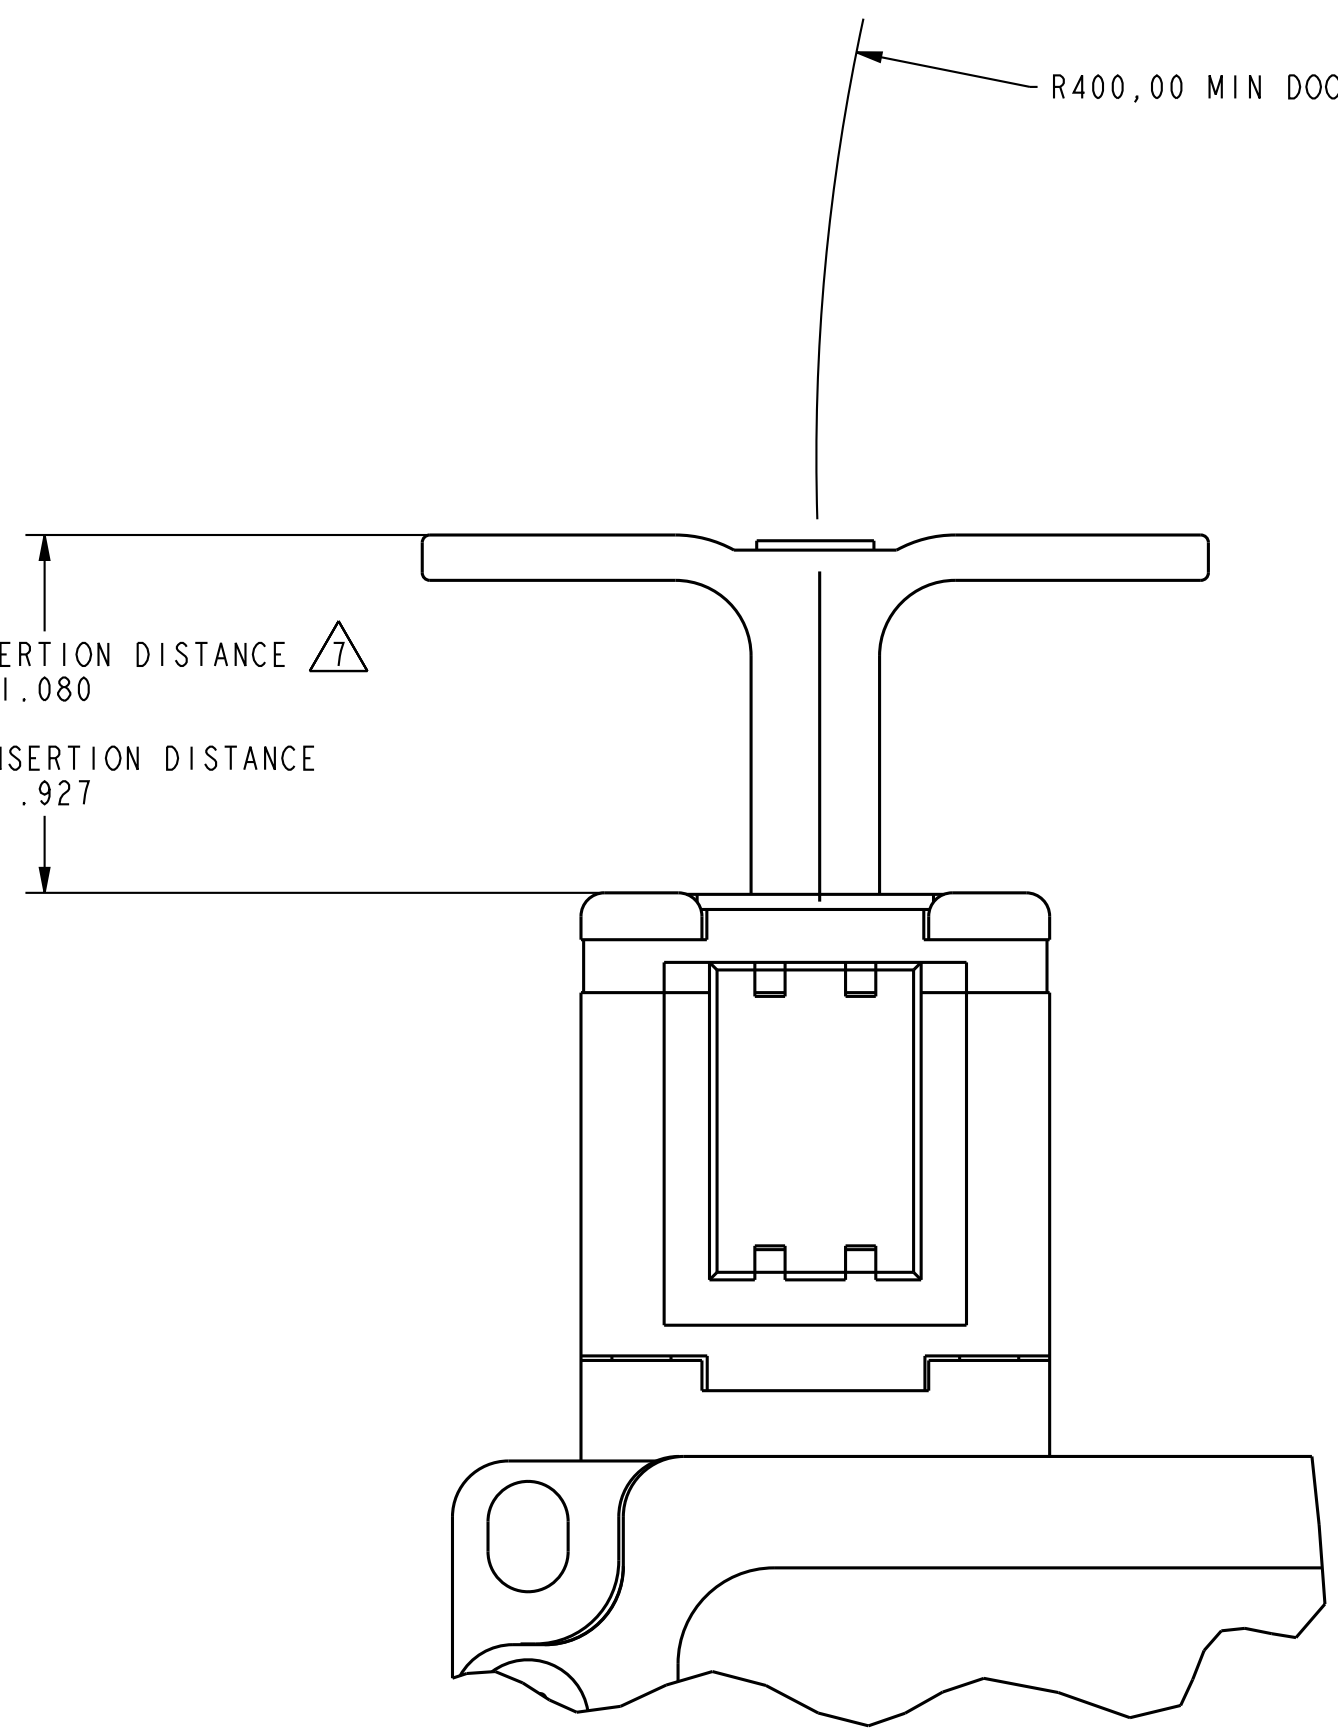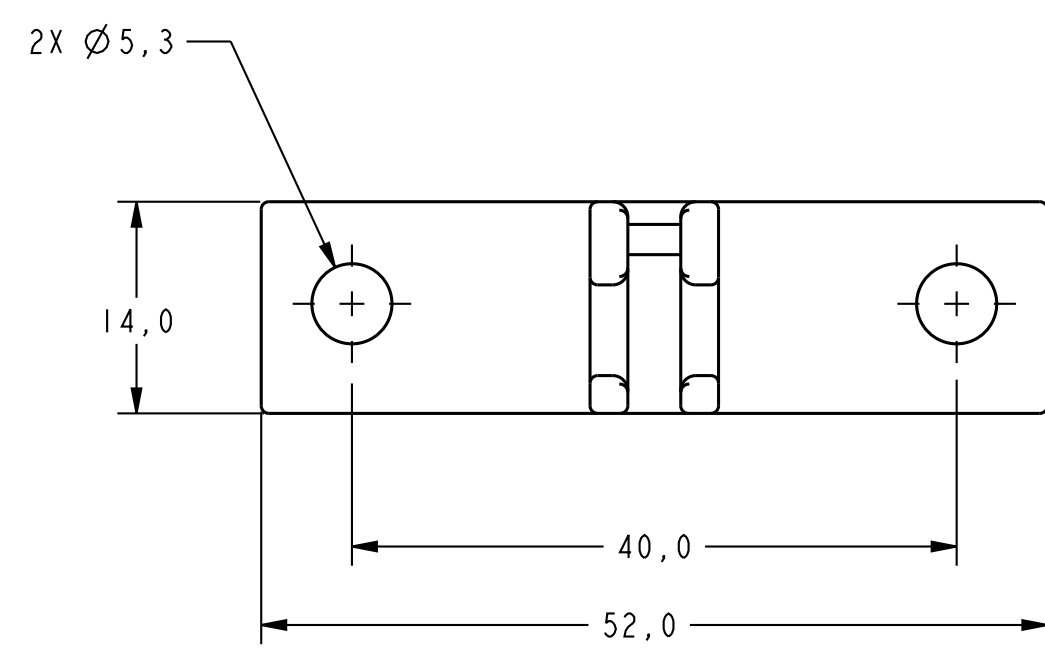

TOP KEY ENTRY

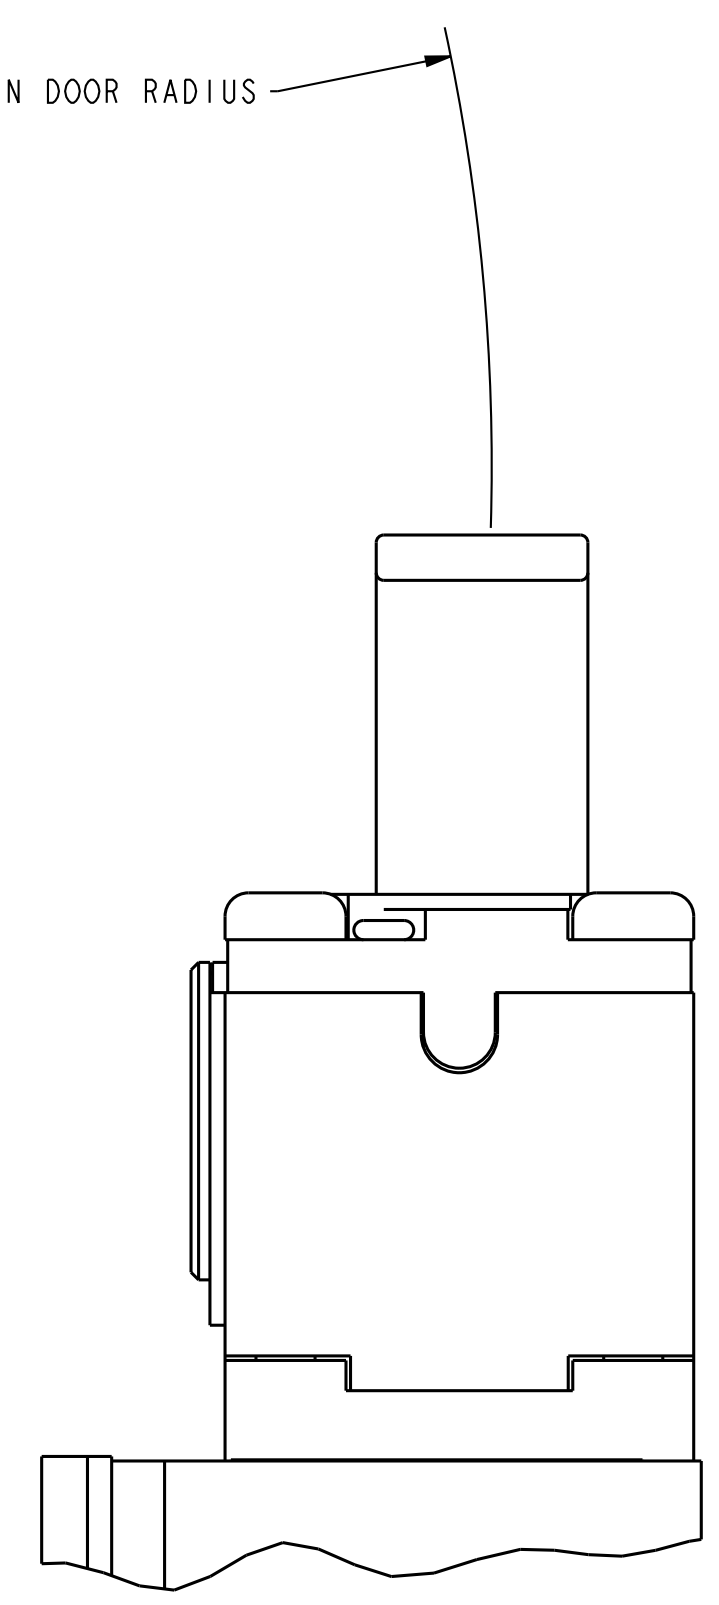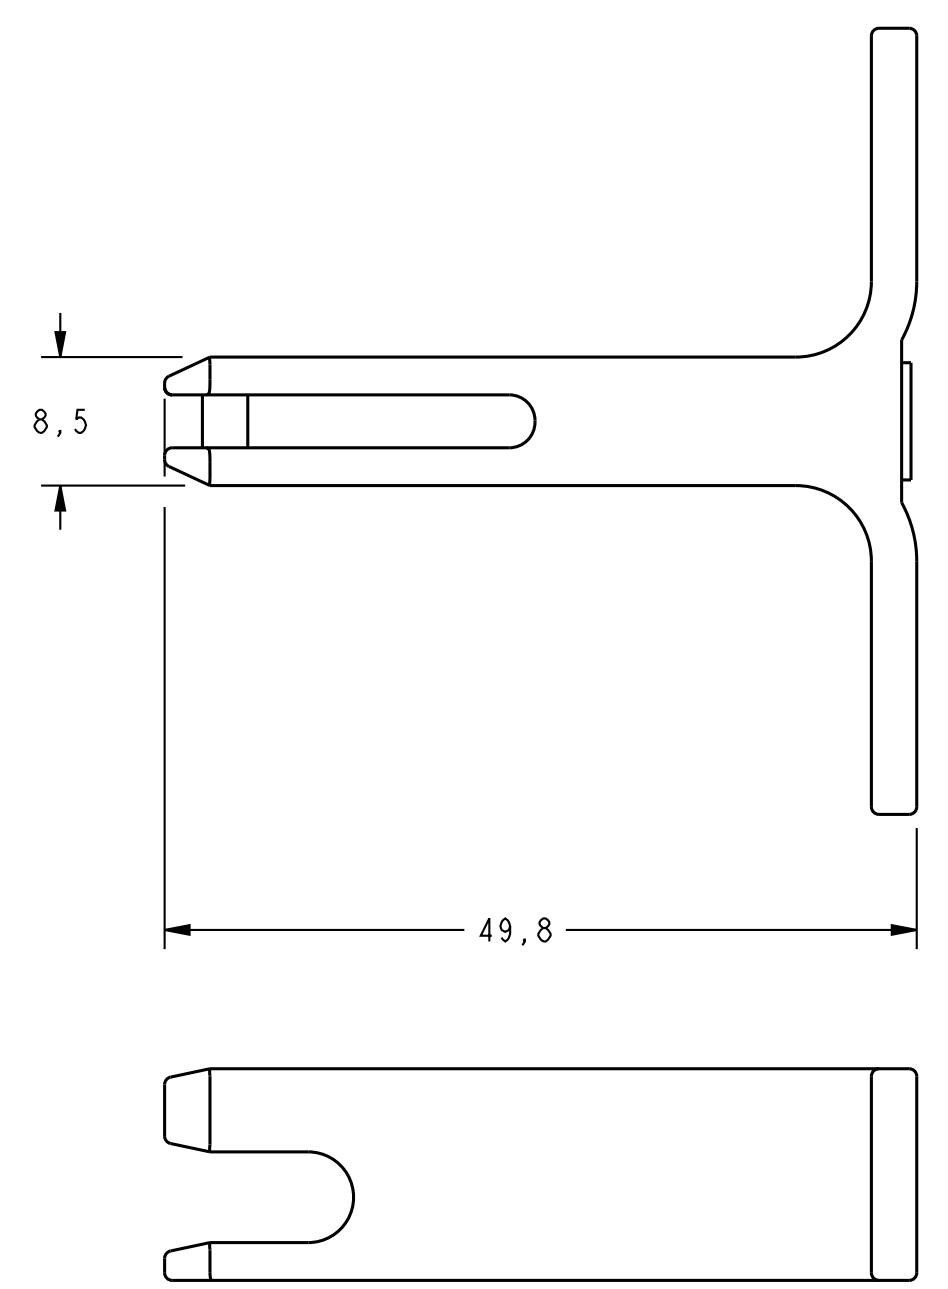


PTC/CAD 3D	DRAWN	MAM	LOC 198	CHECK	CMH	12MAY99	CHECK	PRS	04FEB09	CHECK	CMH	10NOV11	RELEASE NO. PR-23758	PAGE 7 OF 16	ISSUE 5254	DRAWING NUMBER	REPLACES	-
REVISIONS																		
M	0447583																	
SSE	04FEB09																	
P	0065737																	
TRG	31MAY10																	
R	0083578																	
MOD	10NOV11																	

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.																		
FED. MFG. CODE 91929																		
MICRO SWITCH a Honeywell Division																		
CATALOG LISTING																		
SWITCH - DOOR INTERLOCK																		
GK SERIES CHART 4																		
DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY																		
WEIGHT 1,5 KG / 3,3 LB																		

THIRD ANGLE PROJECTION			
SCALE 2 : 1			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1			
NO PLACES	2	1/16	2.2
ONE PLACE	1/16	0.0156	0.39
TWO PLACES	1/32	0.0031	0.08
THREE PLACES	1/64	0.0008	0.02
ANGLES			
DESIGN UNITS	☒ SI METRIC	☐ US CUSTOMARY	
WEIGHT 1,5 KG / 3,3 LB			





MAGK SERIES CHART 4

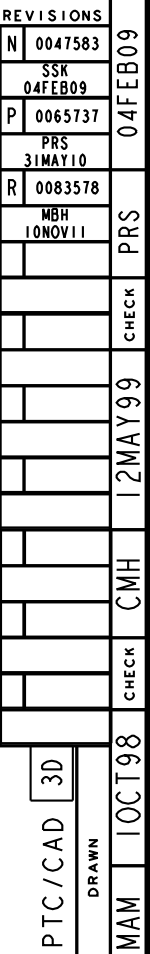

PT


PT

KEY CODE 9

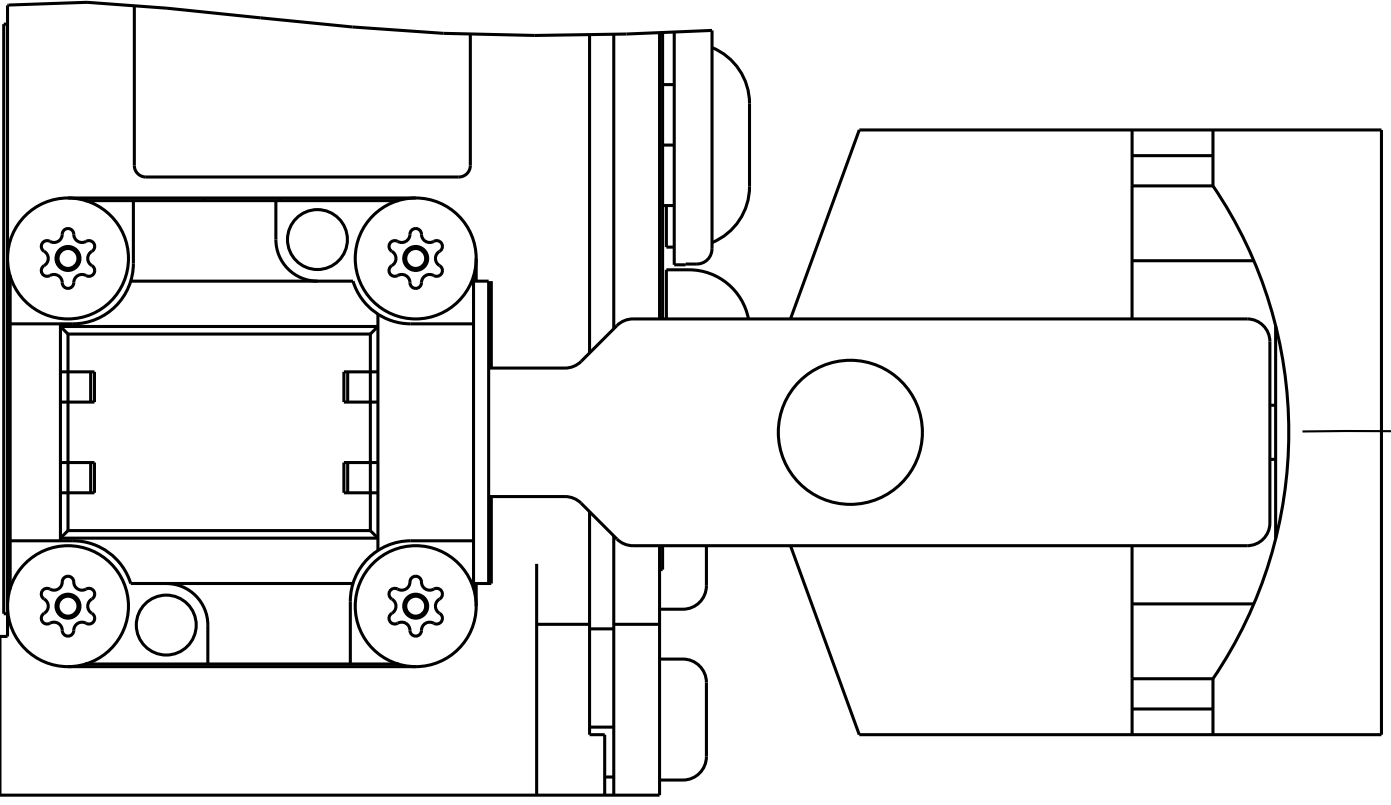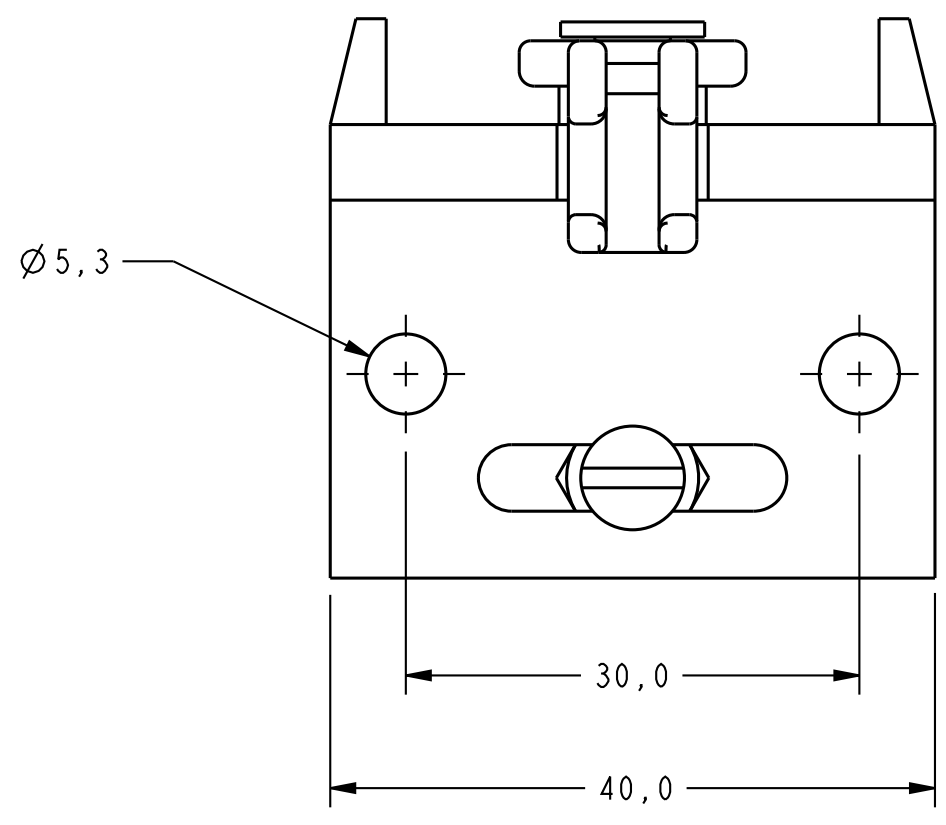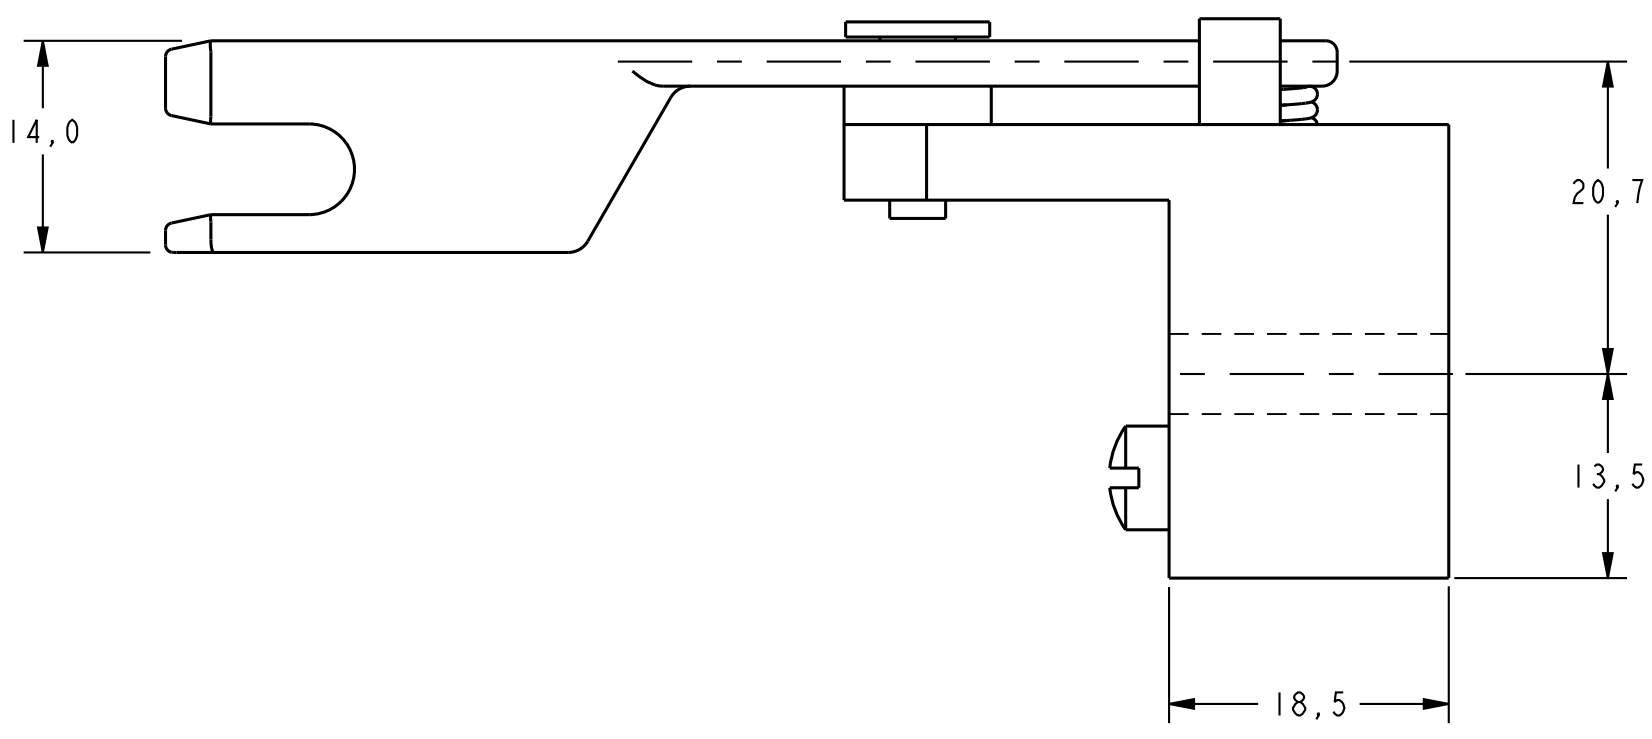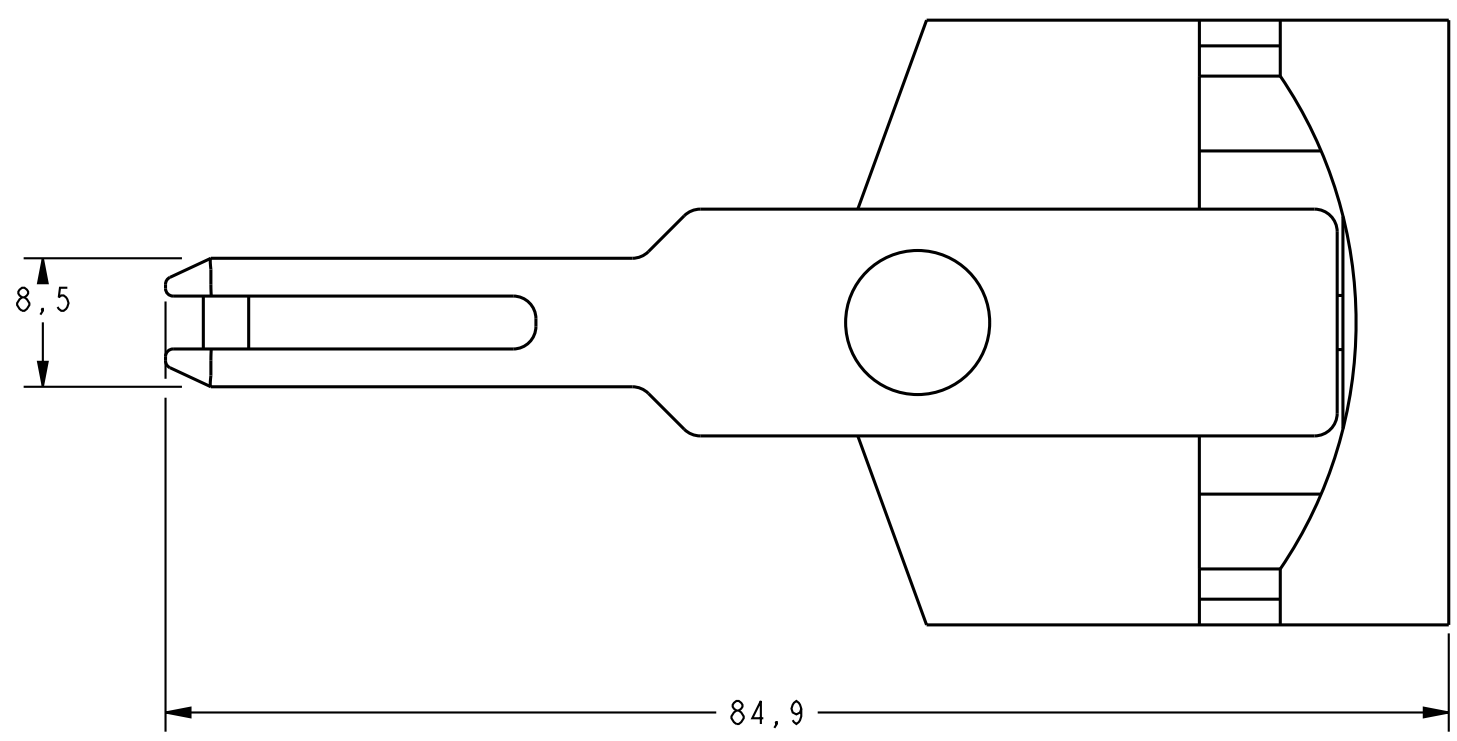


R150,00 MIN DOOR RADIUS

R250,00 MIN DOOR RADIUS

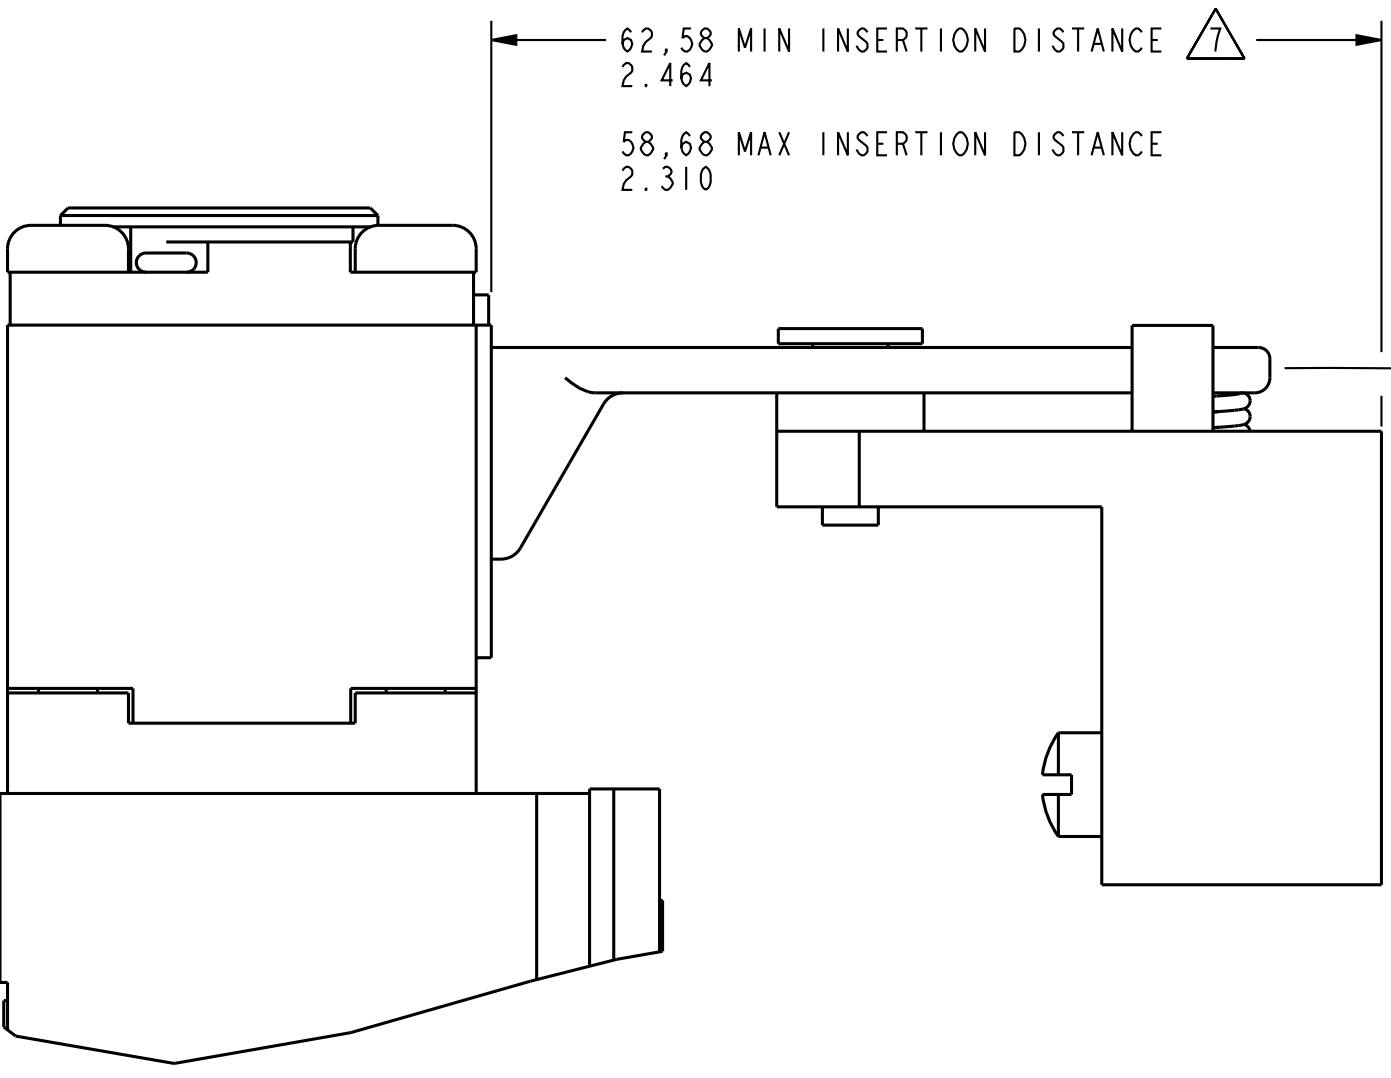


FRONT KEY ENTRY

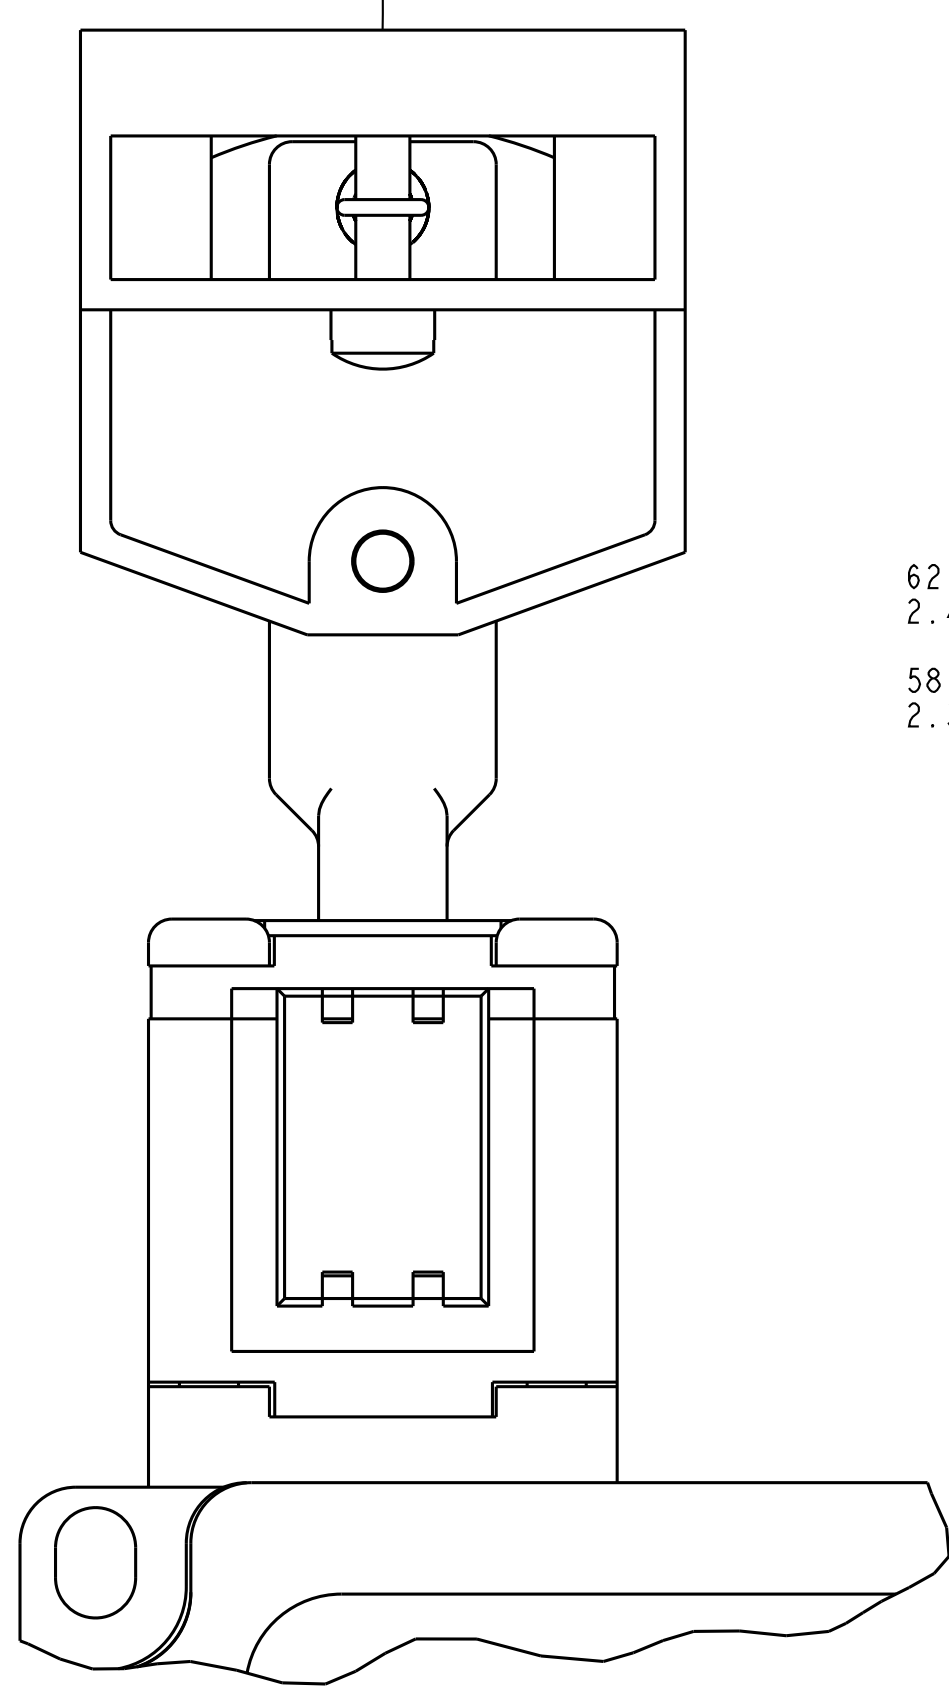


TOP KEY ENTRY

62,58 MIN INSERTION DISTANCE
2.464
58,68 MAX INSERTION DISTANCE
2.310

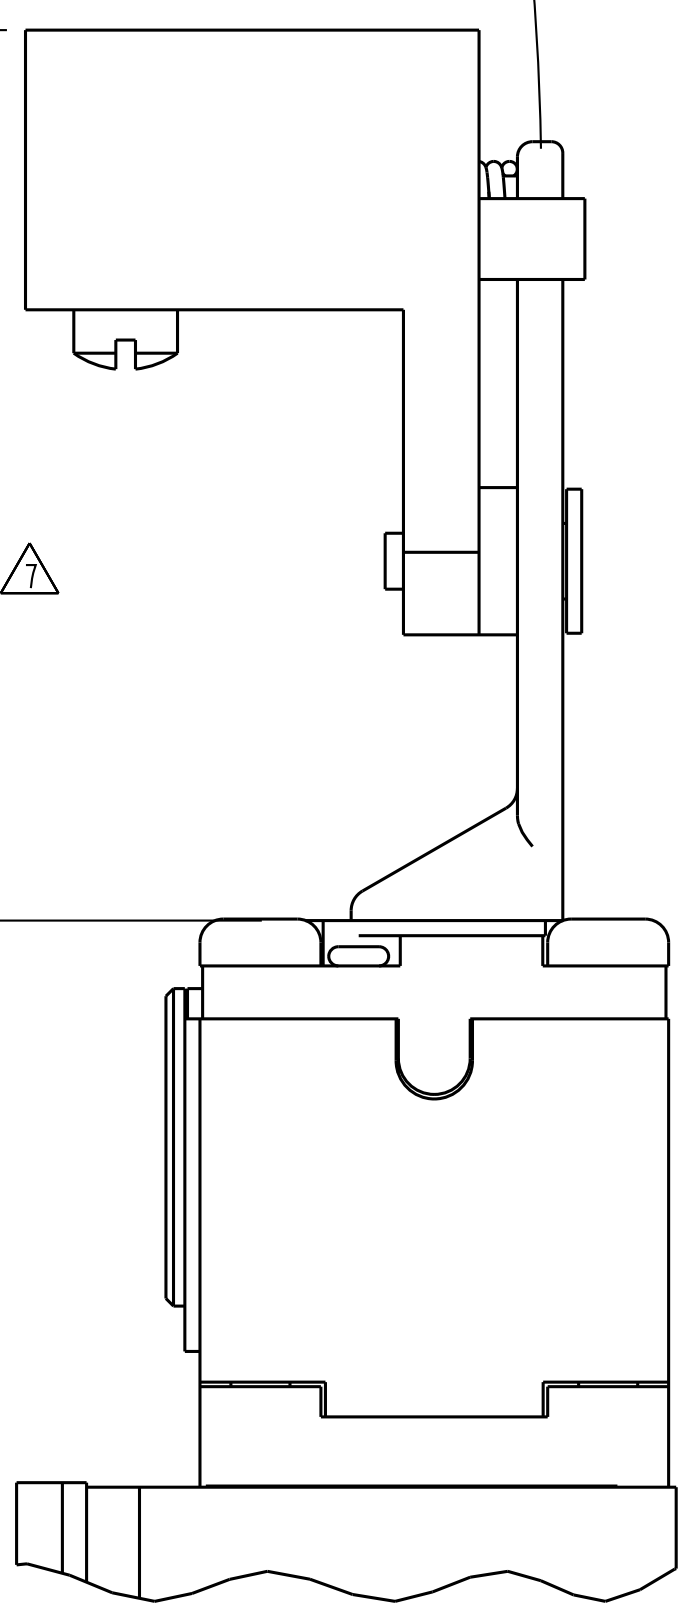

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			
FED. MFG. CODE 91929		CATALOG LISTING	
MICRO SWITCH a Honeywell Division		SWITCH - DOOR INTERLOCK	
GK SERIES CHART 4		DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY	
WEIGHT 1,5 KG / 3,3 LB			

THIRD ANGLE PROJECTION			
SCALE 2 : 1			
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1			
NO PLACES	INCH	TOL.	MM
ONE PLACE	1/16	0,04	1,0
TWO PLACES	1/32	0,0156	0,38
THREE PLACES	1/64	0,0078	0,19
ANGLES	1/16	0,0078	0,19

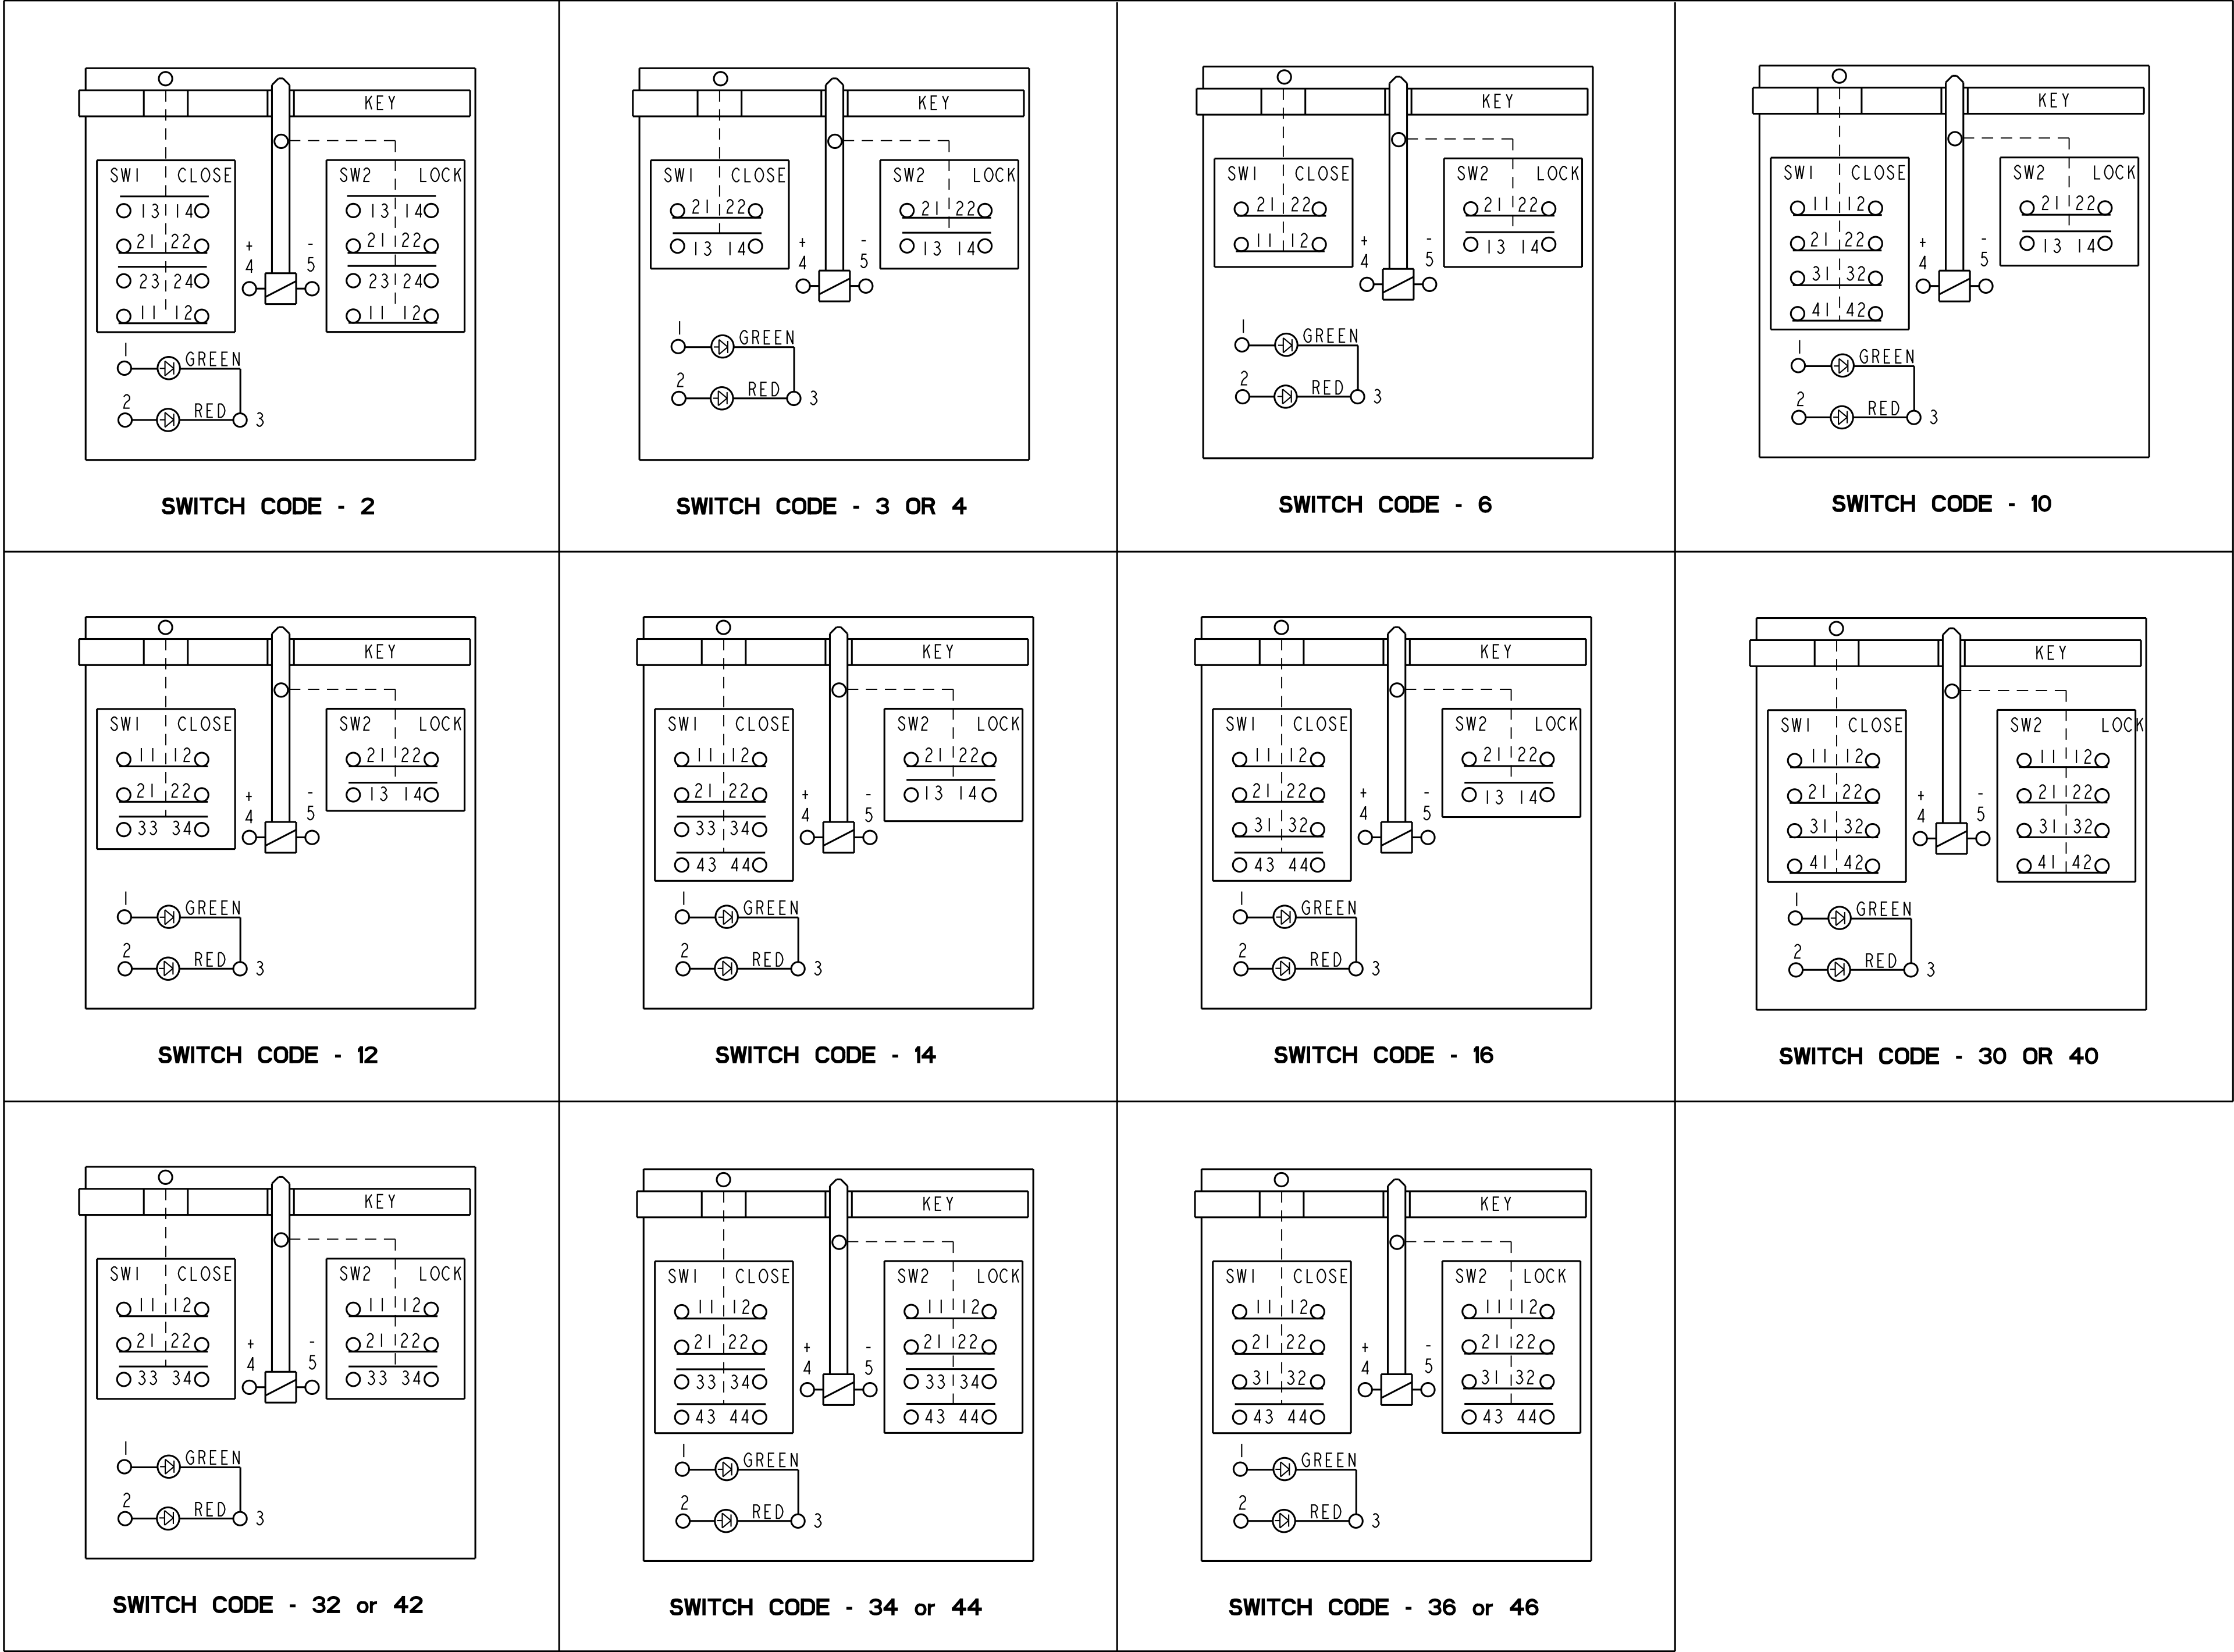

BODY / INDICATOR CODES - L OR R
TYPE / OVER-RIDE CODES - A OR B
DIAGRAMS SHOWN WITH KEY INSERTED AND LOCKED

PTC/CAD 3D
DRAWN
MAM LOC 98
CHECK
CMH 12MAY99
CHECK
PRS
04FEB09
CHECK
CMH
RELEASE NO. PR-23758
PAGE 10 OF 16
REPLACES
-
M GK SERIES CHART 4
5254
ISSUE
NO. 0047583
DATE 08/09
BY 0065737
CHK 31MAY10
R 0083578

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		FED. MFG. CODE 91929		CATALOG LISTING	
MICRO SWITCH a Honeywell Division		SWITCH - DOOR INTERLOCK		GK SERIES CHART 4	
DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY		WEIGHT 1.5 KG / 3.3 LB			

THIRD ANGLE PROJECTION

SCALE NTS

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1

	MM	TOL.	IN.	TOL.
NO PLACES		1/16		0.0156
ONE PLACE	1.2	0.0156	1.2	0.0156
TWO PLACES	1.2	0.0156	1.2	0.0156
THREE PLACES	1.2	0.0156	1.2	0.0156







BODY / INDICATOR CODES - F OR G
 TYPE / OVER-RIDE CODES - S OR T
 DIAGRAMS SHOWN WITH KEY INSERTED AND LOCKED

PTC/CAD 3D
 DRAWING NUMBER
 5254
 ISSUE
 13 OF 16
 RELEASE NO. PR-23758
 REPLACES
 -

REVISIONS
 1 0047583
 2 04FEB99
 3 0065737
 4 0083578
 5 012MAY99
 6 012MAY99
 7 012MAY99
 8 012MAY99
 9 012MAY99
 10 012MAY99
 11 012MAY99
 12 012MAY99
 13 012MAY99
 14 012MAY99
 15 012MAY99
 16 012MAY99
 17 012MAY99
 18 012MAY99
 19 012MAY99
 20 012MAY99
 21 012MAY99
 22 012MAY99
 23 012MAY99
 24 012MAY99
 25 012MAY99
 26 012MAY99
 27 012MAY99
 28 012MAY99
 29 012MAY99
 30 012MAY99
 31 012MAY99
 32 012MAY99
 33 012MAY99
 34 012MAY99
 35 012MAY99
 36 012MAY99
 37 012MAY99
 38 012MAY99
 39 012MAY99
 40 012MAY99
 41 012MAY99
 42 012MAY99
 43 012MAY99
 44 012MAY99
 45 012MAY99
 46 012MAY99
 47 012MAY99
 48 012MAY99
 49 012MAY99
 50 012MAY99
 51 012MAY99
 52 012MAY99
 53 012MAY99
 54 012MAY99
 55 012MAY99
 56 012MAY99
 57 012MAY99
 58 012MAY99
 59 012MAY99
 60 012MAY99
 61 012MAY99
 62 012MAY99
 63 012MAY99
 64 012MAY99
 65 012MAY99
 66 012MAY99
 67 012MAY99
 68 012MAY99
 69 012MAY99
 70 012MAY99
 71 012MAY99
 72 012MAY99
 73 012MAY99
 74 012MAY99
 75 012MAY99
 76 012MAY99
 77 012MAY99
 78 012MAY99
 79 012MAY99
 80 012MAY99
 81 012MAY99
 82 012MAY99
 83 012MAY99
 84 012MAY99
 85 012MAY99
 86 012MAY99
 87 012MAY99
 88 012MAY99
 89 012MAY99
 90 012MAY99
 91 012MAY99
 92 012MAY99
 93 012MAY99
 94 012MAY99
 95 012MAY99
 96 012MAY99
 97 012MAY99
 98 012MAY99
 99 012MAY99
 100 012MAY99

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

CATALOG LISTING

DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY

WEIGHT 1.5 KG / 3.3 LB

THIRD ANGLE PROJECTION

SCALE NTS

DO NOT SCALE PRINT

TOLERANCES


APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1

	NO PLACES	ONE PLACE	TWO PLACES	THREE PLACES	ANGLES
SI METRIC	±.04	±.04	±.04	±.04	±.04
US CUSTOMARY	±.0005	±.0005	±.0005	±.0005	±.0005



SWITCH - DOOR INTERLOCK

GK SERIES CHART 4

MODIFICATION CODE: F05

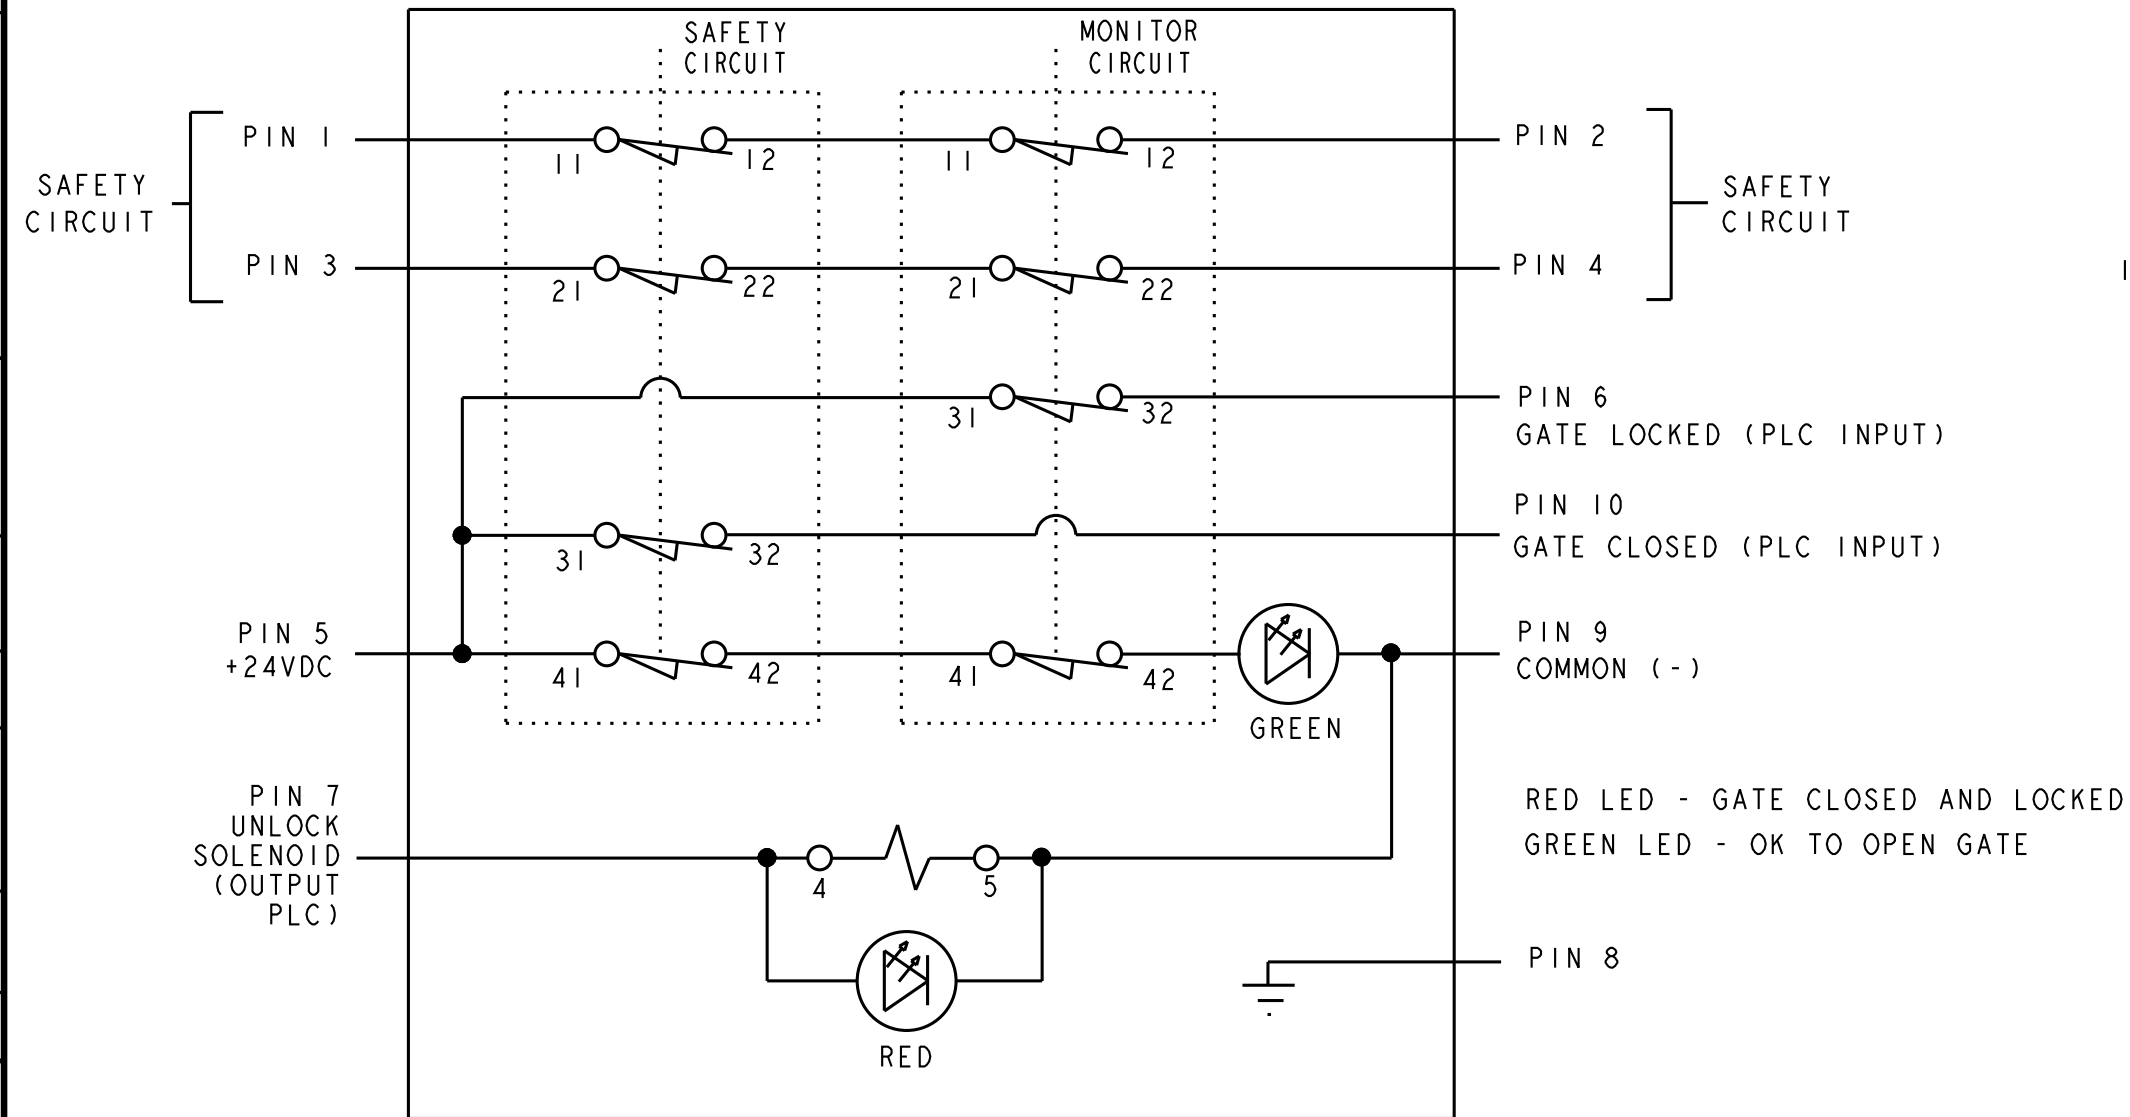

SWITCH DIAGRAM STATE
IS CLOSED AND LOCKED

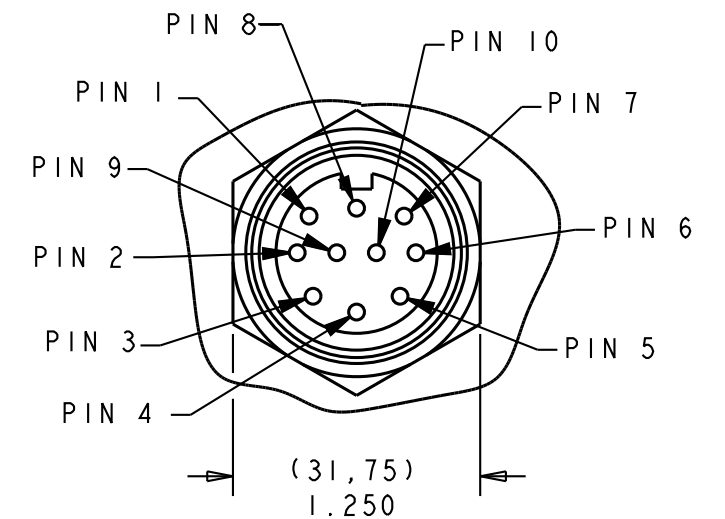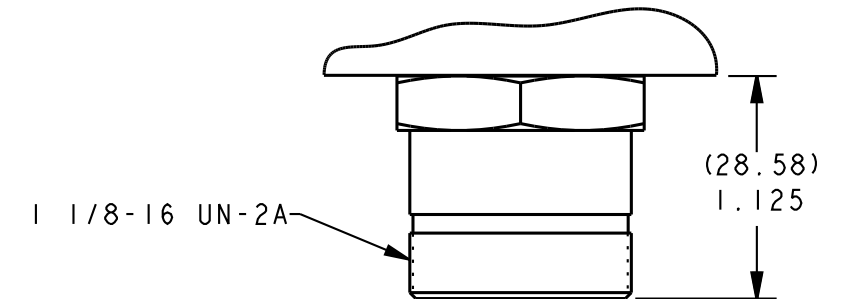


300V 7A
BRAD-HARRISON PART NO. 3R1006A21F010
OR EQUIVALENT


THIRD ANGLE PROJECTION			
SCALE		NTS	
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE :			
DIM. mm TOL mm / in		DIM. mm TOL mm / in	
NO PLACES ONE PLACE TWO PLACES THREE PLACES ANGLES		X X.X X.XX X.XXX I / 0.0 0.4 / 0.6 0.15 / 0.006	
		X X.X X.XX X.XXX 0.8 / 0.03 0.38 / 0.015 0.13 / 0.005	
SI METRIC		US CUSTOMARY	
DESIGN UNITS		☒	
WEIGHT		2,3 kg / 5 LB MAX	

[illegible]



PTC/CAD	3D
DRAWN	
GRT	18JAN00





PTC/CAD	3D
DRAWN	
GRT	18JAN00



PTC/CAD	3D
DRAWN	
GRT	18JAN00



PTC/CAD	3D
DRAWN	
GRT	18JAN00



PTC/CAD	DRAWN	18
	GRT	

PTC/CAD	3D
DRAWN	
GRT	18JAN00

PTC/CAD	DRAWN	18
	GRT	

PTC/CAD	3D
DRAWN	
GRT	18JAN00

PTC/CAD	DRAWN	18
	GRT	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell:

[GKFE16LXA2](#) [GKFE16LXA6](#) [GKLA2K1A2-F04](#) [GKLA2K1A2-F04-C](#) [GKLA2K2A2-F04-C](#) [GKLA3J1A2-F03-C](#)
[GKLA40F1C2-F05-C](#) [GKRA2K1A2-F03](#) [GKRA2K1A2-F04-C](#) [GKRA3K1A2-F03-C](#) [GKFE3P7T4](#) [GKGE3LXB4](#)
[GKLE44P7S4](#) [GKLG44LXS2](#) [GKLG46L7S2](#) [GKLA14L9A2-FW](#) [GKRG46MXA2-F21](#) [GKLE44L6S4](#) [GKLG6L6A2](#)
[GKRA14L6A2-FW](#) [GKLE46L9A4](#) [GKLG16L6A2](#) [GKLE46L7A2](#) [GKLE44L7T4](#) [GKLE36PXA2-F22](#) [GKRA15M6A4-FW](#)
[GKLE44L6A2](#) [GKLE44PXT2](#) [GKFG14LXA2](#) [GKLE44L9A4](#) [GKLG16L7A2](#) [GKLE46L9A2](#) [GKLE44LXS4](#)
[GKLE44P7T4](#) [GKRA14P9A2-FW](#) [GKLG16L6S2](#) [GKLE46L7S4](#) [GKLA15L6A2-FW](#) [GKLA15M6A2-FW](#) [GKLG16L7S2](#)
[GKRA15P9A2-FW](#) [GKLE44LXA2](#) [GKLG46L7A2](#) [GKLA15M9A2-FW](#) [GKLF46PXB2](#) [GKRG16L6A2](#) [GKLE44P6A4](#)
[GKLA14L6A2-FW](#) [GKLG46PXA2-F20](#) [GKLA15L9A2-FW](#) [GKLA15P6A2-FW](#) [GKLA46L6A4](#) [GKLE46P7A4](#)
[GKLG44PXA2](#) [GKLA14M9A2-FW](#) [GKRA15M6A2-FW](#) [GKLA2PXA2-F04](#) [GKRA15L6A2-FW](#) [GKLE44L7A2](#)
[GKLE44LXS2](#) [GKLE46LXA2](#) [GKLA15P6A4-FW](#) [GKLG46P6A2](#) [GKLF44LXS2](#) [GKLD44L6A2](#) [GKLE44L9A2](#)