
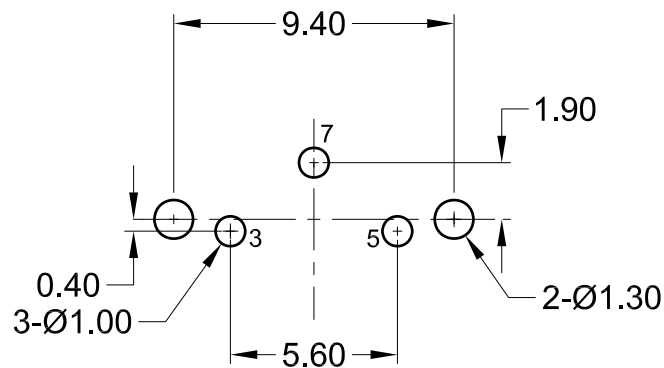


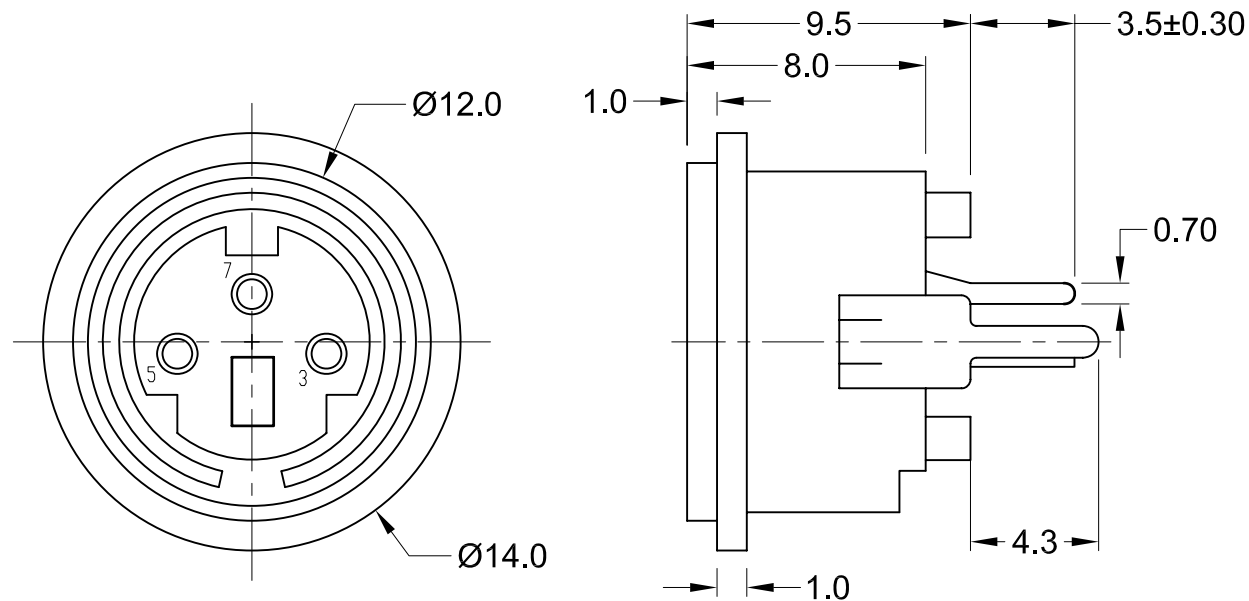

Recommended PCB Layout
(Bottom View)

Material And Finish

Insert- PBT Thermoplastic, Black Color
UL94V-0 Rated

Contact Material- Phosphor Bronze

Contact Plating- Silver Plated

Mechanical Characteristics

Insertion Force- 0.5kg-4.5kg

Withdrawal Force- 0.4kg-3.5kg

Durability- 5000 Cycles Min.

Electrical Characteristics

Contact Current Rating-
2 Amp Max. @ 12V DC

Insulation Resistance-
100 Megohms Min. at 250V DC

Contact Resistance-
Before Durability Testing-
Plug to Shield- 50 milliohms max.
Plug to Terminals- 30 milliohms max.
After Durability Testing-
Plug to Shield- 100 milliohms max.
Plug to Terminals- 60 milliohms max.

Dielectric Withstanding Voltage-
250VAC for 1 Minute

Operating Temperature-
-25°C to +80°C

RoHS COMPLIANT

EU Directive 2002/95/EC




Tolerances	
X.X ± 0.25	
X.XX ± 0.15	
Unless Stated	
Otherwise	

C US
LR78160

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	4/18/05	New Drawing	H. MA	C. Furumasu	H. MA	4/18/05
A2	8/6/09	Remove non use Dim	H. MA	N/A		

KMDVLX-3S-N



UNITS
mm

Mini-Din 3 position, Vertical Mount, RoHS Compliant

thru hole, Snap and Lock Compatible,



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kycon:](#)

[KMDVLX-3S-N](#)