


BGA Heat Sink - High Performance Ultra Low Profile

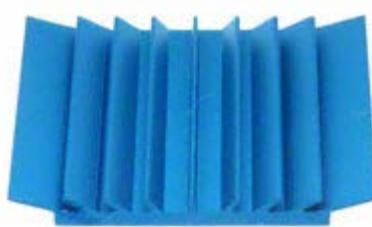

ATS Part#: **ATS-60000-C1-R0**
Description: 25.20 x 25.20 x 4.00 mm BGA Heat Sink - High Performance Ultra Low Profile
Heat Sink Type: Ultra Low profile
Heat Sink Attachment: Thermal Tape
Equivalent Part Number: ATS-60000-C2-R0

*Image above is for illustration purpose only.

Features & Benefits

- blueICE™ heat sinks feature an ultra low profile for tough-to-cool applications
- Designed for high performance in low air velocities
- Ideal for telecommunications applications where space is limited
- Comes preassembled with high performance thermal interface material

Thermal Performance

AIR VELOCITY		@200 LFM 1.0 M/S	@300 LFM 1.5 M/S	@400 LFM 2.0 M/S	@500 LFM 2.5 M/S	@600 LFM 3.0 M/S	@700 LFM 3.5 M/S	@800 LFM 4.0 M/S
THERMAL RESISTANCE	Unducted Flow	14.8 °C/W	11.6 °C/W	9.6 °C/W	8 °C/W	6.9 °C/W	5.9 °C/W	5.3 °C/W
	Ducted Flow	7.8	N/A	N/A	N/A	N/A	N/A	N/A

Product Detail

Schematic Image	Dimension A	Dimension B	Dimension C	Dimension D	TIM	Finish
	25.20 mm	25.20 mm	4.00 mm	34.8 mm	T412	BLUE-ANODIZED
Notes:						
<ul style="list-style-type: none">Dimension A and B refer to component size.Dimension C is the heat sink height from the bottom of the base to the top of the fin field.ATS-60000-C2-R0 is the exact heat sink assembly with an equivalent thermal interface material (Saint-Gobain C675).Thermal performance data are provided for reference only. Actual performance may vary by application.ATS reserves the right to update or change its products without notice to improve the design or performance.ATS certifies that this heat sink assembly is RoHS-6 and REACH compliant.Contact ATS to learn about custom options available.						

*Image above is for illustration purpose only.

For more information, to find a distributor or to place an order, please contact us at 781-769-2800 (North America), sales@qats.com or www.qats.com.

© 2013 Advanced Thermal Solutions, Inc. | 89-27 Access Road | Norwood MA | 02062 | USA