

TC74HC86P QUAD EXCLUSIVE OR GATE

The TC74HC86 is a high speed CMOS QUAD EXCLUSIVE OR GATE fabricated with silicon gate C²MOS technology.


It achieves the high speed operation similar to equivalent LSTTL while maintaining the CMOS low power dissipation.

Input and output buffer are installed, which enables high noise immunity and stable output.

All inputs are equipped with protection circuits against static discharge or transient excess voltage.


FEATURES:

- . High Speed..... $t_{pd}=14ns$ (Typ.) at $V_{CC}=5V$
- . Low Power Dissipation..... $I_{CC}=1\mu A$ (Max.) at $T_a=25^\circ C$
- . High Noise Immunity..... $V_{NIH}=V_{NIL}=28\% V_{CC}$ (Min.)
- . Output Drive Capability.....10 LSTTL Loads
- . Symmetrical Output Impedance... $|I_{OH}|=I_{OL}=4mA$ (Min.)
- . Balanced Propagation Delays... $t_{pLH} \approx t_{pHL}$
- . Wide Operating Voltage Range... $V_{CC(opr)}=2V \sim 6V$
- . Pin and Function Compatible with 74LS86




DIP (5-21F)

LOGIC DIAGRAM (per Gate)



PIN ASSIGNMENT



TC74HC86P

ABSOLUTE MAXIMUM RATINGS


PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage Range	V_{CC}	$-0.5 \sim 7$	V
DC Input Voltage	V_{IN}	$-0.5 \sim V_{CC}+0.5$	V
DC Output Voltage	V_{OUT}	$-0.5 \sim V_{CC}+0.5$	V
Input Diode Current	I_{IK}	± 20	mA
Output Diode Current	I_{OK}	± 20	mA
DC Output Current	I_{OUT}	± 25	mA
DC V_{CC} /Ground Current	I_{CC}	± 50	mA
Power Dissipation	P_D	500*	mW
Storage Temperature	T_{stg}	$-65 \sim 150$	$^{\circ}\text{C}$
Lead Temperature 10sec	T_L	300	$^{\circ}\text{C}$

* 500mW in the range of $T_a = -40^{\circ}\text{C} \sim 65^{\circ}\text{C}$.
and from $T_a = 65^{\circ}\text{C}$ up to 85°C derating factor of $-10\text{mW}/^{\circ}\text{C}$ shall be applied until 300mW.

RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	LIMIT	UNIT
Supply Voltage	V_{CC}	$2 \sim 6$	V
Input Voltage	V_{IN}	$0 \sim V_{CC}$	V
Output Voltage	V_{OUT}	$0 \sim V_{CC}$	V
Operating Temperature	T_{opr}	$-40 \sim 85$	$^{\circ}\text{C}$
Input Rise and Fall Time	t_r, t_f	$0 \sim 500$	ns

INPUT and OUTPUT EQUIVALENT CIRCUIT



DC ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION		Ta=25°C				Ta=-40~85°C		UNIT
				VCC	MIN.	TYP.	MAX.	MIN.	MAX.	
High-Level Input Voltage	VIH			2.0	1.5	-	-	1.5	-	V
				4.5	3.15	-	-	3.15	-	
				6.0	4.2	-	-	4.2	-	
Low-Level Input Voltage	VIL			2.0	-	-	0.5	-	0.5	V
				4.5	-	-	1.35	-	1.35	
				6.0	-	-	1.8	-	1.8	
High-Level Output Voltage	VOH	VIN=	I _{OH} =-20μA	2.0	1.9	2.0	-	1.9	-	V
				4.5	4.4	4.5	-	4.4	-	
		VIH or VIL	I _{OH} =-4mA	6.0	5.9	6.0	-	5.9	-	
				4.5	4.18	4.31	-	4.13	-	
			I _{OH} =-5.2mA	6.0	5.68	5.80	-	5.63	-	

TC74HC86P

DC ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION		Ta=25°C			Ta=-40~85°C		UNIT	
				V _{CC}	MIN.	TYP.	MAX.	MIN.		MAX.
Low-Level Output Voltage	V _{OL}	V _{IN} =	I _{OL} =20μA	2.0	-	0.0	0.1	-	0.1	V
				4.5	-	0.0	0.1	-	0.1	
				6.0	-	0.0	0.1	-	0.1	
		V _{IH} or V _{IL}	I _{OL} =4mA	4.5	-	0.17	0.32	-	0.37	
			I _{OL} =5.2mA	6.0	-	0.18	0.32	-	0.37	
Input Leakage Current	I _{IN}	V _{IN} =V _{CC} or GND		6.0	-	-	±0.1	-	±1.0	μA
Quiescent Supply Current	I _{CC}	V _{IN} =V _{CC} or GND		6.0	-	-	1.0	-	10.0	

AC ELECTRICAL CHARACTERISTICS (C_L=50pF, Input t_r=t_f=6ns)

PARAMETER	SYMBOL	TEST CONDITION	V _{CC}	Ta=25°C			Ta=-40~85°C		UNIT
				MIN.	TYP.	MAX.	MIN.	MAX.	
Output Transition Time	t _{TLH} t _{THL}		2.0	-	30	75	-	75	ns
			4.5	-	8	15	-	18	
			6.0	-	7	13	-	16	
Propagation Delay Time	t _{pLH} t _{pHL}		2.0	-	60	135	-	165	ns
			4.5	-	18	27	-	33	
			6.0	-	15	23	-	28	
Input Capacitance	C _{IN}			-	5	10	-	10	pF
Power Dissipation Capacitance	C _{PD} (1)			-	34	-	-	-	


Note (1) C_{PD} is defined as the value of internal equivalent capacitance of IC which is calculated from the operating current consumption without load (refer to Test circuit).

Average operating current can be obtained by the equation hereunder.


$$I_{CC(opr)} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}/4 \text{ (per Gate)}$$

TC74HC86P


SWITCHING CHARACTERISTICS TEST CIRCUIT

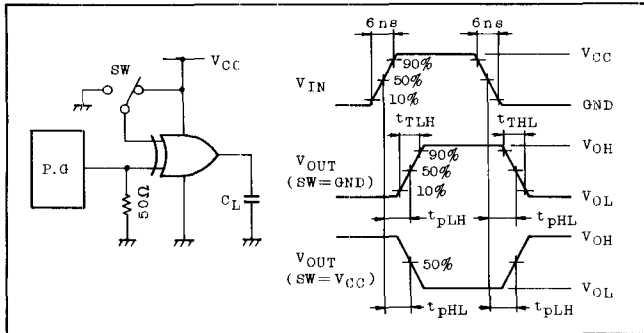


$I_{CC(opr)}$ TEST CIRCUIT




I_{OH} CHARACTERISTICS

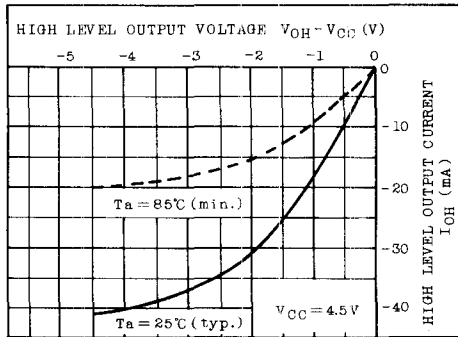


I_{OL} CHARACTERISTICS

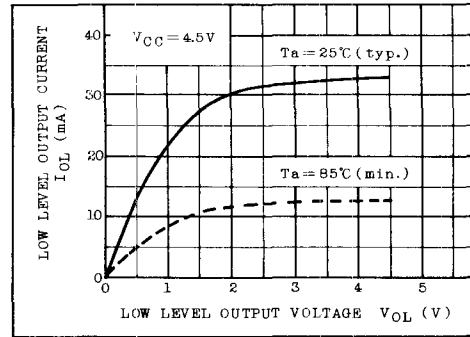

$t_{TLH}, t_{THL} - V_{CC}$ CHARACTERISTICS (TYP.)

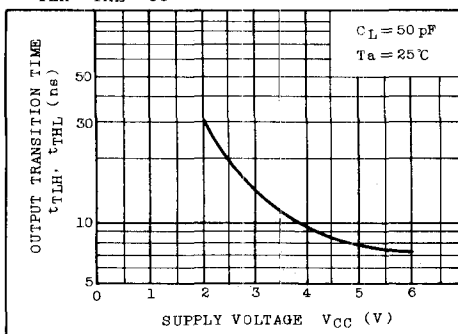


$t_{PLH}, t_{PHL} - V_{CC}$ CHARACTERISTICS (TYP.)

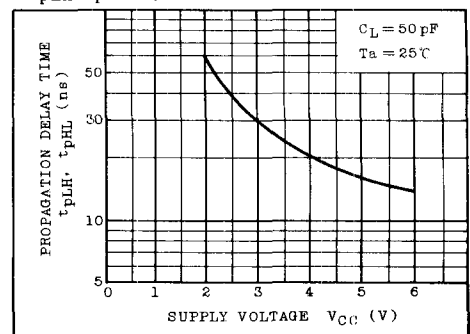

TC74HC86P

$t_{TLH}, t_{THL}-C_L$ CHARACTERISTICS (TYP.)

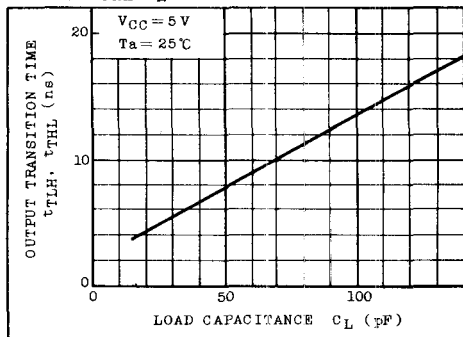

$t_{PLH}, t_{PHL}-C_L$ CHARACTERISTICS (TYP.)

