

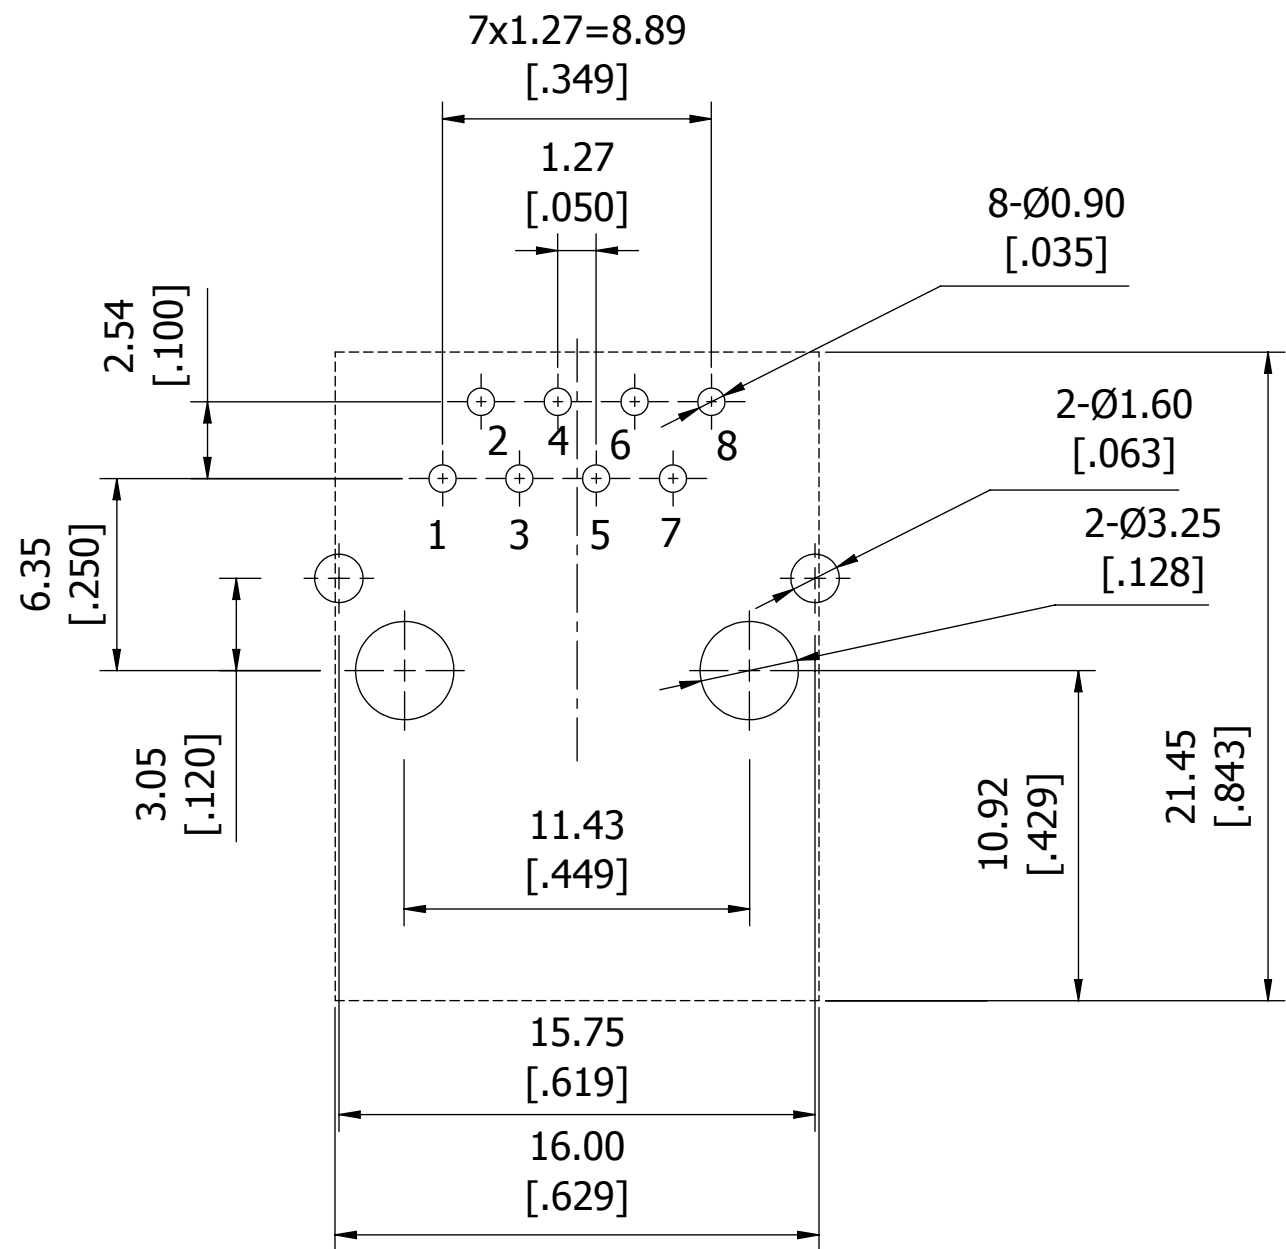
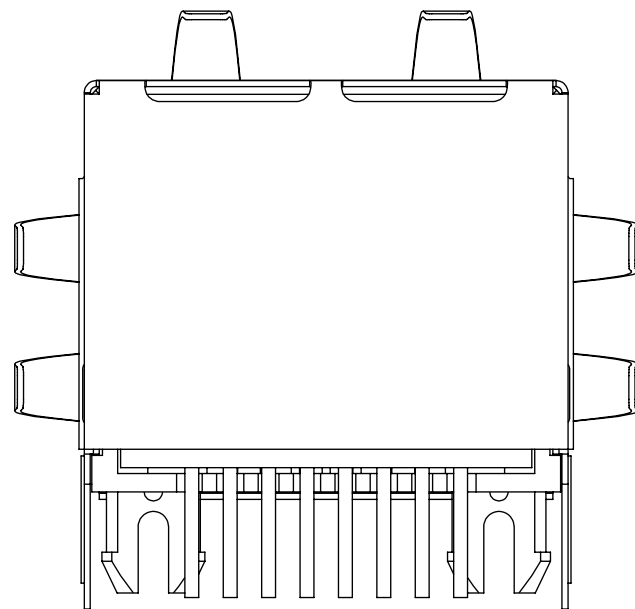
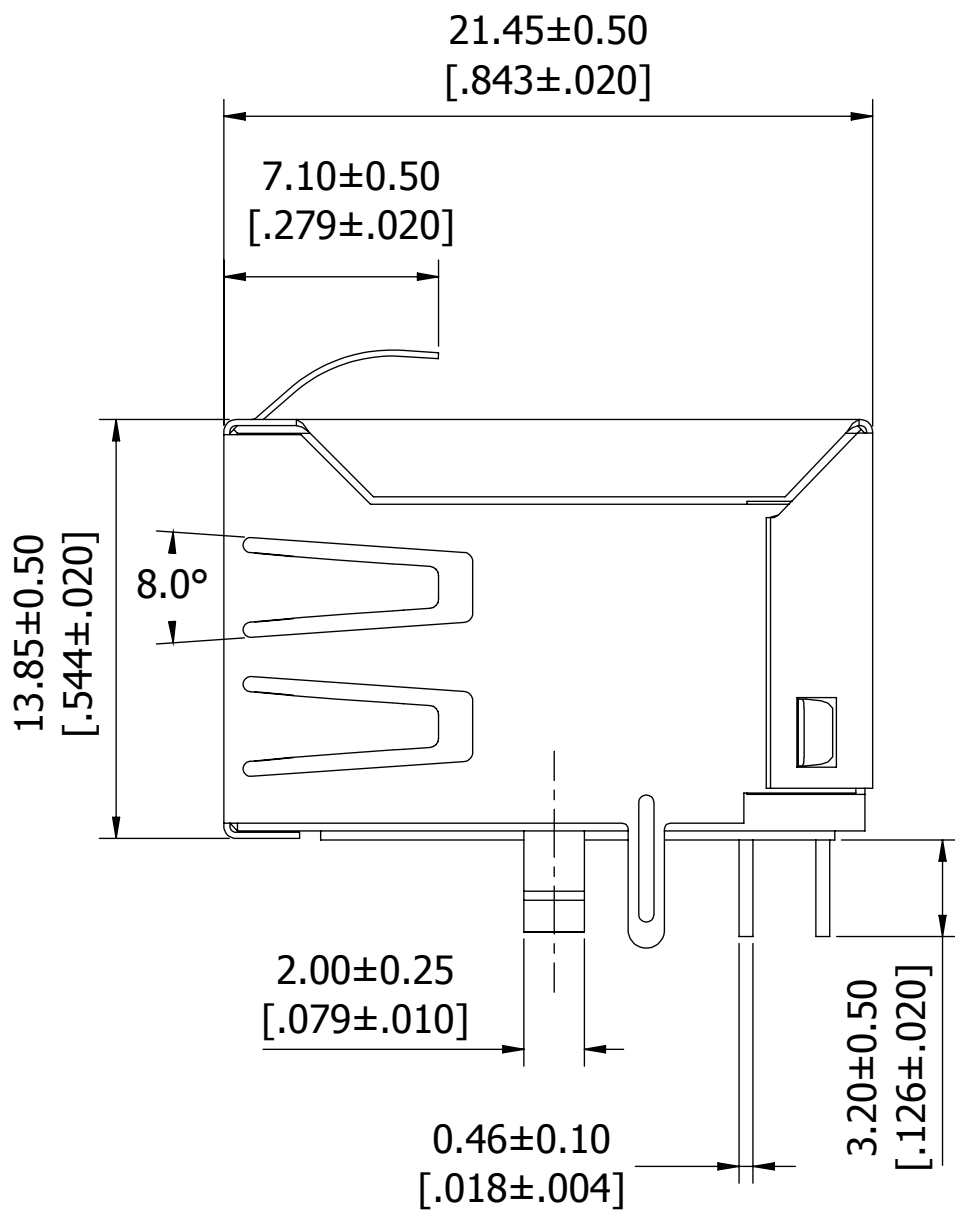
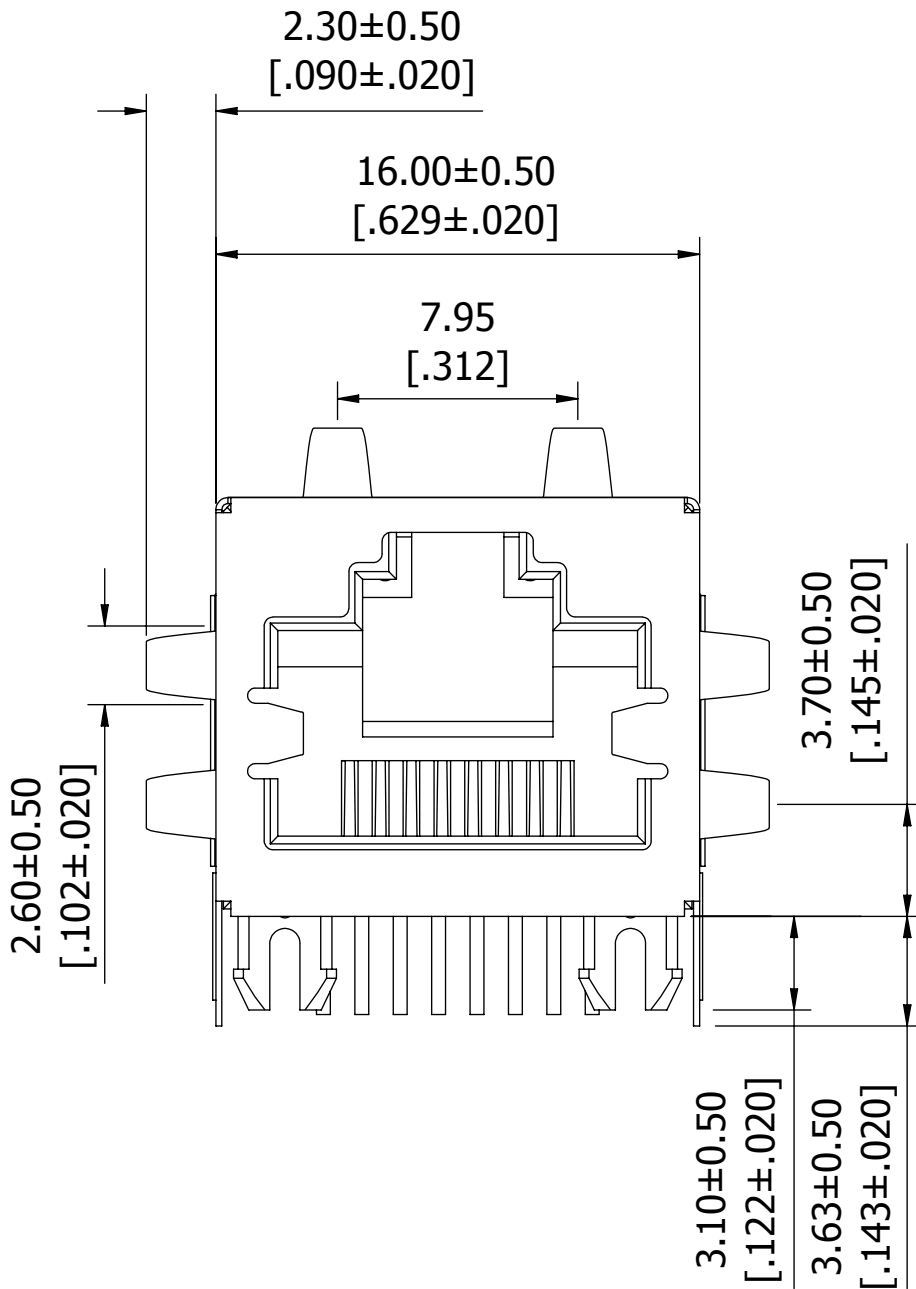


REVISIONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
A	2406	INITIAL RELEASE	08/01/2011	GC
B	2604	UPDATE PAGE 2 SCHEMATIC TD- 2 (WAS RD- 2)	05/31/2012	LH

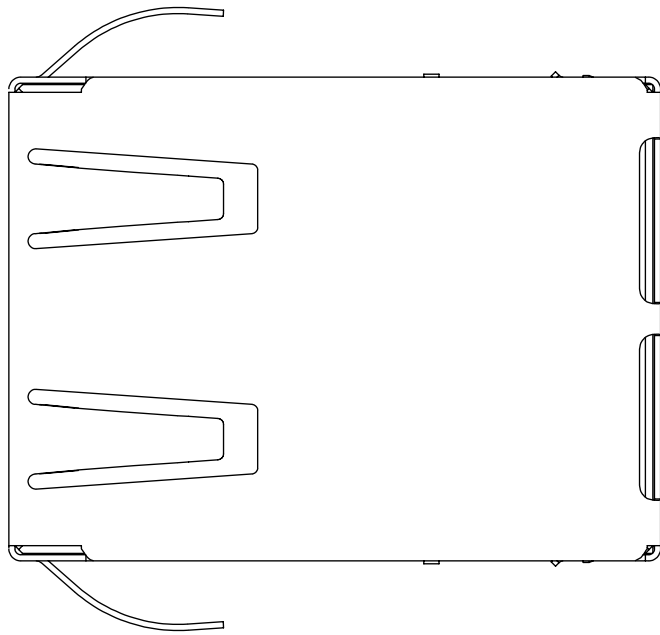

RECOMMENDED P.C.B LAYOUT
TOLERANCE:±0.05 [.002]



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM[INCHES]	DRAWN	DATE	NAME						
		08/01/2011	GC						
	TOLERANCES:			TITLE					
	ANGULAR:			1x1 TAB UP RJ45 10/100 BASE-T WITHOUT LED					
DECIMALS: .X=± .25 [.01] .XX=± .15 [.006] .XXX=± .100 [.0040]			THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.			PART NUMBER		SMJ102-S88I-DS-11	
			SIZE		CAGE CODE		DWG. NO.		REV
			C		54453		11820		B
			SCALE: 4:1				SHEET 1 OF 2		

