MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH – ENCLOSED

CATALOG LISTING
203LS1

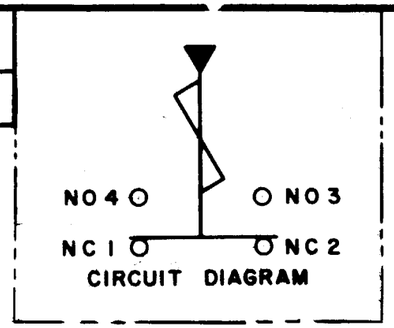

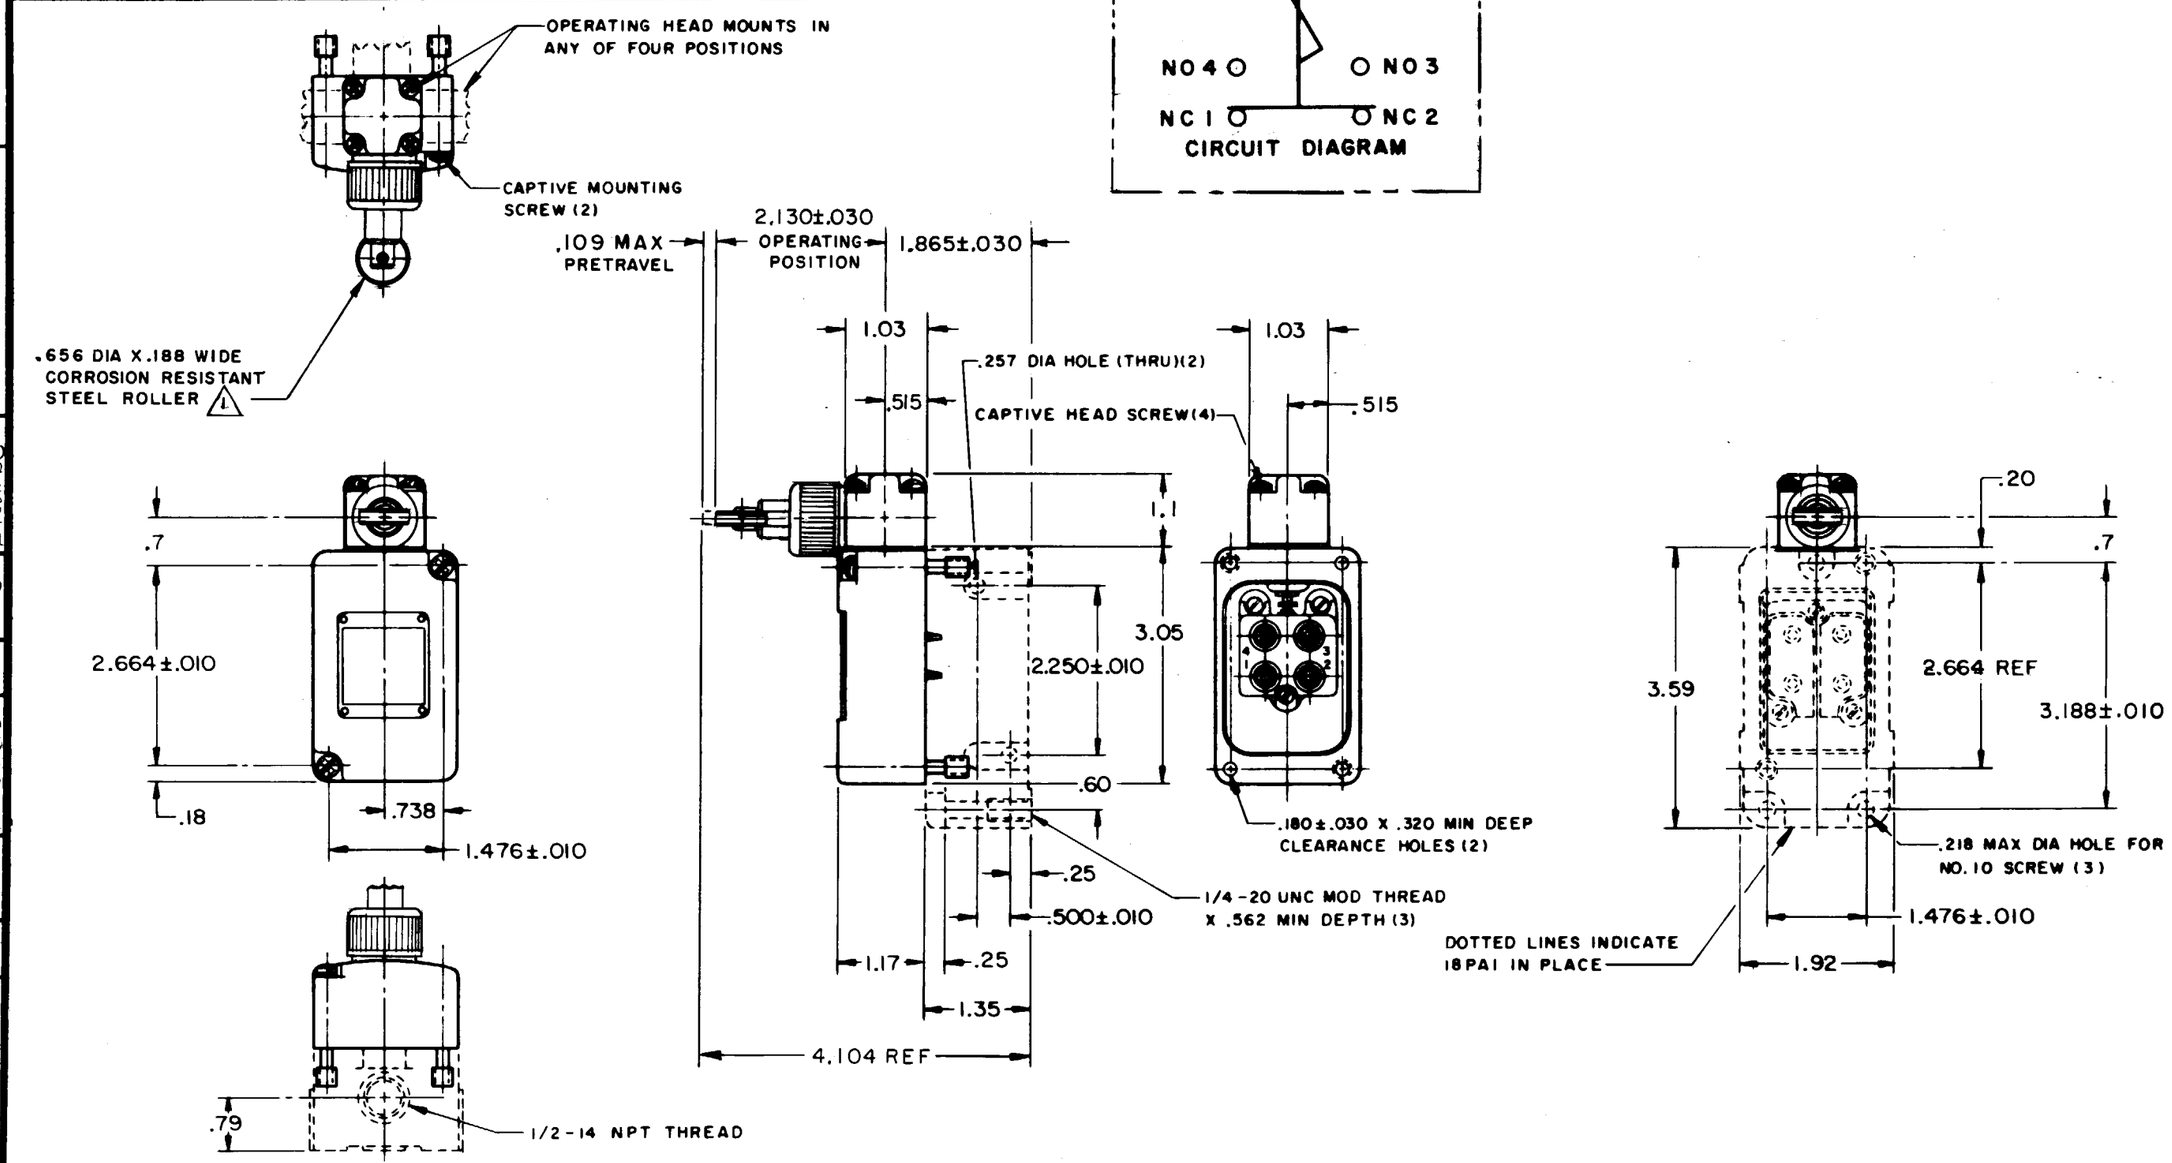

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — 9 LB MAX

RELEASE FORCE — — — — 2 LB MIN

DIFFERENTIAL TRAVEL — — — .040 MAX

OVERTRAVEL — — — — — .219 MIN

B SWITCH – BASIC REPLACEMENT — — — — 2MN9

ELECTRICAL DATA

CONTACT ARRANGEMENT
(SEE CIRCUIT DIAGRAM)

10A-120, 240, OR 480 VAC, 1/3 HP - 120 VAC
3/4 HP - 240 VAC; 0.8A - 115 VDC; 0.4A - 230 VDC
.1A - 550 VDC
PILOT DUTY: 600 VAC MAX

SCALE 1/2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

NOTE–

1 – ROLLER LEVER MAY BE LOCKED IN ANY POSITION THRU 360°

REVISIONS			
A	CO15200	M B F 22 JUNE 65	
B	CO22566	M B F 20 MAR 67	
C	CO25152	M B S 24 APR 69	
D	CO26198	M B S 5 NOV 69	
E	CO26824	M B S 6 JAN 70	
F	CO-77031	J D B 22 DEC 93	

REPLACES | RELEASE NO. | DRAWING NUMBER M 203LS1 | ISSUE 9 | CHECK WCS 24 JUN 65 | CHECK NRA 24 JUN 65 | CHECK LSD 24 JUN 65 | DRAWN M B F 22 JUNE 65

FO-50378-003