

KA741


Single Operational Amplifier

Features


- Short circuit protection
- Excellent temperature stability
- Internal frequency compensation
- High Input voltage range
- Null of offset

Description


The KA741 series are general purpose operational amplifiers. It is intended for a wide range of analog applications. The high gain and wide range of operating voltage provide superior performance in integrator, summing amplifier, and general feedback applications.

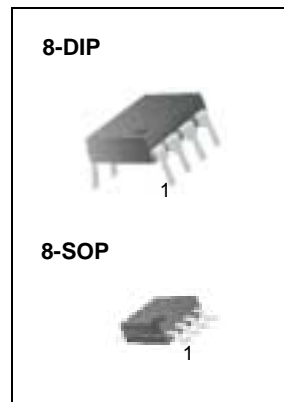

Internal Block Diagram

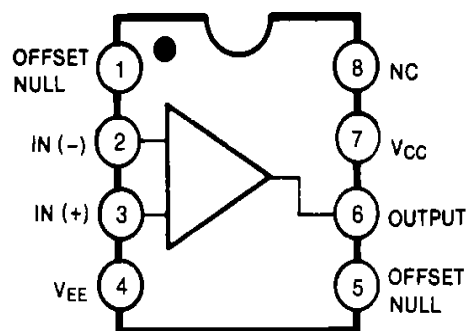

Schematic Diagram

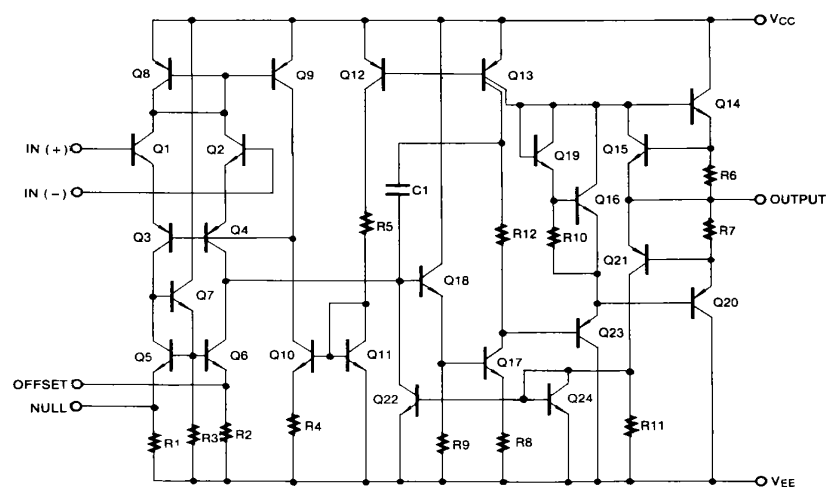

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$)

| Parameter | Symbol | Value | Unit |
|--|---------------|-----------------------|------------------|
| Supply Voltage | VCC | ± 18 | V |
| Differential Input Voltage | $V_{I(DIFF)}$ | 30 | V |
| Input Voltage | V_I | ± 15 | V |
| Output Short Circuit Duration | - | Indefinite | |
| Power Dissipation | PD | 500 | mW |
| Operating Temperature Range KA741 KA741I | TOPR | 0 ~ + 70 -40 ~ +85 | $^\circ\text{C}$ |
| Storage Temperature Range | TSTG | -65 ~ + 150 | $^\circ\text{C}$ |

Electrical Characteristics

(VCC = 15V, VEE = - 15V. TA = 25 °C, unless otherwise specified)

| Parameter | | Symbol | Conditions | KA741/KA741I | | | Unit |
|---------------------------------------|-----------|---------------------|---|---|------|------|------|
| | | | | Min. | Typ. | Max. | |
| Input Offset Voltage | | V _{IO} | R _S ≤ 10KΩ | - | 2.0 | 6.0 | mV |
| | | | R _S ≤ 50Ω | - | - | - | |
| Input Offset Voltage Adjustment Range | | V _{IO(R)} | VCC = ±20V | - | ±15 | - | mV |
| Input Offset Current | | I _{IO} | - | - | 20 | 200 | nA |
| Input Bias Current | | I _{BIAS} | - | - | 80 | 500 | nA |
| Input Resistance (Note1) | | R _I | VCC = ±20V | 0.3 | 2.0 | - | MΩ |
| Input Voltage Range | | V _{I(R)} | - | ±12 | ±13 | - | V |
| Large Signal Voltage Gain | | G _V | R _L ≥ 2KΩ | VCC = ±20V, V _{O(P-P)} = ±15V | - | - | V/mV |
| | | | | VCC = ±15V, V _{O(P-P)} = ±10V | 20 | 200 | |
| Output Short Circuit Current | | I _{SC} | - | - | 25 | - | mA |
| Output Voltage Swing | | V _{O(P-P)} | VCC = ±20V | R _L ≥ 10KΩ | - | - | V |
| | | | | R _L ≥ 2KΩ | - | - | |
| | | | VCC = ±15V | R _L ≥ 10KΩ | ±12 | ±14 | |
| | | | | R _L ≥ 2KΩ | ±10 | ±13 | |
| Common Mode Rejection Ratio | | CMRR | R _S ≤ 10KΩ, V _{CM} = ±12V | 70 | 90 | - | dB |
| | | | R _S ≤ 50Ω, V _{CM} = ±12V | - | - | - | |
| Power Supply Rejection Ratio | | PSRR | VCC = ±15V to VCC = ±15V R _S ≤ 50Ω | - | - | - | dB |
| | | | VCC = ±15V to VCC = ±15V R _S ≤ 10KΩ | 77 | 96 | - | |
| Transient Response | Rise Time | T _R | Unity Gain | - | 0.3 | - | μs |
| | Overshoot | OS | | - | 10 | - | % |
| Bandwidth | | BW | - | - | - | - | MHz |
| Slew Rate | | SR | Unity Gain | - | 0.5 | - | V/μs |
| Supply Current | | I _{CC} | R _L = ∞Ω | - | 1.5 | 2.8 | mA |
| Power Consumption | | P _C | VCC = ±20V | - | - | - | mW |
| | | | VCC = ±15V | - | 50 | 85 | |

Note:

1. Guaranteed by design.

Electrical Characteristics

($V_{CC} = \pm 15V$, unless otherwise specified)

The following specification apply over the range of $0^{\circ}C \leq T_A \leq +70^{\circ}C$ for the KA741; and the $-40^{\circ}C \leq T_A \leq +85^{\circ}C$ for the KA741I

| Parameter | Symbol | Conditions | KA741/KA741I | | | Unit |
|------------------------------|--------------------------|---|--|----------|----------|-------------------|
| | | | Min. | Typ. | Max. | |
| Input Offset Voltage | V_{IO} | $R_S \leq 50\Omega$ | - | - | - | mV |
| | | $R_S \leq 10K\Omega$ | - | - | 7.5 | |
| Input Offset Voltage Drift | $\Delta V_{IO}/\Delta T$ | - | - | - | - | $\mu V/^{\circ}C$ |
| Input Offset Current | I_{IO} | - | - | - | 300 | nA |
| Input Offset Current Drift | $\Delta I_{IO}/\Delta T$ | - | - | - | - | nA/ $^{\circ}C$ |
| Input Bias Current | I_{BIAS} | - | - | - | 0.8 | μA |
| Input Resistance (Note1) | R_I | $V_{CC} = \pm 20V$ | - | - | - | M Ω |
| Input Voltage Range | $V_{I(R)}$ | - | ± 12 | ± 13 | - | V |
| Output Voltage Swing | $V_{O(P-P)}$ | $V_{CC} = \pm 20V$ | $R_S \geq 10K\Omega$ | - | - | V |
| | | | $R_S \geq 2K\Omega$ | - | - | |
| | | $V_{CC} = \pm 15V$ | $R_S \geq 10K\Omega$ | ± 12 | ± 14 | |
| | | | $R_S \geq 2K\Omega$ | ± 10 | ± 13 | |
| Output Short Circuit Current | I_{SC} | - | 10 | - | 40 | mA |
| Common Mode Rejection Ratio | CMRR | $R_S \leq 10K\Omega$, $V_{CM} = \pm 12V$ | 70 | 90 | - | dB |
| | | $R_S \leq 50\Omega$, $V_{CM} = \pm 12V$ | - | - | - | |
| Power Supply Rejection Ratio | PSRR | $V_{CC} = \pm 20V$ to $\pm 5V$ | $R_S \leq 50\Omega$ | - | - | dB |
| | | | $R_S \leq 10K\Omega$ | 77 | 96 | |
| Large Signal Voltage Gain | G_V | $R_S \geq 2K\Omega$ | $V_{CC} = \pm 20V$, $V_{O(P-P)} = \pm 15V$ | - | - | V/mV |
| | | | $V_{CC} = \pm 15V$, $V_{O(P-P)} = \pm 10V$ | 15 | - | |
| | | | $V_{CC} = \pm 15V$, $V_{O(P-P)} = \pm 2V$ | - | - | |

Note :

1. Guaranteed by design.

Typical Performance Characteristics

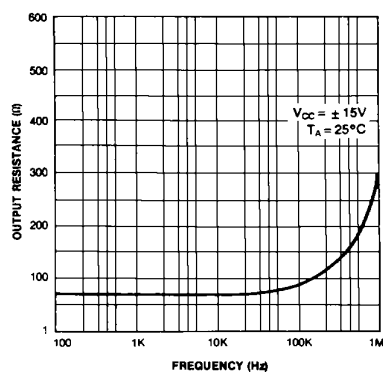


Figure 1. Output Resistance vs Frequency

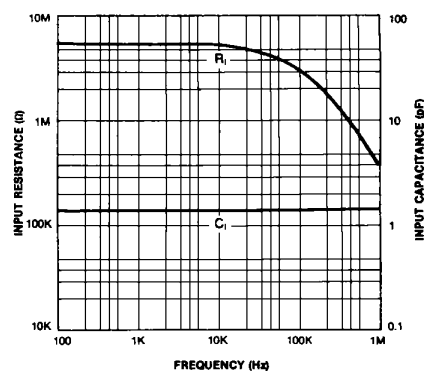


Figure 2. Input Resistance and Input Capacitance vs Frequency

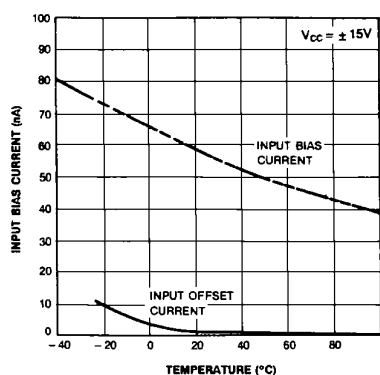


Figure 3. Input Bias Current vs Ambient Temperature

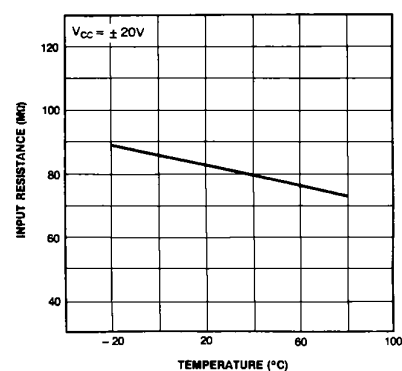


Figure 4. Power Consumption vs Ambient Temperature

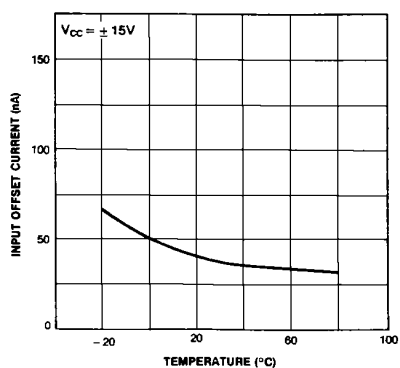


Figure 5. Input Offset Current vs Ambient Temperature

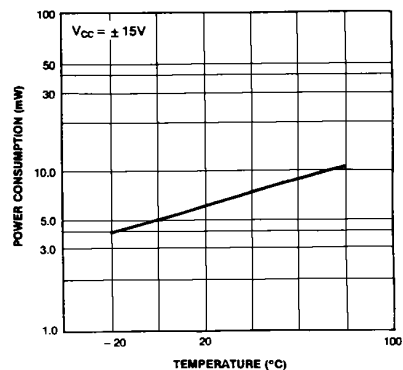


Figure 6. Input Resistance vs Ambient Temperature

Typical Performance Characteristics (continued)

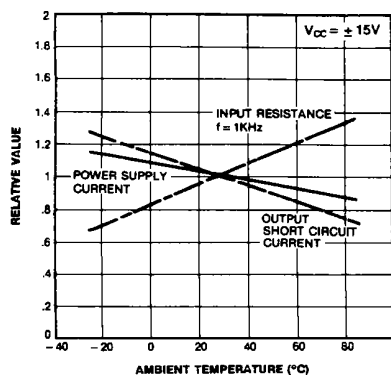


Figure 7. Normalized DC Parameters vs Ambient Temperature

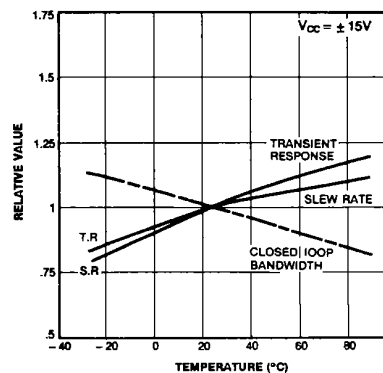


Figure 8. Frequency Characteristics vs Ambient Temperature

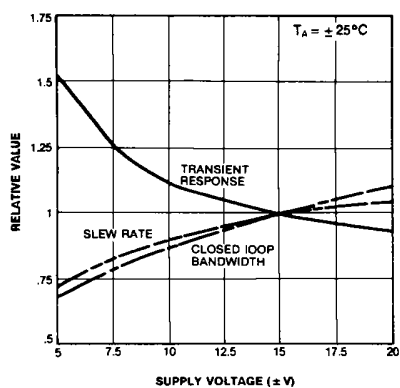


Figure 9. Frequency Characteristics vs Supply Voltage

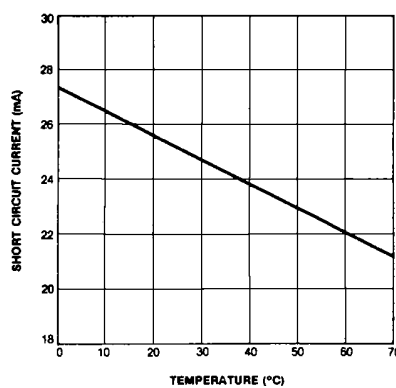


Figure 10. Output Short Circuit Current vs Ambient Temperature

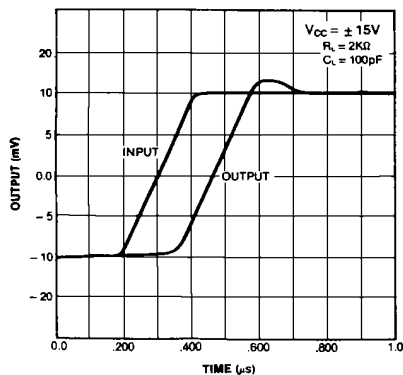


Figure 11. Transient Response

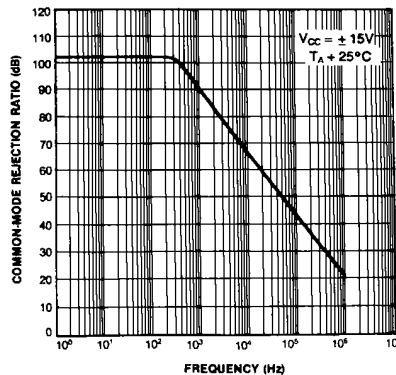


Figure 12. Common-Mode Rejection Ratio vs Frequency

Typical Performance Characteristics (continued)

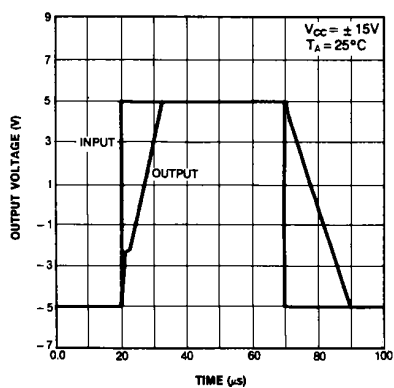


Figure 13. Voltage Follower Large Signal Pulse Response


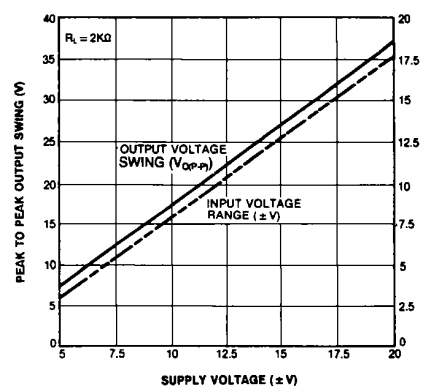


Figure 14. Output Swing and Input Range vs Supply Voltage

Mechanical Dimensions

Package

8-DIP

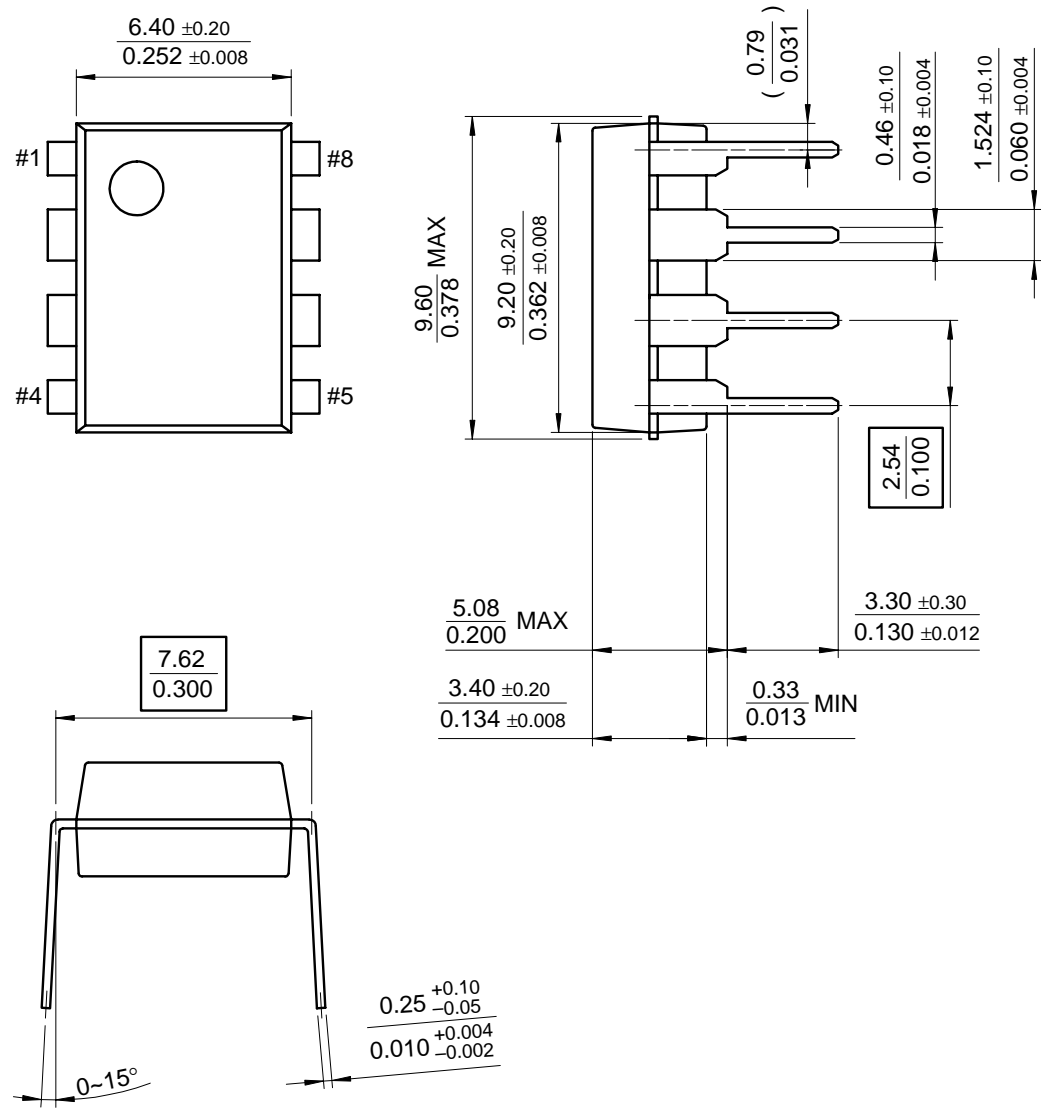

Ordering Information

| Product Number | Package | Operating Temperature |
|----------------|---------|-----------------------|
| KA741 | 8-DIP | 0 ~ + 70°C |
| KA741D | 8-SOP | |
| KA741I | 8-DIP | -40 ~ + 85°C |

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.