

HE3300 S.I.L Relay Features and Benefits



Features

- Miniature single in line package
- Available with 5V, 12V or 24V coil options as standard
- High voltage and power switching versions
- Normally open, normally closed, and change over contact configurations available
- External magnetic shield option

Benefits

- Single in line configuration allows high packing densities, minimising space and cost
- Lower power coil consumption than competing electromechanical devices
- Hermetically sealed switching contact is immune to the effects of its environment
- Transfer moulded package gives maximum component protection

Applications

- Security
- Telecoms
- Instrumentation
- Process Control
- Automatic Test Equipment

DIMENSIONS (in) mm

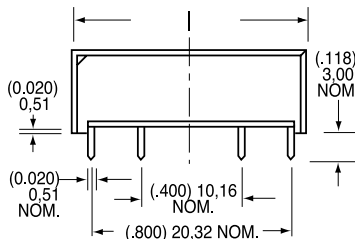


Figure 1 HE3321A, HE3351A, HE3361A, HE3321B

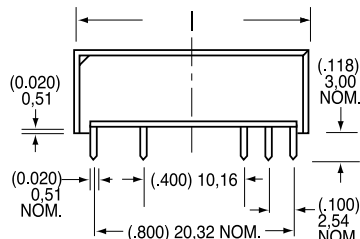


Figure 2 HE3321C

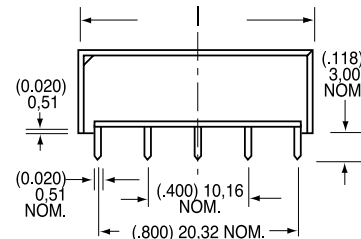


Figure 3 HE3321E




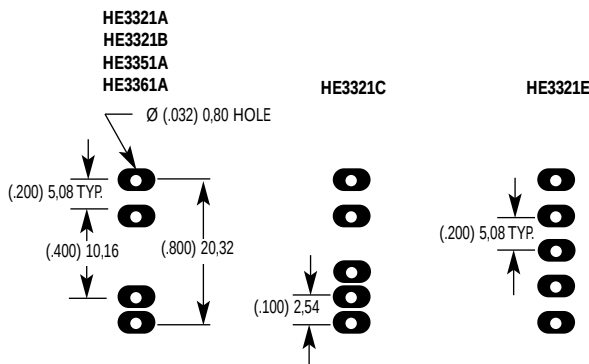
Figure 4 HE3300 (All)

Table 1

Relay Type	Body Type	l	w	h
HE3300	Transfer Molded	(.950) 24,13	(.300) 7,62	(.335) 8,51
	External Shield	(.980) 24,90	(.320) 8,12	(.345) 8,76

HE3300 PCB LAYOUT (Bottom View)

ORDERING INFORMATION



PART NUMBER HE33XX X XX XX

Model Number

HE3321 - Standard
HE3351 - High Voltage
HE3361 - Power Switching

Contact Type

A - Form A (SPST-NO)
B - Form B (SPST-NC)
C - Form C (SPDT-CO)
E - Form C (SPDT-CO) alternate foot print

EXAMPLE: The HE3321A0540 is a 1 Form relay with a 5 Volt coil and external magnetic shield

General Options

00 - No Options
40 - External Magnetic Shield

Standard Coil

05 - 5 Volt
12 - 12 Volt
24 - 24 Volt







See next page for: Electrical and Operating Characteristics Description and Coil Characteristics

USA
UK
Germany
France

Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales@hamlin.com
Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: uksales@breedtech.com
Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 953666 • Email: hamlin-electronics.de@breedtech.com
Tel: +33 1 46 87 02 02 • Fax: +33 1 46 86 67 86 • Email: hamectrol@hamectrol.fr

ISSUE No: 3 DATE: 28/09/01 SIGNED: Alvaro Saldana

Table 2 HE3300 Series  Recognised File #E47258			Electrical and Operating Characteristics @ 25°C.				
Column Number			1	2	3	4	5
Contact Type			Form A SPST-NO Standard	Form A SPST-NO High Voltage	Form A SPST-NO Power Switching	Form C SPST-CO Standard	Form B SPST-NC Standard
Relay Types			HE3321A	HE3351A	HE3361A	HE3321C, E	HE3321B
CONTACT RATINGS Contact Hamlin for specific load/life details	Power, Switching Voltage, Switching Current, Switching Current, Carry	Watt - max.	10	20	50	5	10
		Vdc - max.	200	250	200	175	200
		A - max.	0.5	1.0	1.5	0.25	0.5
		A - max.	1.2	1.5	2.0	1.5	1.2
VOLTAGE HOLD-OFF	Across Open Contacts Contacts to Coil	Vdc - min.	250	600	300	200	250
		Vac - min.	2500	2500	2500	2500	2500
RESISTANCE	Contact, Initial Insulation: Across Open Contacts Between Isolated Terminals	Ω - max.	0.150	0.150	0.150	0.200	0.150
		Ω - min.	10 ¹⁰	10 ¹⁰	10 ¹⁰	10 ⁹	10 ¹⁰
		Ω - min.	10 ¹⁰	10 ¹⁰	10 ¹⁰	10 ¹⁰	10 ¹⁰
TIMING	Operate Time Release Time	ms - max.	1.0	1.0	1.0	3.0	1.0
		ms - max.	1.0	1.0	1.0	3.0	1.0
ENVIRONMENTAL	Temperature, Operating Temperature, Storage Vibration Resistance	°C	-40 to +85	-20 to +85	-40 to +85	-40 to +85	-40 to +85
		°C	-40 to +105	-40 to +105	-40 to +105	-40 to +105	-40 to +105
		G - max. 10-2000 Hz.	20	20	20	20	20
	Shock Resistance	G - max.	50	50	50	50	50
		11 ms, ½ sine					

Table 3 HE3300 Series Relay						Coil Characteristics @ 25°C.			
Contact Form & Type	Electrical & Operating Characteristics	Dimensions	Part Number	Nominal Coil Voltage Vdc	Coil Resistance ±10% Ohms	Must Operate Vdc	Must Release Vdc	Maximum Coil Voltage Vdc	Top View 2,54 mm, 0.1 in. Grid Dot on Case: Pin 1 Numbers not printed on case.
1A SPST-NO	See Table 2 Column 1	See Figure 1	HE3321A0400	5	500	3.75	0.5	22	
			HE3321A1200	12	500	9.0	1.0	22	
			HE3321A2400	24	2000	18.0	2.0	44	
1B SPST-NC	See Table 2 Column 5	See Figure 1	HE3321B0400	5	500	3.75	0.5	See Note 1, 2 6.5	
			HE3321B1200	12	500	9.0	1.0	14.0	
			HE3321B2400	24	2000	18.0	2.0	28.0	
1C SPDT-CO	See Table 2 Column 4	See Figure 2	HE3321C0500	5	125	3.75	0.5	11	
			HE3321C1200	12	500	9.0	1.0	22	
			HE3321C2400	24	2000	18.0	2.0	44	
1C SPDT-CO	See Table 2 Column 4	See Figure 3	HE3321E0500	5	125	3.75	0.5	11	
			HE3321E1200	12	500	9.0	1.0	22	
			HE3321E2400	24	2000	18.0	2.0	44	
1A SPST-NO High Voltage	See Table 2 Column 2	See Figure 1	HE3351A0500	5	125	3.75	0.5	11	
			HE3351A1200	12	500	9.0	1.0	22	
			HE3351A2400	24	2000	18.0	2.0	44	
1A SPST-NO Power Switching	See Table 2 Column 3	See Figure 1	HE3361A0500	5	125	3.75	0.5	11	
			HE3361A1200	12	500	9.0	1.0	22	
			HE3361A2400	24	2000	18.0	2.0	44	

- Notes: 1) HE3321B - Exceeding recommended voltage may cause contact reclosure.
2) External magnetic shielding not available on 12 and 24 Volt Form B relays.

INFORMATION PROVIDED ON THIS DATA SHEET IS PROVIDED FOR INFORMATION PURPOSES ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is put. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorised representatives of HAMLIN.