



CODE No.	CONTACT	A	B	C	D	E	F
CL536-0401-2-21	2	1.25	4.15	7.15	5.65	1.95	2.2
CL536-0402-5-21	3	2.5	5.4	8.4	6.9	3.2	3.45
CL536-0403-8-21	4	3.75	6.65	9.65	8.15	4.45	3.1
CL536-0404-0-21	5	5.0	7.9	10.9	9.4	5.7	4.35
CL536-0405-3-21	6	6.25	9.15	12.15	10.65	6.95	5.6
CL536-0406-6-21	7	7.5	10.4	13.4	11.9	8.2	6.85
CL536-0407-9-21	8	8.75	11.65	14.65	13.15	9.45	8.1
CL536-0408-1-21	9	10.0	12.9	15.9	14.4	10.7	9.35
CL536-0409-4-21	10	11.25	14.15	17.15	15.65	11.95	10.6
CL536-0410-3-21	11	12.5	15.4	18.4	16.9	13.2	11.85
CL536-0411-6-21	12	13.75	16.65	19.65	18.15	14.45	13.1
CL536-0413-1-21	14	16.25	19.15	22.15	20.65	16.95	15.6
CL536-0414-4-21	15	17.5	20.4	23.4	21.9	18.2	16.85


RECOMMENDED PATTERN

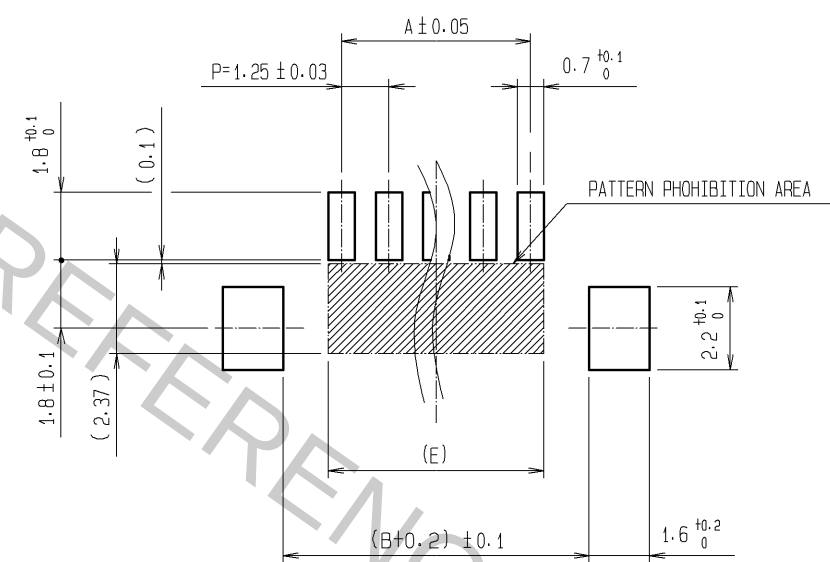

NOTES

- 1 WHEN THIS CONNECTOR MATES WITH DF13-*S-1.25C, THE MATING LENGTH IS 5.8mm.
- 2 WHEN THIS CONNECTOR HAS TWO OR THREE CONTACTS, THE LOCK SHALL BE SET AT THE CENTER OF HOUSING. IF MORE THAN FOUR, THE TWO LOCKS SHALL BE SET AS SHOWN ON THIS DRAWING.
- 3 LEAD CO-PLANARITY INCLUDING REINFORCED METAL FITTINGS SHALL BE WITHIN 0.1mm.
- 4 AREA TO PICK AND PLACE.

3	PHOSPHOR BRONZE	SURFACE: TIN PLATED 1μm min.							
2	BRASS	SURFACE: TIN PLATED 1μm min.		5	POLYESTER	COVER TAPE: CLEAR			
1	POLYAMIDE	UL94V-0, (BEIGE)		4	PS	EMBOSSED CARRIER TAPE: CLEAR			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 5 : 1		COUNT 8	DESCRIPTION OF REVISIONS DIS-H-005399		DESIGNED TS. KUMAZAWA	CHECKED HK. UMEHARA	DATE 10. 12. 14
 HIROSE ELECTRIC CO., LTD.		APPROVED : TY. OMA	05. 10. 31		DRAWING NO.		EDC3-083672-03		
		CHECKED : HK. UMEHARA	05. 10. 31		PART NO.		DF13C-*P-1. 25V<21>		
		DESIGNED : TS. KUMAZAWA	05. 10. 31		CODE NO.		CL536-		
		DRAWN : AK. MIURA	05. 10. 27				 		

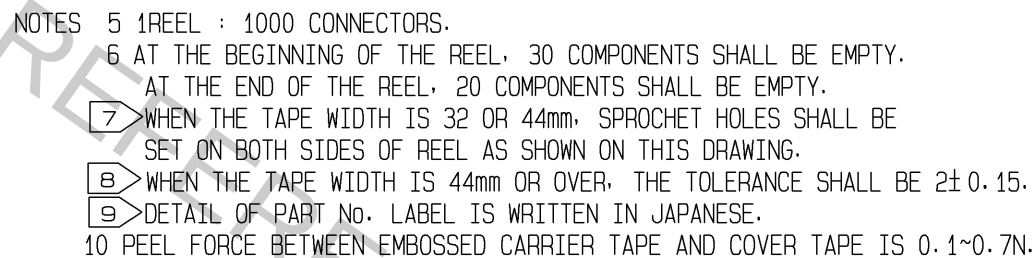

9 DETAIL OF PART No. LABEL

DATE OF MANUFACTURED	年 月 日
CODE No.	
PART No.	DF 13C- $\ast$ P-1.25V(21)
QUANTITY	1000K0
SUPPLIER	HIROSE ELECTRIC CO., LTD.

	DRAWING NO. EDC3-083672-03	
	PART NO. DF13C-*P-1.25V(21)	
	CODE NO. CL536-	 2/2