


DATASHEET


PRODUCT: FL-82 LED-Lens




Ver.	Date	Description	Check	Approval
Α	2010/02/02	Promote new spec. document and issue	Alan	Jerry

CONTENT

1.	HOME PAGE	1
2.	LIST/REVISED HISTORY	2
	TYPICAL APPLICATION	
	MECHANICAL DIMENSION	
	REPRESENTATIVE SPATIAL RADIATION PATTERN	
	PACKING PROCESS	7






Features


- 1. Peak 120° X70° view angle
- 2. Works with OSRAM Golden Dragon PLUS LED and compatible LED

Typical Applications


- 1. portable light source (e. g. bicycle, flashlight)
- 2. signal and symbol luminaire for orientation
- 3. marker lights (e.g. steps, exit ways, etc.)
- 4. indoor and outdoor commercial and residential architectural lighting
- 5. tunnel lighting
- 6. street lighting
- 7. special backlighting



Mechanical Dimensions

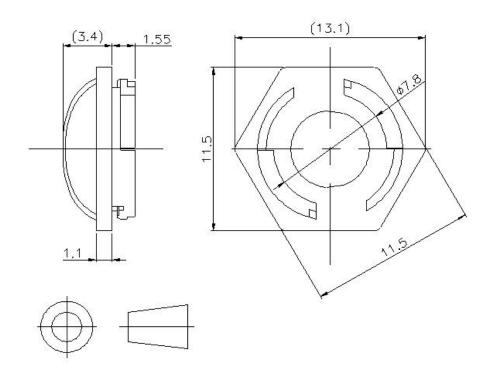


@SHOWIN 尚瀅科技股份有限公司

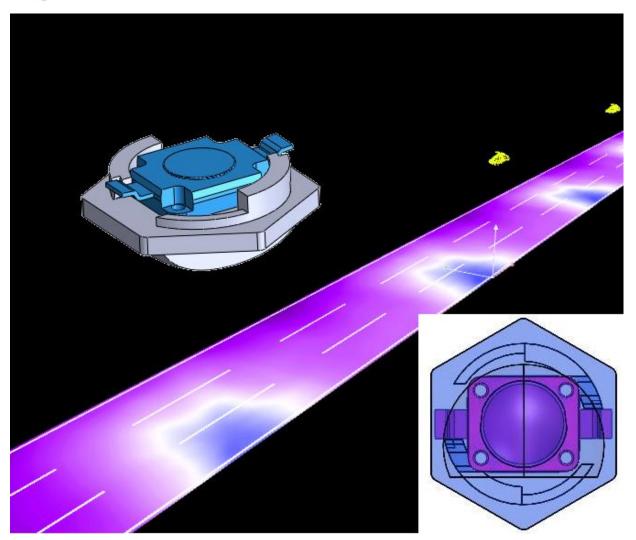

Notes:

- 1. All dimensions are in millimeter(mm) unless otherwise specified.
- 2. General tolerance is ± 0.1 mm unless otherwise noted.
- 3. Protruding of the gate from the side surface is less than 0.3mm.
- 4. Do not subject to temperatures greater than 110°C as plastic deformation may occur. Protect collimator against exposure to solvents and adhesives that are not compatible with it. Use care in handling the optic to avoid scratches or other damage that will effect upon the optical performance.



Representative Spatial Radiation Pattern


Simulation using LUXEON Rebel of PHILIPS Lumileds LED:


 $I_{rel} = f(\varphi)$

 I_{rel} : Relative Intensity

φ : Angular Displacement

— CO-C180

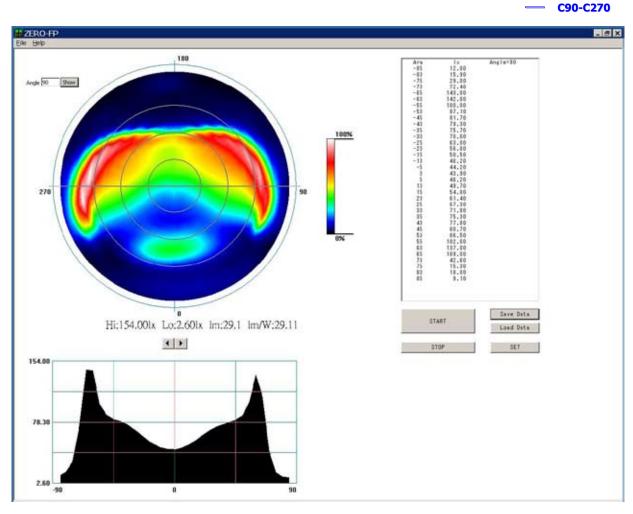




Packing Process

There are three steps of packing process that is:250 lenses into a tray, two trays and two desiccants into a packing bag, ten packages into a carton.

Detail as follows:

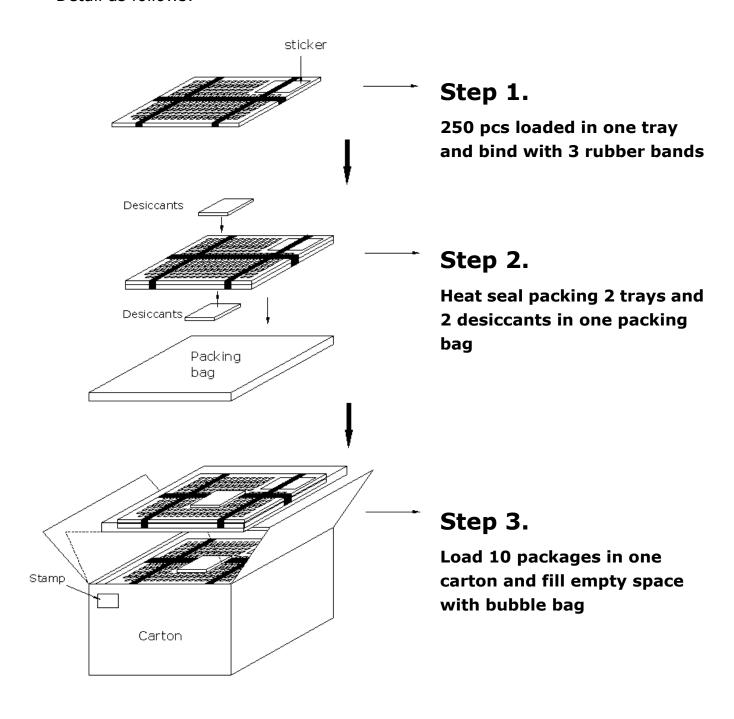

3 Clerewater Place, Thatcham, RG19 3RF, UK
Tel: +44 (0)1635 294606 Fax: +44 (0)1635 869200
Email: info@i-led.co.uk www.i-led.co.uk