



LUXEON TX

Extreme efficacy and best performance with compatibility to LUXEON T



LUXEON TX is designed to deliver high efficacy with high flux density to enable tight beam control in directional and high lumen applications. With *Freedom from Binning* and leading performance, LUXEON TX LEDs are specified, targeted and tested hot, at real world operating temperatures, 85°C, to ensure in-application performance. LUXEON TX LEDs allow system optimization by blending the perfect combination of high efficacy and low system cost, while tight correlated color temperature ensures consistency in system color point.

FEATURES AND BENEFITS

- Maximum drive current of 1.5A
- High lumen package and compact source size for design flexibility and reduced LED count
- Freedom from Binning* with 3- and 5-step MacAdam ellipse
- Exceeds ENERGY STAR® lumen maintenance requirements
- 70, 80 and 85CRI minimum and full CCT range available

PRIMARY APPLICATIONS

- Downlights
- High Bay & Low Bay
- Lamps
- Outdoor
- Spotlights


LUXEON TX product performance at 700mA and 350mA, T_j=85°C.

NOMINAL CCT	MINIMUM CRI ^[1]	LUMINOUS FLUX ^[2] (lm)		TYPICAL LUMINOUS EFFICACY (lm/W)	TYPICAL LUMINOUS FLUX (lm)	TYPICAL LUMINOUS EFFICACY (lm/W)	PART NUMBER
		MINIMUM	TYPICAL				
		700mA				350mA	
3000K	70	230	245	125	135	142	L1T2-30700000000000
4000K	70	250	269	137	147	155	L1T2-40700000000000
5000K	70	260	275	140	151	159	L1T2-50700000000000
5700K	70	260	275	140	151	159	L1T2-57700000000000
6500K	70	260	275	140	151	159	L1T2-65700000000000
2700K	80	200	216	110	118	124	L1T2-27800000000000
3000K	80	210	227	116	124	131	L1T2-30800000000000
3500K	80	220	238	121	130	137	L1T2-35800000000000
4000K	80	230	247	126	136	143	L1T2-40800000000000
5000K	80	230	247	126	136	143	L1T2-50800000000000
2700K	85	170	186	95	102	108	L1T2-27850000000000
3000K	85	180	197	101	108	114	L1T2-30850000000000
3500K	85	190	208	106	114	120	L1T2-35850000000000
4000K	85	200	217	111	120	127	L1T2-40850000000000
5000K	85	200	217	111	120	127	L1T2-50850000000000
2700K	90	160	175	89	96	101	L1T2-27900000000000
3000K	90	170	188	96	103	109	L1T2-30900000000000

Notes:

1. Lumileds maintains a tolerance of ± 2 on CRI.
2. Lumileds maintains a tester tolerance of $\pm 6.5\%$ on luminous flux measurements.

Mechanical Dimensions.

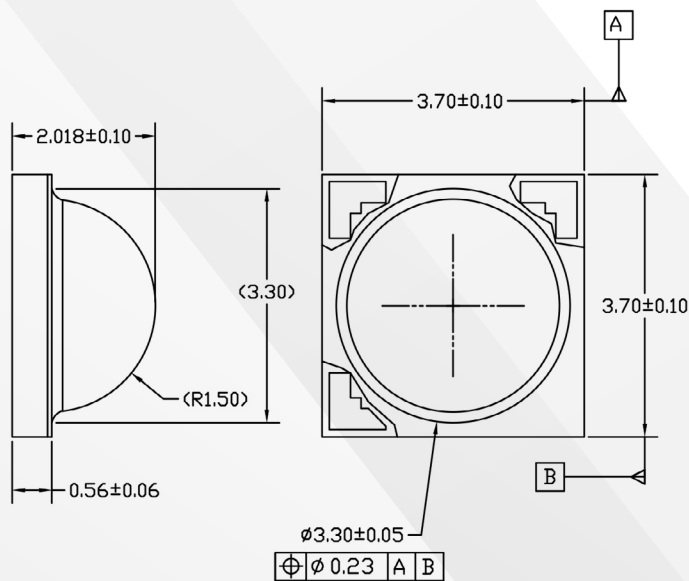

Notes:

1. Drawings are not scale.
2. All dimensions are in millimeters.

©2015 Lumileds Holding B.V. All rights reserved.
LUXEON is a registered trademark of the Lumileds Holding B.V.
in the United States and other countries.

lumileds.com

Neither Lumileds Holding B.V. nor its affiliates shall be liable for any kind of loss of data or any other damages, direct, indirect or consequential, resulting from the use of the provided information and data. Although Lumileds Holding B.V. and/or its affiliates have attempted to provide the most accurate information and data, the materials and services information and data are provided "as is," and neither Lumileds Holding B.V. nor its affiliates warrants or guarantees the contents and correctness of the provided information and data. Lumileds Holding B.V. and its affiliates reserve the right to make changes without notice. You as user agree to this disclaimer and user agreement with the download or use of the provided materials, information and data.