

The AN100 Announcer™

AN100SAMPLE

**Made in
USA**



The Announcer™ is a small and efficient device for playing pre-recorded voice and audio messages. It is exactly the same size as a piezo alarm. The Announcer can act as a direct replacement wherever standard piezo alarms are used.

The Announcer will play a single message (up to 10 seconds stored within memory) upon the application of power a single time or continue repeat the message until power is removed.


Some uses include:

- Playing promotional messages during an in-store or trade show promotional display.
- Adding safety and awareness to vehicles or machines by replacing an ambiguous "beep."
- Broadcasting a message in public places such as shopping malls, museum information plaques, airports, building lobbies, casinos/gaming machines, restaurants, movie theatres, kiosks, gas station pumps, etc.
- The applications for a self-contained playback device are limitless. Just add power!

Please call to discuss your application with our Sales Engineer or help with Human Factor design.

SPECIFICATIONS

Operating Mode:	Play message or tone when power is applied.
Operating Voltage:	5-15 VDC
Nominal Operating Voltage:	12 VDC
Frequency Response:	500 Hz to 10KHz
Typical Operating Current:	250mA peak @ 12Vdc
Typical Sound Pressure:	80±5 dB(A), at 5 VDC, at 24 inches (61 cm), at 25°C, 90±5 dB(A), at 15 VDC, at 24 inches (61 cm), at 25°C.
Termination:	2 .25" Quick Connect Blades
Termination Strength:	Pull test with a maximum of 22 pounds (10 kg) load
Operating Temperature:	-20°C to +65°C.
Storage Temperature:	-40°C to +85°C.
Surge Voltage:	20% over maximum rated voltage for less than 5 minutes.
Reverse Voltage Protection:	To the maximum operating voltage.
Construction Materials:	Case- Plastic "NORYL® N-190", Flame Retardant UL 94-VO, Black

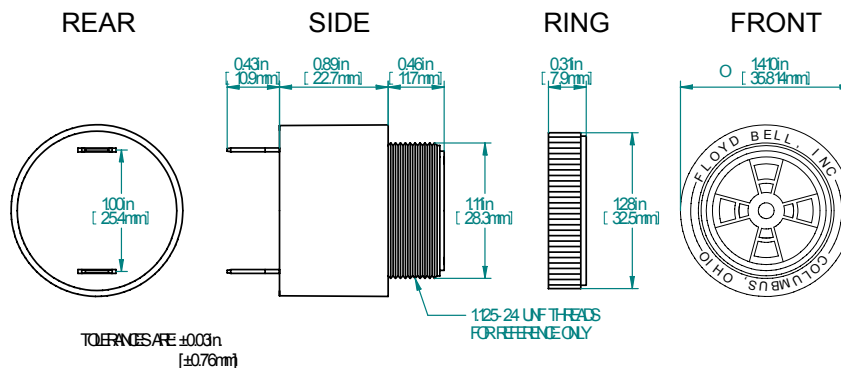

Floyd Bell Inc
An ISO 9001:2000 Registered Company

720 Dearborn Park Lane • Columbus, OH 43085
Tel: 614/294-4000 • Fax: 614/291-0823
Website: www.floydbell.com

Revision: Preliminary